

TC18, TC21, TC21D CONTENTS

SECTION 1 - ENGINE SYSTEMS

SECTION 2 - FUEL SYSTEM

SECTION 3 - ELECTRICAL SYSTEM

SECTION 4 - SINGLE CLUTCH

SECTION 5 - TRANSMISSION SYSTEMS

SECTION 6 - POWER TAKE-OFF SYSTEMS

SECTION 7 - DIFFERENTIAL, REAR AXLE, AND BRAKES

SECTION 8 - HYDRAULIC SYSTEM

SECTION 9 - STEERING SYSTEM

SECTION 10 - FRONT AXLE AND RELATED PARTS

SECTION 11 - WHEELS AND TIRES

SECTION 12 - SEPARATING THE TRACTOR

SECTION 1

ENGINE SYSTEMS

CONTENTS

GENERAL INFORMATION	1-2
ENGINE OVERHAUL	1-4
DISASSEMBLY, INSPECTION, AND ASSEMBLY OF COMPONENT ASSEMBLIES	1-14
ENGINE RE-ASSEMBLY	1-35
ENGINE LUBRICATION SYSTEM	1-46
COOLING SYSTEM	1-52
COOLING SYSTEM OVERHAUL	1-55
TROUBLESHOOTING	1-63
SPECIFICATIONS	1-69
TORQUE SPECIFICATIONS	1-77
SPECIAL TOOLS	1-78
INDEX	2-30

GENERAL INFORMATION

DESCRIPTION AND OPERATION

This section describes the engine overhaul and repair procedures of the Models TC18, TC21, and TC21D tractors. Repair procedures are essentially the same for all models except as noted in the repair procedures.

The tractors are equipped with three-cylinder in-line engines. They are all four cycle, overhead valve, liquid cooled engines. The engines are identified by a code cast into the lower right side of the cylinder block, just behind the hydraulic pump. The identification numbers of the engines used is shown in the following chart.

IDENTIFICATION CHART

ENGINE IDENTIFICATION	TRACTOR MODEL	HORSE-POWER
S753	TC18	18.5
S773	TC21 & TC21D	21.0

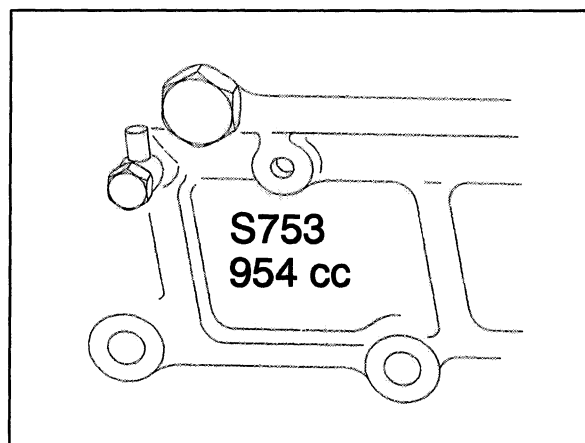


Figure 1-1

CYLINDER HEAD AND VALVE TRAIN COMPONENTS

The cylinder head incorporates the valve assemblies, rocker arms, rocker shaft, push rods, lifters, and pre-combustion chambers. The air intake manifold is incorporated into the left hand side of the valve cover assembly. The exhaust manifold is bolted on the left-hand side of the cylinder head. The cylinder heads have integral valve guides. Standard size valves only are used. Figure 1-2 provides a cut-away front and side view of an engine.

A pre-combustion chamber is located between the injector assembly and the combustion chamber of the cylinder and provides an area for initial ignition of the fuel for improved starting. A glow plug located in the head extends into the pre-combustion chamber and, when energized, pre-heats the fuel-air mixture for improved fuel ignition under cold weather conditions.

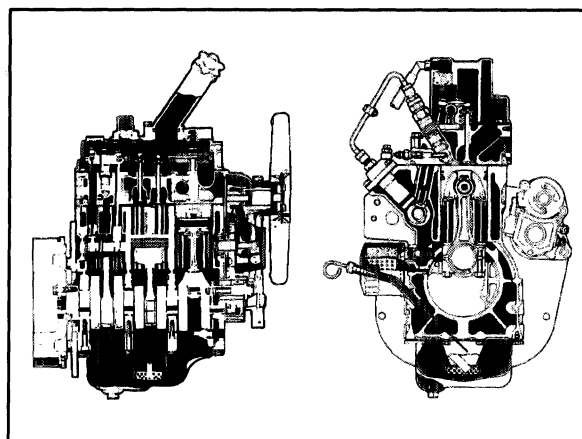


Figure 1-2

CYLINDER BLOCK ASSEMBLY

The cylinder block assembly contains the pistons, connecting rods, crankshaft, timing gears, and engine oil pump. The engine crankshaft is supported by four main bearings. The front main bearing is a full circle bearing positioned in a bore in the front of the block. The

second, third, and fourth main bearings are split liners located in holders bolted to the block. The camshaft is supported by two ball bearings one located on each end of the block. The engines utilize a straight connecting rod and a three ring piston.

Thank you so much for reading.
Please click the “Buy Now!”
button below to download the
complete manual.



After you pay.

You can download the most
perfect and complete manual in
the world immediately.

Our support email:

ebooklibonline@outlook.com