

Name

QTY

Section: ENGINE CRANKCASE


P/n

Ref: 01.00.0

Notes:

Fig.

0	0.044.0050.6	1	gasket set	
1	0.045.1110.4	1	crankcase	
2	0.037.1155.0	1	bushing	
3	2.1559.111.0/20	2	special bushing	
4	2.1599.144.7	10	shoulder ring 12.5x23x4	
5	0.004.8774.3	1	support	
6	2.1559.090.0/10	1	bushing 14.24x19.06x27	
7	0.037.1114.0	1	support	
8	0.052.1113.0	2	support	
9	0.052.1116.0	1	support	
10	0.021.1157.0	4	stud bolt	
11	2.1019.026.7	10	special nut m 12 p.1.5	
12	0.029.1117.0	6	stud bolt	
13	0.029.1154.0/10	4	gasket	
14	2.1699.114.0	1	pin 8x55	
15	2.1651.711.0	1	pin 8 x 14	
16	2.0432.025.7	2	stud bolt m 8 p.1.25 - 1.00 x 100	
17	0.044.1130.0	1	flange	
18	2.1653.708.0	2	pin 8x18	
19	2.1651.911.0	2	cylindrical plug	
20	2.0432.153.7	2	stud bolt m 10 p.1.5 / p.1.25 x 20	
21	2.0112.511.2	11	screw m 14 p.2 x 30	
22	2.0432.257.7	2	stud bolt m 12 p.1.75 - 1.25 x 30	
23	2.3170.022.1	1	expansion plug 60	
24	2.3130.003.1	2	plug 3/8" gas	
25	2.3130.002.1	1	plug 1/4" gas	
26	0.044.1120.0/40	4	engine cylinder	
27	2.1589.052.0	8	shoulder ring 115x123x0.2	
28	2.1589.051.0	4	shoulder ring 116x123x0.1	
29	2.1569.076.0	4	gasket 116x123x0.5	
30	0.041.1123.0/10	4	stud bolt	
31	0.039.1122.0	16	stud bolt m 12 p.1.5x310	
32	0.044.1156.0	8	special bushing	
33	0.071.1151.3/10	4	valve	
34	2.3130.001.1	4	plug 1/8" gas	
35	2.1651.507.0	2	pin 6 x 16	
36	2.3139.001.1	5	plug	
37	2.0432.003.7	4	stud bolt m 8 p.1.25 / p.1 x 20	
38	0.044.1151.0	1	gasket	
39	0.044.1164.2/10	1	small cover	1/2
40	2.1310.004.2	4	flat washer 8.4x17	1/2

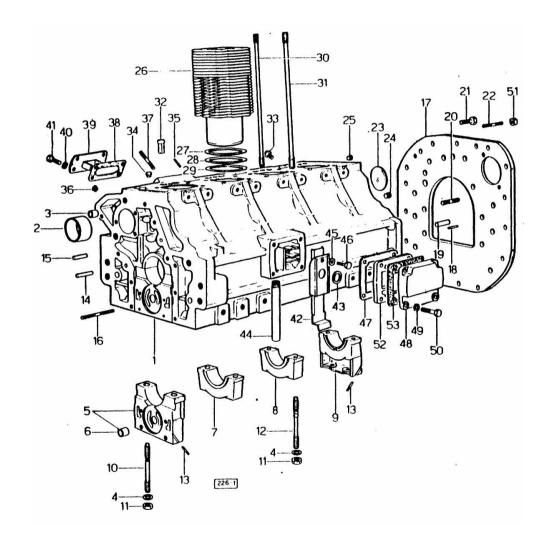

Section: ENGINE CRANKCASE

Ref: 01.00.0


Fig.	P/n	QTY	Name
	'		
41	2.0112.204.2	2	screw m 8 p.1.25x14
42	0.044.1162.2	1	small guard
43	0.071.1156.0	1	special oil seal
44	0.044.1152.0/10	1	tube
45	2.1474.009.2	1	spring washer 8
46	2.0312.206.2	1	screw m 8 p 1.25 x 20
47	0.044.1153.0/10	1	gasket
48	0.044.1163.0	1	cover
49	2.1474.009.2	4	spring washer 8
50	2.0112.211.2	4	screw m 8 p.1.25 x 30
51	2.1011.207.2	2	nut m 12 p.1.5
52	0.044.1160.0/10	1	container
53	0.044.1161.0	1	gasket

Section: ENGINE


Ref: 01.00.1

TIMING CASE

Fig.	P/n	QTY	Name	
Notes:				
[CENTUR	ION 75 SPECIAL]			
1	0.048.1131.0	1	flange	
2	0.041.1153.0/10	1	gasket	
3	2.0112.211.2	3	screw m 8 p.1.25 x 30	
4	2.1474.009.2	5	spring washer 8	
5	2.0119.034.2	1	screw m 14 p.2x20	
6	2.1560.010.0	1	gasket 14.2 x 20	
7	2.0112.207.2	1	screw m 8 p 1.25 x 20	
8	2.1474.009.2	1	spring washer 8	
9	0.041.1152.0/10	1	gasket	
10	2.1519.010.0	1	special oil seal 58x80x10	
11	0.048.1132.0/40	1	guard	
12	2.0112.217.2	5	screw m 8 p.1.25 x 45	
13	2.1474.009.2	5	spring washer 8	
14	2.1560.003.0	2	copper gasket 8.2 x 12	
15	2.1011.405.2	1	nut m 8 p.1	
16	2.1474.009.2	2	spring washer 8	
17	2.0112.211.2	2	screw m 8 p.1.25 x 30	
18	2.0112.222.2	4	screw m 8 p.1.25x65	
19	2.1474.009.2	4	spring washer 8	
20	0.041.1158.0	1	index	
21	2.1310.004.2	1	flat washer 8.4x17	
22	2.0112.204.2	1	screw m 8 p.1.25x14	
23	0.048.1151.0/10	1	gasket	
24	0.048.1150.0/20	1	cover	
25	2.1560.006.0	4	gasket 10.2 x 16	
26	2.0112.315.2	4	screw m 10 p.1.5 x 40	
27	0.041.1154.0	1	gasket	
28	2.0432.015.7	1	stud bolt m 8 p.1.25-1x50	
29	2.0432.028.7	2	stud bolt m 8 p.1.25-1x130	
30	2.1653.717.0	1	pin 8 x 40	
31	0.041.1159.0/10	1	filter	
32	2.1411.012.1	1	circlip 30	
33	0.041.1135.4	1	plug 1" gas	
34	2.1569.072.0	1	gasket 32 x 39.5 x 2	
35	2.0112.004.2	2	screw m 6 p.1 x 14	
36	2.0112.235.2	1	screw m 8 p.1.25 x 130	
37	2.1011.405.2	4	nut m 8 p.1	
38	2.1310.004.2	4	flat washer 8.4x17	
39	0.037.1151.0/10	1	cover	
40	2.1579.191.2	4	spacer 8.5 x 18 x 20	1/1

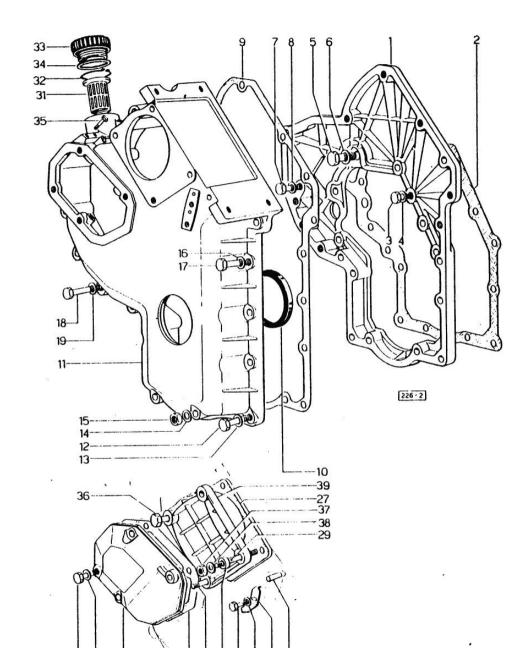

(23 28 40 22 21 20 30

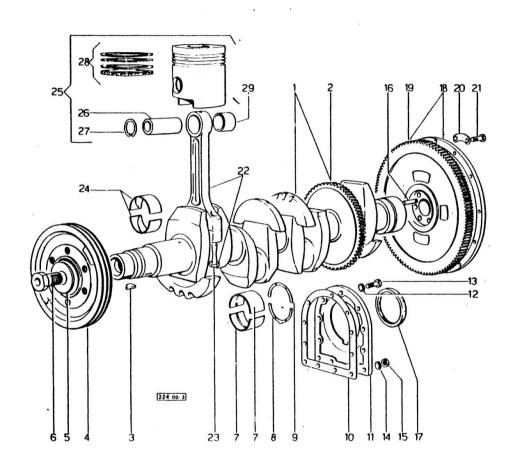

Name

QTY

Section: ENGINE


Fig.

Ref: 01.00.2

CRANKSHAFT

P/n

Notes: [CENTUR	ION 75 SPECIAL]			
1	0.044.1267.4/30	1	crankshaft	
1	2.1630.611.0	1	roll pin 6 x 24	
2	0.044.1265.0/20	1	gear	
3	2.1799.002.0	1	stick 10x13	
4	0.062.1250.0	1	pulley	
5	0.001.6020.0	1	shoulder	
6	2.0129.032.2	1	screw m 24 p.2x45	
7	0.073.0059.0	10	main half bushing - mm 1.00	
7	0.073.1215.0	10	main half bushing STANDARD	
7	0.073.1215.7	10	main half bushing - mm 0.25	
7	0.073.1215.8	10	main half bushing - mm 0.50	
7	0.073.1215.9	10	main half bushing - mm 0.75	
8	0.001.4547.0	2	shoulder ring + mm 0.05	
8	0.001.4548.0	2	shoulder ring + mm 0.10	
8	0.001.4549.0	2	shoulder ring + mm 0.15	
8	0.042.1219.0	2	shoulder ring STANDARD	
9	0.001.4544.0	2	shoulder ring + mm 0.05	
9	0.001.4545.0	2	shoulder ring + mm 0.10	
9	0.001.4546.0	2	shoulder ring + mm 0.15	
9	0.042.1218.0	2	shoulder ring STANDARD	
10	0.029.1250.0/10	1	gasket	
11	0.029.1240.0	1	flange	
12	2.1474.010.2	7	washer 10	
13	2.0112.309.2	7	screw m 10 p.1.5 x 25	
14	2.1560.006.0	2	gasket 10.2 x 16	
15	2.1011.421.2	2	nut m 10 p.1.25	
16	2.1651.915.0	2	pin 12x35	
17	2.1519.009.0/10	1	special oil seal	
18	0.039.1241.3/10	1	flywheel	
19	0.036.1242.0	1	crown wheel $Z = 126$, mm 15	
20	2.1379.006.0	3	lock-tab 15x15x36,5	
21	2.0122.515.7	6	screw	
22	0.039.1220.3/30	4	engine connecting rod	
23	0.039.1250.0	8	screw m 14 p.1.5x63	
24	0.062.0059.0	8	con.rod half bushing - mm 1.00	
24	0.062.1225.0	8	con.rod half bushing STANDARD	
24	0.062.1225.7	8	con.rod half bushing - mm 0.25	
24	0.062.1225.8	8	con.rod half bushing - mm 0.50	
24	0.062.1225.9	8	con.rod half bushing - mm 0.75	
25	0.073.0060.6	4	complete piston STANDARD	1/2
25	0.073.0061.6	4	complete piston + mm 0.50	1,2

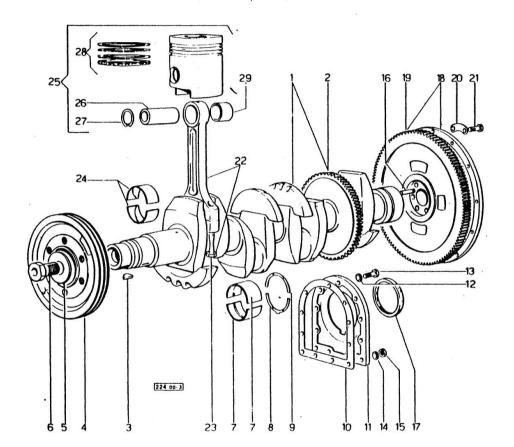

Section: ENGINE

Ref: 01.00.2


CRANKSHAFT


Fig.	P/n	QTY	Name
25	0.073.0062.6	4	complete piston + mm 1.0
26	0.038.1236.0/10	4	piston pin Ø 18 / Ø 35 / L = mm 90
27	2.1411.014.1	8	circlip 35
28	0.042.0052.6	4	piston ring set STANDARD
28	0.042.0053.6	4	piston ring set + mm 0.50
28	0.042.0054.6	4	piston ring set + mm 1.0
29	2.1559.114.0/10	4	special bushing

Section: ENGINE Ref: 01.00.3

CRANKSHAFT - HARMONIC BALANCER

Fig.	P/n	QTY	Name	
Notes:	IOM 75 CDECIALI			
ICENTUR	ION 75 SPECIAL]			
1	0.044.1263.3/20	1	mass sx/lh/li	
1	2.1559.115.0	2	special bushing 26x30x30	
2	0.044.1261.3/10	1	mass dx/rh/re	
2	2.1559.115.0	2	special bushing 26x30x30	
3	2.1589.050.0/10	4	shoulder ring 26.1x38x1	
4	0.044.1266.0/20	2	shaft	
5	0.044.1260.0/30	1	support	
6	2.1589.049.0	2	shoulder ring 12.5x26x0.3	
7	2.1579.629.0	2	spacer 12.5x26x0.1	
8	2.1579.626.0	2	spacer 13.2x16x11	
9	2.1579.628.0	1	spacer 16.5x26x0.1	
10	2.1589.048.0	1	shoulder ring 16.5x26x0.3	
11	2.1379.038.0	2	shim mm 0.1	
12	2.1379.039.0	1	shim mm 0.3	
13	2.0112.426.2	2	screw m 12 p.1.75x85	
14	2.1631.717.0	2	roll pin 8 x 40	
15	2.1310.004.2	1	flat washer 8.4x17	
15	2.1474.009.2	2	spring washer 8	
16	2.0112.204.2	3	screw m 8 p.1.25x14	
17	2.3339.515.1/10	1	pipe union m 12 p.1.25x39	
18	2.3319.041.1	1	pipe union m 12 p.1.25-p.1.75	
19	2.1560.008.0	7	gasket 12.2 x 18	
20	0.044.1562.2	1	tube	
21	2.1019.048.1	1	special nut m 12 p.1.5	
22	2.3332.003.1	1	pipe union m 12 p.1.25	
23	0.319.1550.3	1	tube	

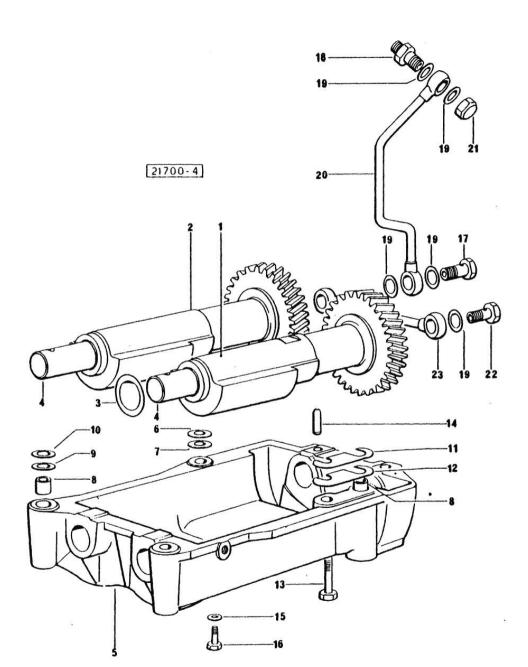

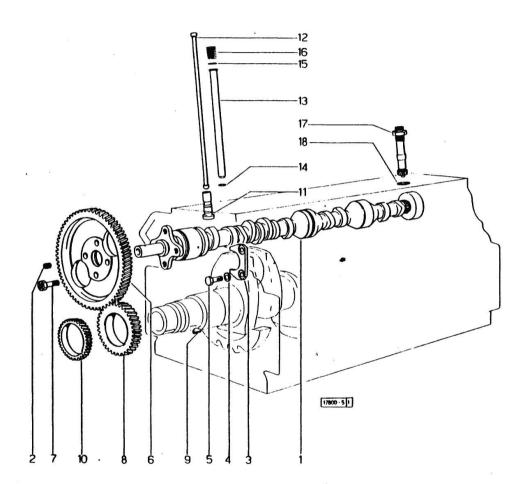

Section: ENGINE **CAMSHAFT**


Ref: 01.00.4

Fig. P/n QTY Name

Notes: ICENTURION 75 SPECIAL1

[CENTUF	RION 75 SPECIAL]			
1	0.044.1310.0/40	1	camshaft	
2	2.3130.001.1	1	plug 1/8" gas	
3	0.027.1314.0/20	1	flange	
4	2.1470.004.2	2	lock washer 8	
5	2.0112.207.2	2	screw m 8 p 1.25 x 20	
6	0.062.1321.0	1	gear z=66	
7	2.0139.005.1	4	screw m 10 p.1 x 25	
8	0.040.1320.0	1	gear z = 33	
9	2.1720.010.0	1	key 5x9	
10	0.040.1323.0/10	1	gear Z = 38	
11	0.052.1330.0/20	8	tappets	
12	0.041.1331.3	8	rod	
13	0.041.1332.0	8	sleeve	
14	2.1539.020.0	8	special oil seal 13.95x2.62	
15	2.1539.022.0	8	special oil seal 12.37x2.62	
16	2.4019.162.1/20	8	spring 17.2x46x1.8	
17	0.041.1355.3	1	transmission	
18	2.1560.014.0	1	washer 18.2 x 24	


1/1

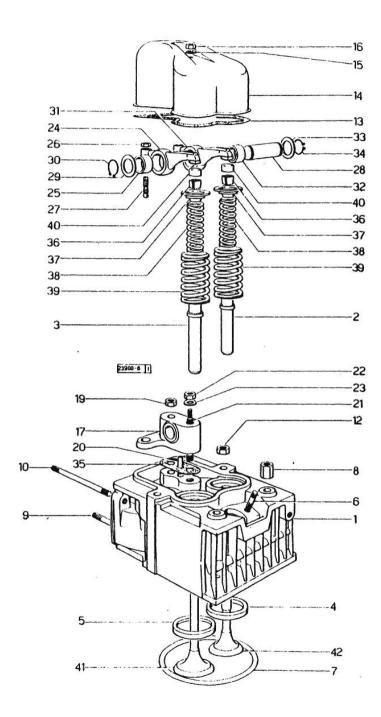

Section: ENGINE Ref: 01.00.5

CYLINDER HEAD

Notes: [CENTURION 75 SPECIAL] 0	Fig.	P/n	QTY	Name
0 0.073.0057.6 1 gasket set 1 0.044.1450.3/50 4 engine head 46315 <= 1 0.062.1410.3/10 4 engine head				
1	[CENTUR	ION 75 SPECIAL]		
1 0.062.1410.3/10 4 engine head ⇒ 46316 2 0.045.1417.0 4 valve guide 46315 <= 2 0.062.1417.0/10 4 valve guide 46315 <= 3 0.037.1416.0 4 valve guide 46315 <= 3 0.062.1416.0/10 4 valve guide 46315 <= 4 0.037.1452.0/10 4 valve seat ⇒ 46316 4 valve seat ⇒ 46316 5 <= 4 0.062.1450.0/10 4 valve seat ⇒ 46316 5 <= 4 0.062.1450.0/10 4 valve seat ⇒ 46316 6 2.0439.087.1/20 8 stud bolt m 8 p.1.25 / p.1 x 40 gasket 106x118x0.5 special nut m 12 p.1.5 special nut m 12 p.1.5 stud bolt m 8 p.1.25 / p.1 x 30 stud bolt m 12 p.1.5 stud bolt m 12	0	0.073.0057.6	1	gasket set
1	1	0.044.1450.3/50	4	č
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	1	0.062.1410.3/10	4	engine head
2	2	0.045.1417.0	4	valve guide
3	2	0.062.1417.0/10	4	valve guide
3	3	0.037.1416.0	4	valve guide
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	3	0.062.1416.0/10	4	valve guide
4 0.062.1450.0/10 4 valve seat => 46316 5 0.037.1451.0/10 4 valve seat	4	0.037.1452.0/10	4	valve seat
5	4	0.062.1450.0/10	4	valve seat
5	5	0.037.1451.0/10	4	valve seat
6 2.0439.087.1/20 8 stud bolt m 8 p.1.25 / p.1 x 40 7 2.1569.078.0/10 4 gasket 106x118x0.5 8 2.1019.037.0 5 special nut m 12 p.1.5 9 2.0432.007.2 7 stud bolt m 8 p.1.25 / p.1 x 30 10 2.0432.027.7 4 stud bolt m 8 p.1.25 - 1.00 x 120 12 2.1019.025.0 11 special nut m 12 p.1.5 13 0.029.1450.0/20 4 tappet gasket 14 0.039.1440.0 4 cap 15 2.1560.004.0 4 copper gasket 8.2 x 14 16 2.1099.056.2 4 special nut m 8 p.1 x 8 17 0.041.1430.0 4 support 19 2.1099.035.0 4 special nut m 10 p.1.25 20 0.029.1452.0 4 tube 21 0.039.1451.0 4 stud bolt 22 2.1011.421.2 4 nut m 10 p.1.25 23 2.1310.006.2 4 flat washer 10.5x21 24 0.002.5937.3/30 4 rocker arm 25 2.1559.021.0/40 4 bushing 15x19x22 26 2.1011.405.2 8 nut m 8 p.1	5	0.062.1451.0/10	4	
7	6	2 0420 097 1/20	0	
8				
9				
10				
12				
13				
14 0.039.1440.0 4 cap 15 2.1560.004.0 4 copper gasket 8.2 x 14 16 2.1099.056.2 4 special nut m 8 p.1 x 8 17 0.041.1430.0 4 support 19 2.1099.035.0 4 special nut m 10 p.1.25 20 0.029.1452.0 4 tube 21 0.039.1451.0 4 stud bolt 22 2.1011.421.2 4 nut m 10 p.1.25 23 2.1310.006.2 4 flat washer 10.5x21 24 0.002.5937.3/30 4 rocker arm 25 2.1559.021.0/40 4 bushing 15x19x22 26 2.1011.405.2 8 nut m 8 p.1				
15				
16 2.1099.056.2 4 special nut m 8 p.1 x 8 17 0.041.1430.0 4 support 19 2.1099.035.0 4 special nut m 10 p.1.25 20 0.029.1452.0 4 tube 21 0.039.1451.0 4 stud bolt 22 2.1011.421.2 4 nut m 10 p.1.25 23 2.1310.006.2 4 flat washer 10.5x21 24 0.002.5937.3/30 4 rocker arm 25 2.1559.021.0/40 4 bushing 15x19x22 26 2.1011.405.2 8 nut m 8 p.1				
17 0.041.1430.0 4 support 19 2.1099.035.0 4 special nut m 10 p.1.25 20 0.029.1452.0 4 tube 21 0.039.1451.0 4 stud bolt 22 2.1011.421.2 4 nut m 10 p.1.25 23 2.1310.006.2 4 flat washer 10.5x21 24 0.002.5937.3/30 4 rocker arm 25 2.1559.021.0/40 4 bushing 15x19x22 26 2.1011.405.2 8 nut m 8 p.1				
19				-
20				
21 0.039.1451.0 4 stud bolt 22 2.1011.421.2 4 nut m 10 p.1.25 23 2.1310.006.2 4 flat washer 10.5x21 24 0.002.5937.3/30 4 rocker arm 25 2.1559.021.0/40 4 bushing 15x19x22 26 2.1011.405.2 8 nut m 8 p.1				•
22 2.1011.421.2 4 nut m 10 p.1.25 23 2.1310.006.2 4 flat washer 10.5x21 24 0.002.5937.3/30 4 rocker arm 25 2.1559.021.0/40 4 bushing 15x19x22 26 2.1011.405.2 8 nut m 8 p.1				
23				
24 0.002.5937.3/30 4 rocker arm 25 2.1559.021.0/40 4 bushing 15x19x22 26 2.1011.405.2 8 nut m 8 p.1				-
25 2.1559.021.0/40 4 bushing 15x19x22 26 2.1011.405.2 8 nut m 8 p.1				
26 2.1011.405.2 8 nut m 8 p.1				
1/2				=
27 0.021.1434.0 8 screw				<u>.</u>
	27	0.021.1434.0	8	

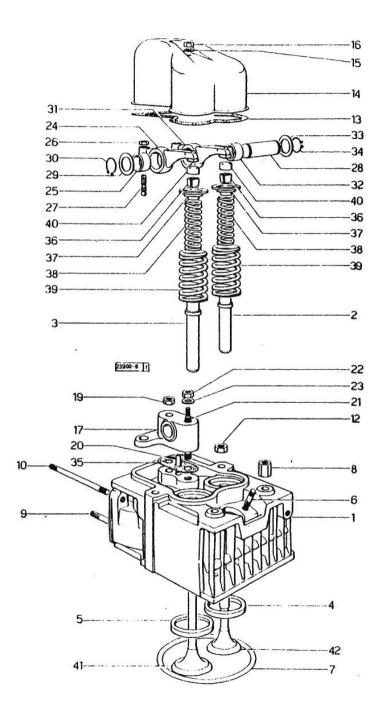


Section: ENGINE

Ref: 01.00.5

CYLINDER HEAD

Fig.	P/n	QTY	Name
28	0.041.1431.0	4	pin
29	2.1599.019.0	4	shoulder ring 19.5x31x2
30	2.1410.055.7	4	circlip 19
31	0.002.5936.3/40	4	rocker arm
32	2.1559.021.0/40	4	bushing 15x19x22
33	2.1559.021.0/40	4	
34			special bushing
3 4 35	2.1410.055.7	4	circlip 19
	0.034.1450.0	4	tappet gasket
36	0.062.1423.0/10	16	conical valve cotter
26	0.074.1422.0	1.6	=> 46316
36	0.074.1423.0	16	conical valve cotter
27	0.000.0015.0/00	0	46315 <=
37	0.002.9215.0/20	8	cup
	0.040.440.50		46315 <=
37	0.062.1425.0	8	cup
			=> 46316
38	2.4019.194.0	8	spring 22.70x50.7x2.1
39	2.4019.193.0	8	spring 36.15x55.2x3.2
40	0.021.1453.0/20	8	small cover
			46315 <=
40	0.062.1452.0	8	small cover
			=> 46316
41	0.042.1420.2	4	inlet valve Ø mm 8
			=> 6316
41	0.052.1420.0	4	inlet valve Ø mm 9
			6315 <=
42	0.039.1421.0	4	exhaust valve Ø mm 9
			6315 <=
42	0.071.1420.2	4	exhaust valve Ø mm 8
			=> 6316

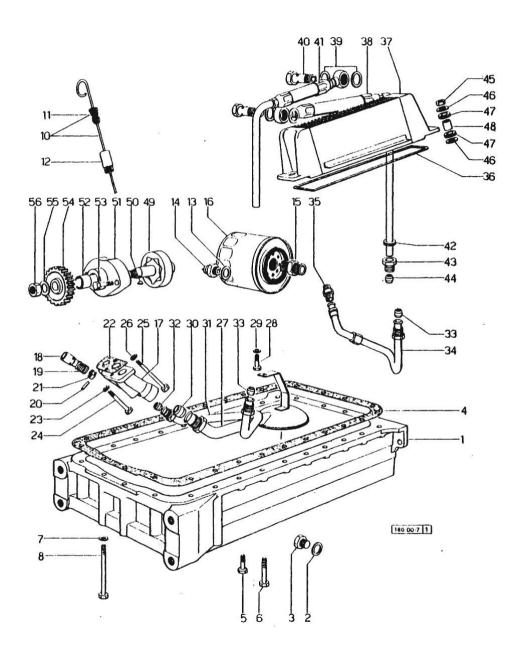

Section: ENGINE

Ref: 01.00.6

LUBRICATION

Fig.	P/n	QTY	Name	
Notes:				
[CENTURI	ION 75 SPECIAL]			
1	0.045.1510.0	1	oil sump	
2	2.1560.054.0	1	gasket 21 x 26	
3	2.3199.001.2	1	plug 1/2" gas	
4	0.036.1512.0	1	gasket	
5	2.0112.211.2	2	screw m 8 p.1.25 x 30	
6	2.0112.224.2	18	screw m 8 p.1.25x75	
6	2.0112.229.2	2	screw m 8 p.1.25 x 100	
7	2.1560.004.2	4	gasket	
8	2.0112.217.2	2	screw m 8 p.1.25 x 45	
8	2.0112.231.2	2	screw m 8 p.1.25 x 110	
8	2.0112.235.2	2	screw m 8 p.1.25 x 130	
10	0.045.1513.3	1	dipstick	
11	0.034.1551.0	1	gasket	
12	0.044.1555.0	1	spacer	
13	2.1560.008.0	1	gasket 12.2 x 18	
14	2.7099.460.0	1	pressure switch	
15	2.3339.094.1/10	1	pipe fitting m 20 p.1.5-3/4 gas	
16	0.044.1567.0	1	oil filter element	
17	0.052.1530.0	1	tip 42085 <=	
18	0.040.1550.0	1	small piston	
			42085 <=	
18	0.052.1571.0	1	small piston	
			=> 42086	
19	2.4019.241.1	1	spring	
			42085 <=	
19	2.4019.270.1	1	spring 9.7x54x2 => 42086	
20	2.1690.314.2	1	split pin 3.2x40	
21	0.040.1551.0	1	stop	
	0.010.1221.0	•	42085 <=	
21	0.054.1558.0/20	1	stop	
	0.02 1.122 0.0/20	•	=> 42086	
22	0.037.1557.0/20	1	gasket	
23	2.1474.009.2	1	spring washer 8	
24	2.0112.225.2	1	screw m 8 p.1.25 x 80	
25	2.0112.231.2	1	screw m 8 p.1.25 x 110	
26	2.1474.009.2	1	spring washer 8	
27	0.044.1556.3/10	1	tube	
•				
28	2.0112.204.2	1	screw m 8 p.1.25x14	1/2

Thank you so much for reading.

Please click the "Buy Now!"

button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email: ebooklibonline@outlook.com