
Section: ENGINE Ref: 01.00.3

CRANKCASE

Fig.	P/n	QTY	Name
N-4			
Notes: [LASER 150	01		
[E/IDE/I 15	٥]		
1	0.007.1102.6/20	1	crankcase
1.1	2.3130.001.1	14	plug 1/8" gas
1.2	2.3130.002.1	2	plug 1/4" gas
1.3	2.3130.003.1	8	plug 3/8" gas
1.4	2.3179.012.0	1	plug 60
1.5	0.000.0000.1		cannot be supplied
1.5.1	0.065.1112.7	1	support
1.5.1.2	2.1699.165.0	1	bush 12.3x15x16
1.5.2	0.065.1114.0/10	5	support
1.5.3	0.007.0848.3/10	1	support
1.5.3.2	2.1699.165.0	1	bush 12.3x15x16
1.5.4	0.065.1117.0	14	screw m 12 x 100
1.5.6	0.065.1140.0	6	special bushing 59X55X20
1.5.7	0.065.1141.0	1	special bushing 59X55X30
1.5.8	0.066.1151.0	1	pin
2	0.066.1152.0/10	4	gasket
3	2.1532.072.0	1	oil seal 26.70x1.78
4	2.3199.405.2	1	plug m 28 p.1.5
5	2.0432.003.7	18	stud bolt m 8 p.1.25 / p.1 x 20
6	2.1559.188.2	6	bush 11.4 x 14 x16
7	2.1539.193.0	12	special oil seal 107.62x2.62
10	2.1560.010.0	1	gasket 14.2 x 20
11	2.3199.292.0	1	plug 1/4" gas
13	2.1549.154.2	6	bush 4.8x5.8x16
14	2.3120.101.0	1	plug m 18 p.1.5
15	2.1560.014.0	1	washer 18.2 x 24

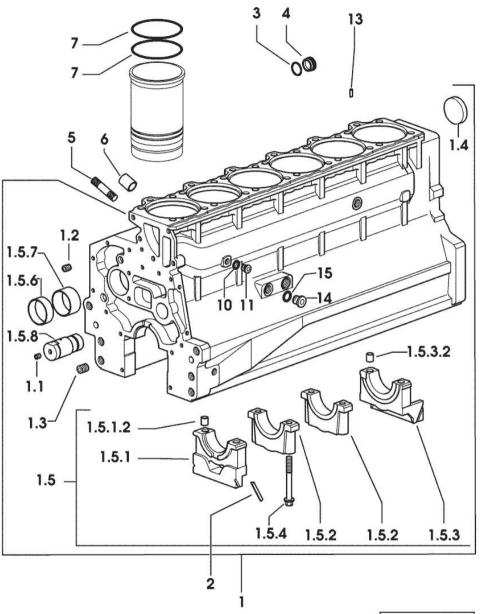


9\_01311\_00\_0\_0


Section: ENGINE Ref: 01.00.8

#### MONOBLOC ENGINE-GEARBOX CONNECTING FLANGE

Fig.	P/n	QTY	Name	
<b>Notes:</b> [LASER 15	50]			
1	2.3131.003.2	1	plug m 16 p.1.5	
2	2.0112.534.2	2	screw m 14 p.2x125	
3	2.1310.009.2	2	flat washer 15x20	
6	2.0439.250.7	1	stud bolt m 12 / m 10 x 30	
7	0.011.9294.0/10	1	bush	
8	0.007.0809.0/20	1	flange	
9	2.0112.513.2	11	screw m 14 p.2 x 35	
10	2.0432.328.7	4	stud bolt m 14 p.2-1.5x130	
12	2.0112.531.2	2	screw m 14 p.2x110	
13	2.1651.911.0	2	cylindrical plug	
14	2.1011.108.2	6	nut m 14 p.2	
15	2.0432.257.7	1	stud bolt m 12 p.1.75 - 1.25 x 30	
16	2.0312.520.2	2	screw m 14 p.2x70	

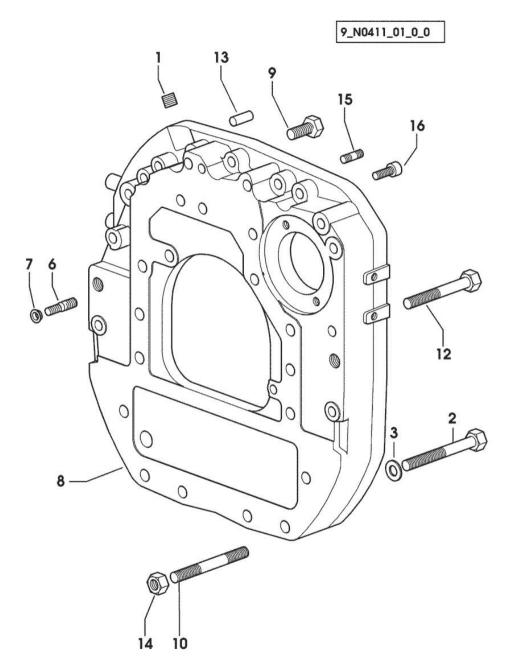

9\_33611\_01\_0\_0

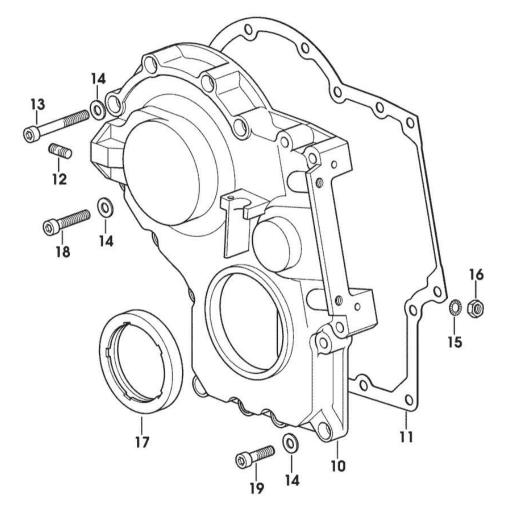


#### LASER 150 -> 6001

Section: ENGINE

TIMING CASE

Ref: 01.00.9

Fig.	P/n	QTY	Name	
<b>Notes:</b> [LASER 15	50]			
10	0.013.4981.0	1	guard	
11	0.065.1150.0/30	1	gasket	
12	2.0432.003.7	2	stud bolt m 8 p.1.25 / p.1 x 20	
13	2.0312.219.2	4	screw m 8 p.1.25x65	
14	2.1480.014.1	15	washer 8	
15	2.1470.004.2	4	lock washer 8	
16	2.1011.405.2	2	nut m 8 p.1	
17	2.1529.141.0	1	special oil seal	
18	2.0312.214.2	3	screw m 8 p.1.25 x 40	
19	2.0312.208.2	8	screw m 8 p.1.25 x 25	

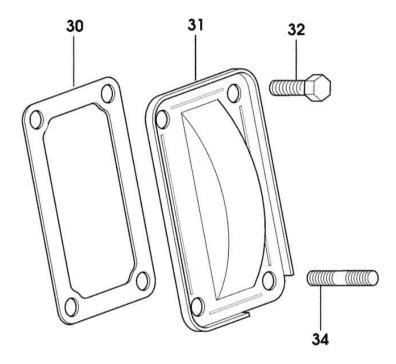

9\_33011\_04\_0\_0

## LASER 150 -> 6001

Section: ENGINE

Ref: 01.00.14

# **CASING COVER**


Fig.	P/n	QTY	Name
Notes: [LASER 150]			
30	0.065.1152.0	1	gasket
31	0.065.1151.0	1	cover
32	2.0112.205.2	2	screw m 8 p.1.25 x 16
34	2.0432.005.7	2	stud bolt m 8 p.1.5 / p.1 x 25

Section: ENGINE

Ref: 01.00.15

# **GUARD PLATE**

Fig.	P/n	QTY	Name	
Notes: [LASER 150]				
1	0.007.1262.3/50	1	guard	
2	0.007.1271.0/10	1	small column m $8 \text{ p.1.25 / L} = \text{mm } 60$	
3	0.007.1272.0/10	2	small column m $8 \text{ p.1.25 / L} = \text{mm } 50$	
5	2.1310.004.2	3	flat washer 8.4x17	
7	2.0112.203.2	3	screw m 8 p.1.25 x 12	

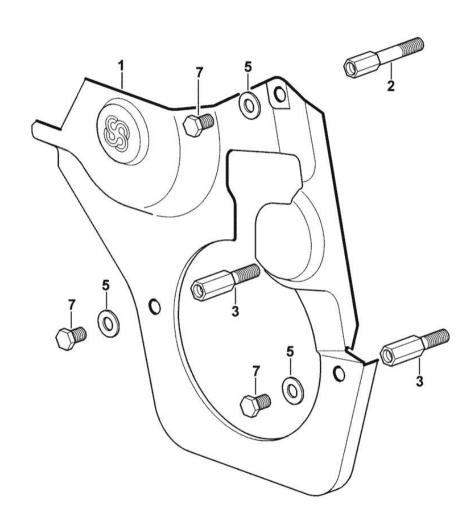


9\_33011\_02\_0\_0


Section: ENGINE

Ref: 01.00.20

# CRANKSHAFT

Fig.	P/n	QTY	Name	
	'			
Notes:				
[LASER 15	00]			
2	2.1651.915.0	1	pin 12x35	
3	0.065.1215.0	7	main half bushing STANDARD	
3	0.065.1215.7		main half bushing - mm 0.25	
3	0.065.1215.8		main half bushing - mm 0.50	
4	0.065.1216.0	7	main half bushing	
4	0.065.1216.7		main half bushing - mm 0.25	
4	0.065.1216.8		main half bushing - mm 0.50	
5	0.065.1218.0	4	shim STANDARD	
5	0.065.1218.7		$shim + mm \ 0.10$	
5	0.065.1218.8		$shim + mm \ 0.15$	
6	2.1599.524.7	1	washer 21x60x12	
7	2.1720.006.0	1	key 4x6.5	
9	0.065.1254.0/20	1	gasket	
10	0.007.0851.0/10	1	cover	
11	2.1529.073.0	1	special oil seal 110x130x13	
12	2.1475.002.2	9	conical washer 8	
13	2.0112.207.2	7	screw m 8 p 1.25 x 20	
14	2.3130.001.1	6	plug 1/8" gas	
15	2.1589.137.0	2	shoulder ring 71x110x1	
16	2.0432.003.7	2	stud bolt m 8 p.1.25 / p.1 x 20	
17	2.1011.105.2	2	nut m 8 p.1.25	
20	0.009.3704.3	1	antivibration pulley	
21	0.010.4320.3/20	1	crankshaft	
21.2	0.007.0855.0/10	1	gear	
22	0.011.2206.0/20	1	hub	
23	2.0399.144.7/10	1	screw m 20 p.1.5x51	

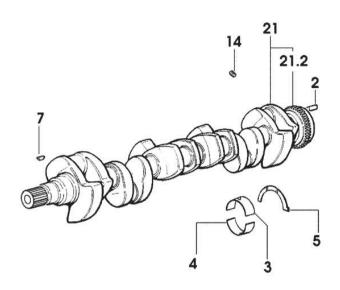

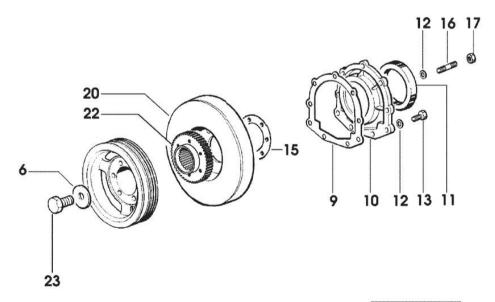



9\_37912\_00\_0\_0

Section: ENGINE Ref: 01.00.26

#### CYLINDER - PISTON - CONNECTING ROD

Fig.	P/n	QTY	Name
Notes: [LASER 150	1		
1	0.384.0065.A	6	cyl. piston assembly "A" - CLASS A
1	0.384.0065.B	6	cyl. piston assembly "B" - CLASS B
1.1	0.A12.2675.0	1	engine cylinder "A" - CLASS A
1.1	0.B12.2675.0	1	engine cylinder "B" - CLASS B
1.2	0.383.0060.A	1	complete piston "A" - CLASS A
1.2	0.383.0060.B	1	complete piston "B" - CLASS B
1.2.1	0.338.0052.6/20	1	piston ring set
1.2.2	2.1411.014.1	2	circlip 35
1.2.3	0.078.1236.0	1	piston pin Ø $18 / Ø 35 / L = mm 86$
2	0.065.1225.0	12	con.rod half bushing STANDARD - $A = 28.75 -> 29.00$
2	0.065.1225.7	12	con.rod half bushing - mm 0.25
2	0.065.1225.8	12	con.rod half bushing - mm 0.50
3	0.078.1220.3/30	6	engine connecting rod
3.1	2.0399.213.0	2	screw m 12 p.1.25x61.5
3.2	2.1559.114.0/10	1	special bushing

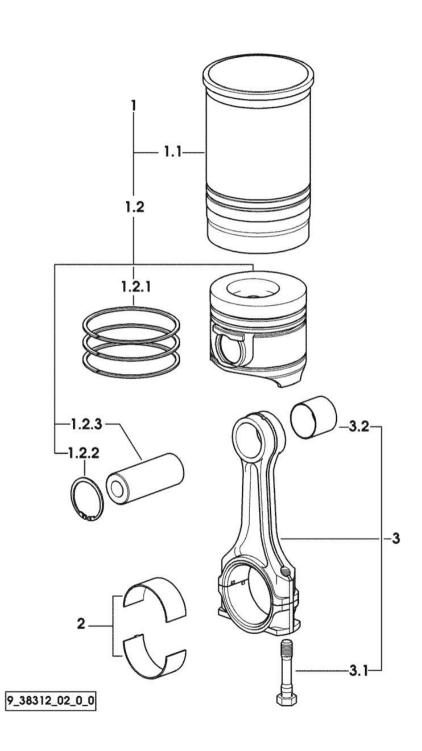

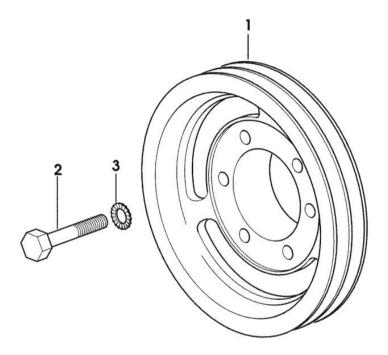

9\_33712\_01\_0\_0


#### LASER 150 -> 6001

Section: ENGINE Ref: 01.00.27

## CRANKSHAFT PULLEY

Fig.	P/n	QTY	Name
Notes: [LASER 150]			
1	0.007.0962.0/30	1	pulley
2	2.0112.322.2	6	screw m 10 p.1.5x65
3	2.1470.006.2	6	lock washer 10

# 9\_N0412\_01\_0\_0

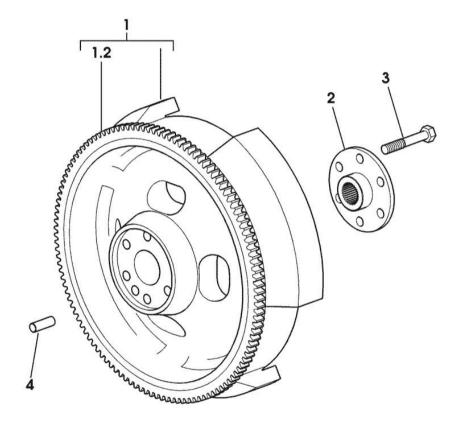

## LASER 150 -> 6001

Section: ENGINE Ref: 01.00.32

# ENGINE FLYWHEEL

Fig.	P/n	QTY	Name
Notes: [LASER 150]			
1	0.078.1241.3	1	flywheel
1.2	0.065.1242.0	1	crown wheel $Z = 123$
2	0.288.3625.0	1	flange
3	2.0139.023.2	6	screw
4	2.1651.915.0	1	pin 12x35

Name

QTY


Section: ENGINE **CAMSHAFT** 

P/n

Ref: 01.00.38




Notes: [LASER 150]			
1	0.065.1331.2	12	rod
2	2.1569.114.0/10	24	gasket 14x18.5x8
3	0.065.1332.0	12	sleeve
4	2.4019.300.1/10	12	spring 18.5x52x2
5	2.1599.437.0	12	shoulder ring
6	0.065.1330.0	12	tappets
7	0.065.1354.0/20	1	gear z=58
8	2.0132.207.2	4	screw m 10 p.1 x 25
9	0.075.1310.3/30	1	camshaft
9.1	0.065.1324.0/10	1	gear Z = 32
10	0.065.1350.0	1	small disc
11	2.1410.016.1	1	circlip 40
12	0.065.1352.0	1	shim
13	0.065.1351.0	2	shoulder ring
14	0.007.1188.0/30	1	gear Z = 29
16	2.0312.205.2	2	screw
17	2.1480.014.1	2	washer 8
18	0.065.1353.0	1	small plate
19	0.007.1177.3/20		gear z = 57 - WITH RED IDENTIFICATION STAMP
19.2	2.1559.185.0/10	1	bushing
20	0.007.1178.3/20	-	gear z = 57
	0.00771170.0720		- WITH YELLOW IDENTIFICATION STAMP
20.2	2.1559.185.0/10	1	bushing
21	0.007.1179.3/20	1	gear z = 57 - WITH GREEN IDENTIFICATION STAMP
21.2	2.1559.185.0/10	1	bushing
22	2.1559.398.0	1	bushing 10.5x13x12

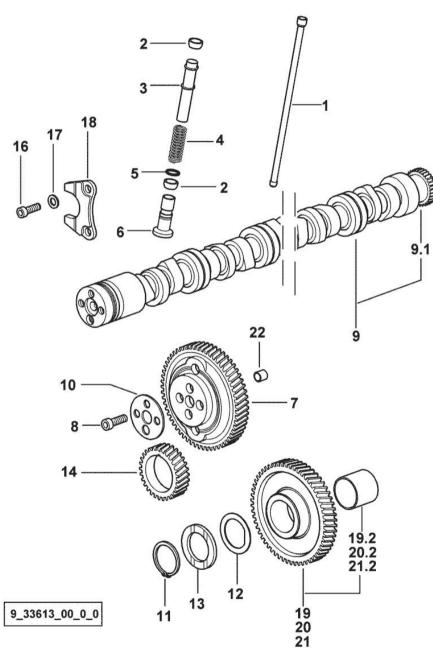

Ref: 01.00.39

# Section: ENGINE **CYLINDER HEAD**

31 33 36 30	CVI IND	ER HEAD		Ref. 01.00.39
31 33	Fig.	P/n	QTY	Name
31.3	<del>8</del> -		<u> </u>	
31.3	Notes:			
	[LASER 150	]		
0-0				
	1	0.007.1360.3/60	6	head
	1.2	0.078.1426.0	1	valve seat
10.10 3 10.10 35 32	1.3	0.066.1427.0	1	valve seat
	1.4	0.007.1779.0/10	2	valve guide
10.2 10.10.4	1.5	0.010.6041.0	1	bush
15 10.10.4.2	1.6	2.3170.012.1	2	expansion plug 30
	2	2.0432.011.7	6	stud bolt m 8 p.1.25 / p.1 x 40
7 3 10.10.3 -10	3	2.0432.005.7	6	stud bolt m 8 p.1.5 / p.1 x 25
10.10.6 — 10.10.6.2 — 10.10.7	6	0.074.1423.0	24	conical valve cotter
10.1-	7	0.066.1425.0	12	cup
19~	8	2.4019.287.0	12	spring
	9	0.012.2673.0	24	screw m 14 p.2x141
0 9 7	10	0.000.0000.1		cannot be supplied
	10.1	0.066.1431.0	1	pin
	10.2	0.021.1434.0	2	screw
	10.10	0.000.0000.1	_	cannot be supplied
	10.10.3	2.1011.405.2	2	nut m 8 p.1
	10.10.4	0.066.1432.3	2	rocker arm
-1.5     \       -8	10.10.4.2	2.1559.021.0/40	1	bushing 15x19x22
14 37	10.10.5	2.1410.055.7	2	circlip 19
	10.10.6	0.000.0000.1		cannot be supplied
9	10.10.6.2	0.066.1430.0/10	1	support
	10.10.7	2.1599.432.0	2	shoulder ring
	14	2.0432.163.7	6	stud bolt m 10 p.1.5 / p.1.25 x 45
	15	2.1011.421.2	12	nut m 10 p.1.25
The state of the s	18	2.0432.161.7	6	stud bolt m 10 p.1.5 / p.1.25 x 40
	19	2.1530.051.0	6	oil seal 20.22x3.53
	20	0.078.1451.0/40		head gasket -A-
	21	0.078.1452.0/30		head gasket -B-
	22	0.078.1453.0/40		head gasket -C-
	30	0.078.1450.3/10	1	cover
	31	0.078.1440.3/10	1	cover
	31.3	2.3171.008.4	1	plug 20
	32	0.009.3877.0/10	2	tappet gasket
	33	2.0399.288.2/10	6	screw m 8x36x46
—20 - 21 - 22	34	2.1539.151.0	6	special oil seal 9.19 x 2.62
	35	2.6859.091.0	2	clamp
0.0434.00.00	36	0.075.1452.0/10	1	sleeve
9_34114_00_0_0	J 37	2.1519.117.0	12	special oil seal



9\_34014\_01\_0\_0


## LASER 150 -> 6001

Section: ENGINE Ref: 01.00.45

# INLET AND EXHAUST VALVES

Fig.	P/n	QTY	Name
Notes: [LASER 150]			
1 2	0.007.1147.0/10 0.007.1146.0/10	6 6	exhaust valve mm 39.1 / Ø mm 9 inlet valve mm 43.63 / Ø mm 9


1/1




Section: ENGINE Ref: 01.00.56

# OIL PAN

Fig.	P/n	QTY	Name	
Notes: [LASER 150	D]			
14	0.007.0638.2	6	sprayers	
15	2.1099.108.2	6	special nut m 10 p.1	
16	2.1560.006.0	12	gasket 10.2 x 16	
17	2.3249.022.2	6	pipe fitting m 10 p.1	
18	2.1470.004.2	34	lock washer 8	
20	2.0112.215.2	25	screw m 8 p.1.25 x 40	
21	0.007.1311.0/10	1	oil sump	
22	2.0112.229.2	3	screw m 8 p.1.25 x 100	
23	2.0112.235.2	2	screw m 8 p.1.25 x 130	
24	2.0112.241.2	4	screw m 8 p.1.25 x 160	



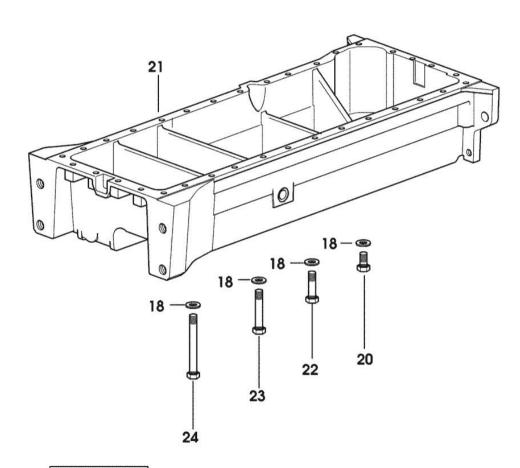


9\_34015\_01\_0\_0

Section: ENGINE Ref: 01.00.57

# OIL PUMP

Fig.	P/n	QTY	Name
NT 4			
Notes: [LASER 15	01		
[LABLK 13	vj		
1	2.0312.205.2	2	screw
2	2.1480.014.1	2	washer 8
3	0.041.1135.4	1	plug 1" gas
3.2	2.1569.072.0	1	gasket 32 x 39.5 x 2
4	0.065.1565.0/10	1	pipe union
5	0.065.1567.0/10	1	filter
6	2.1539.042.0	1	special oil seal 47.35x1.78
7	0.010.9103.2	1	dipstick
8	2.1539.065.0	2	special oil seal 8.73 x 1.78
9	2.3199.001.2	2	plug 1/2" gas
10	2.1560.054.0	2	gasket 21 x 26
11	0.007.0849.0/10	1	gasket
12	0.011.0087.4	1	tube
15	2.0112.205.2	1	screw m 8 p.1.25 x 16
16	2.1470.004.2	1	lock washer 8
17	2.1539.153.0	1	oil seal 32.99x2.6
18	2.3339.307.0	2	pipe fitting m 22 p.1.5-3/4"
19	2.0112.320.2	2	screw m 10 p.1.5 x 55
20	0.010.0194.4/30	1	oil pump
			COMPONENT PARTS SEE COMPONENTS LIST
			© 0.010.0194.4/30
21	0.007.0972.0	5	shim
22	0.007.0973.0	5	shim
23	0.007.0867.0	1	bush
40	2.1310.006.2	3	flat washer 10.5x21
42	2.0112.322.2	1	screw m 10 p.1.5x65

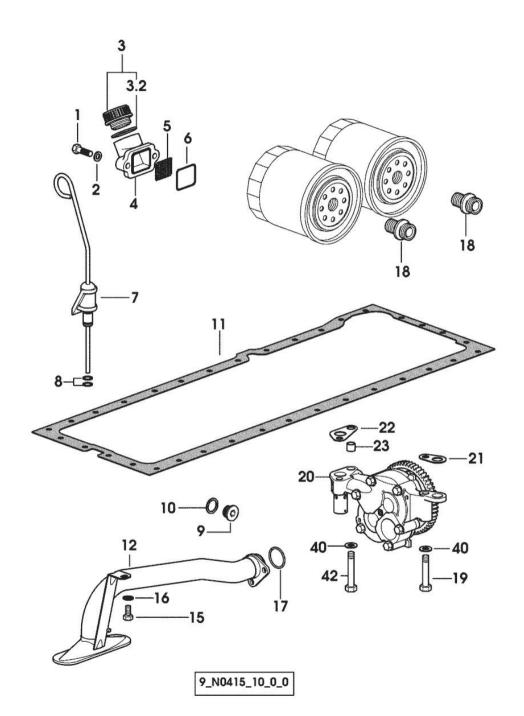


Section: ENGINE LUBRICATION

Ref: 01.00.62



Fig.	P/n	QTY	Name
Notes:			
[LASER 1:	50]		
	-		
24	2.6859.086.0	2	clamp
25	0.075.1557.4	1	sediment bowl
25.1	2.0351.203.6	4	screw 3.5x9.5
25.2	0.000.0000.1		cannot be supplied
25.3	0.075.1559.0	1	gasket
25.4	0.000.0000.1		cannot be supplied
26	2.1560.008.0	1	gasket 12.2 x 18
27	2.1539.072.0	2	special oil seal 23.52 x 1.78
28	0.075.1553.0	1	bush
30	0.007.0861.0	1	tube
31	0.007.0970.0	1	tube
32	2.3339.418.1	1	pipe fitting m 12 p.1
33	2.3350.003.1	1	nosepiece 8
34	2.0312.221.2	2	screw m 8 p.1.25x75
35	2.1480.014.1	2	washer 8
36	2.1011.103.2	1	nut m 6 p.1
37	0.002.8816.0	1	small plate
38	2.1310.002.2	1	flat washer 6.4x12.5
39	2.0112.007.2	1	screw m 6 p.1 x 20
41	0.075.1453.0/10	1	tube

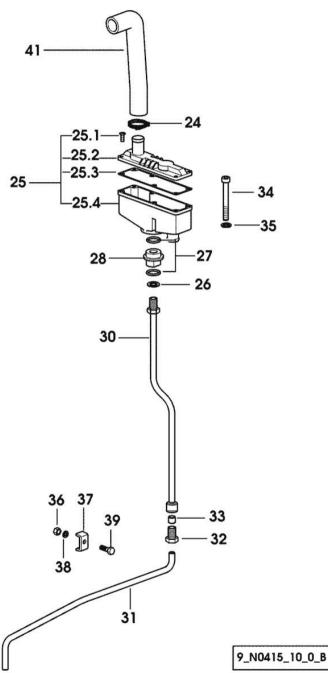

Thank you so much for reading. Please click the "Buy Now!" button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email: ebooklibonline@outlook.com