


Section: ENGINE

CRANKCASE

Ref: 01.00.0


Fig.	P/n	QTY	Name	
Notes:				
[MERCUR	RY 85 SPECIAL]			
0	0.044.0050.6	1	gasket set	
			FOR ENGINE ASSEMBLY	
1	0.045.1110.4	1	crankcase	
2	0.037.1155.0	1	bushing	
3	2.1559.111.0/10	2	special bushing 11.5x14.1x10	
4	2.1599.144.7	10	shoulder ring 12.5x23x4	
5	0.004.8774.3	1	support	
6	2.1559.090.0/10	1	bushing 14.24x19.06x27	
7	0.037.1114.0	1	support	
8	0.029.1113.0	2	support	
9	0.029.1116.0	1	support	
10	0.021.1157.0	4	stud bolt	
11	2.1019.026.7	10	special nut m 12 p.1.5	
12	0.029.1117.0	6	stud bolt	
13	0.029.1154.0	4	gasket	
14	2.1699.114.0	1	pin 8x55	
15	2.1653.711.0	1	pin	
16	2.0432.025.1	2	stud bolt m 8 p 1.25-1x100	
17	0.044.1130.0	1	flange	
18	2.1653.708.0	2	pin 8x18	
19	2.1652.911.0	2	cylindrical plug 12x25	
20	2.0432.153.1	2	stud bolt m 10 p.1.5 / p.1.25 x 20	
21	2.0112.511.1	11	screw m 14 p.2 x 30	
22	2.0432.257.1	2	stud bolt m 12 p.1.75 - 1.25 x 30	
23	2.3170.022.1	1	expansion plug 60	
24	2.3130.003.1	2	plug 3/8" gas	
25	2.3130.002.1	1	plug 1/4" gas	
26	0.044.1120.0/10	4	engine cylinder	
27	2.1589.052.0	8	shoulder ring 115x123x0.2	
28	2.1589.051.0	4	shoulder ring 116x123x0.1	
29	2.1569.076.0	4	gasket 116x123x0.5	
30	0.041.1123.0	4	stud bolt m 10	
31	0.039.1122.0	16	stud bolt m 12 p.1.5x310	
32	0.044.1156.0	8	special bushing	
33	0.071.1151.3	4	valve	
34	2.3130.001.1	4	plug 1/8" gas	
35	2.1653.507.0	2	pin	
36	2.3139.001.1	5	plug	
37	2.0432.003.1	4	stud bolt m 8 p.1.25 / p.1 x 20	
38	0.044.1151.0	1	gasket	1/2
<b>3</b> 9	0.044.1164.2/10	1	small cover	1/2

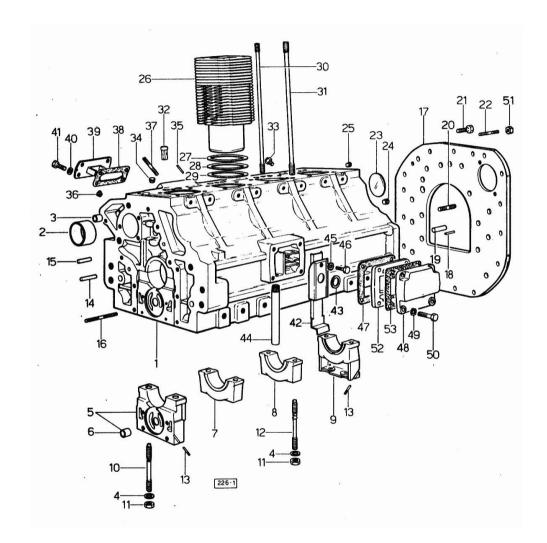

Section: ENGINE CRANKCASE

Ref: 01.00.0

Fig.	P/n	QTY	Name	
40	2.1310.004.2	4	flat washer 8.4x17	
41	2.0112.204.2	2	screw m 8 p.1.25x14	
41	2.0119.116.2	2	screw m 8 p.1.25x14	
42	0.044.1162.2	1	small guard	
43	0.045.1150.0	1	oil seal	
44	0.044.1152.0	1	tube	
45	2.1474.009.1	1	spring washer 8	
46	2.0312.206.2	1	screw m 8 p 1.25 x 20	
47	0.044.1153.0/10	1	gasket	
48	0.044.1163.0	1	cover	
49	2.1474.009.1	4	spring washer 8	
50	2.0112.211.2	4	screw m 8 p.1.25 x 30	
51	2.1011.207.2	2	nut m 12 p.1.5	
52	0.044.1160.0/10	1	container	
53	0.044.1161.0	1	gasket	

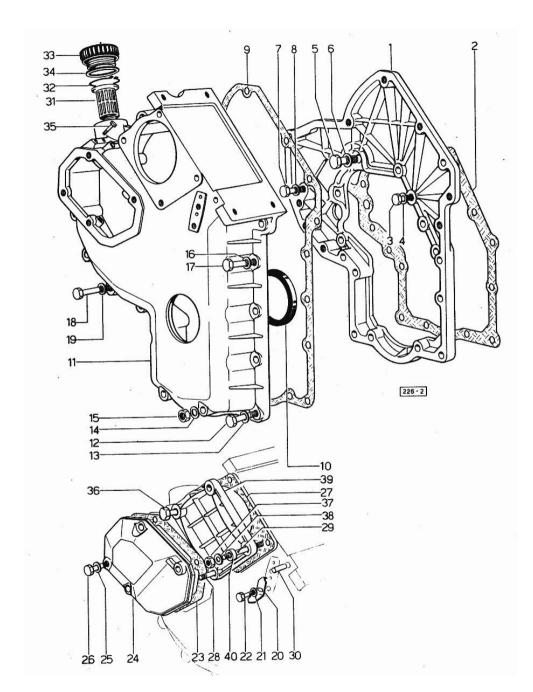


Section: ENGINE

Ref: 01.00.1

TIMING CASE

Fig.	P/n	QTY	Name	
Notes:				
	RY 85 SPECIAL]			
[				
1	0.048.1131.0	1	flange	
2	0.041.1153.0	1	gasket	
3	2.0112.211.2	3	screw m 8 p.1.25 x 30	
4	2.1474.009.1	5	spring washer 8	
5	2.0119.034.1	1	screw m 14 p.2x20	
6	2.1560.010.0	1	gasket 14.2 x 20	
7	2.0112.207.2	1	screw m 8 p 1.25 x 20	
8	2.1474.009.1	1	spring washer 8	
9	0.041.1152.0	1	gasket	
10	2.1519.010.0	1	special oil seal 58x80x10	
11	0.048.1132.0/30	1	guard	
12	2.0112.217.2	5	screw m 8 p.1.25 x 45	
13	2.1474.009.1	5	spring washer 8	
14	2.1560.003.0	2	copper gasket 8.2 x 12	
15	2.1011.405.2	1	nut m 8 p.1	
16	2.1474.009.1	2	spring washer 8	
17	2.0112.211.2	2	screw m 8 p.1.25 x 30	
18	2.0112.222.2	4	screw m 8 p.1.25x65	
19	2.1474.009.1	4	spring washer 8	
20	0.041.1158.0	1	index	
21	2.1310.004.2	1	flat washer 8.4x17	
22	2.0112.204.2	1	screw m 8 p.1.25x14	
23	0.048.1151.0/10	1	gasket	
24	0.048.1150.0/20	1	cover	
25	2.1560.006.0	4	gasket 10.2 x 16	
26	2.0112.315.2	4	screw m 10 p.1.5 x 40	
27	0.041.1154.0	1	gasket	
28	2.0432.015.1	1	stud bolt m 8 p 1.25 - m 8 p. 1x50	
29	2.0432.028.1	2	stud bolt m 8 p.1.25-1x130	
30	2.1653.717.0	1	pin 8 x 40	
31	0.041.1159.0/10	1	filter	
32	2.1411.012.1	1	circlip 30	
33	0.041.1135.3	1	plug	
34	2.1569.072.0	1	gasket 32 x 39.5 x 2	
35	2.0119.081.2	2	screw	
36	2.0112.235.2	1	screw m 8 p.1.25 x 130	
37	2.1011.505.2	4	nut m 8 p.1	
38	2.1310.004.2	4	flat washer 8.4x17	
39	0.037.1151.0	1	cover	
40	2.1579.191.0	4	spacer 8.5 x 18 x 20	1/1

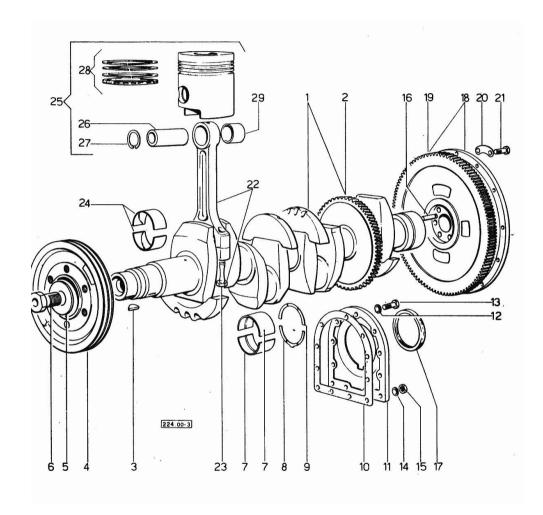

Section: ENGINE

Ref: 01.00.2


#### **CRANKSHAFT**

25

0.046.0061.6/10

Fig.	P/n	QTY	Name	
Notes:				
	RY 85 SPECIAL]			
	•			
1	0.044.1267.4/20	1	crankshaft	
1	2.1630.611.0	1	roll pin 6 x 24	
2	0.044.1265.0/10	1	gear	
3	2.1799.002.0	1	stick 10x13	
4	0.062.1250.0	1	pulley	
5	0.001.6020.0	1	shoulder	
6	2.0129.032.2	1	screw m 24 p.2x45	
7	0.029.0066.0		main half bushing - mm 1.00	
7	0.029.1215.0/10	10	main half bushing	
7	0.029.1215.7		main half bushing - mm 0.25	
7	0.029.1215.8		main half bushing - mm 0.50	
7	0.029.1215.9		main half bushing - mm 0.75	
8	0.001.4547.0		shoulder ring + mm 0.05	
8	0.001.4548.0		shoulder ring + mm 0.10	
8	0.001.4549.0		shoulder ring + mm 0.15	
8	0.042.1219.0	2	shoulder ring STANDARD	
9	0.001.4544.0		shoulder ring + mm 0.05	
9	0.001.4545.0		shoulder ring + mm 0.10	
9	0.001.4546.0		shoulder ring + mm 0.15	
9	0.042.1218.0	2	shoulder ring STANDARD	
10	0.029.1250.0	1	gasket	
11	0.029.1240.0	1	flange	
12	2.1474.010.1	7	spring washer 10	
13	2.0112.309.2	7	screw m 10 p.1.5 x 25	
14	2.1560.006.0	2	gasket 10.2 x 16	
15	2.1011.421.2	2	nut m 10 p.1.25	
16	2.1652.915.0	2	cylindrical plug 12x35	
17	2.1519.009.0/10	1	special oil seal	
18	0.039.1241.3/10	1	flywheel	
19	0.036.1242.0	1	crown wheel $Z = 126$ , mm 15	
20	2.1379.006.0	3	lock-tab 15x15x36,5	
21	2.0122.515.7	6	screw	
22	0.052.1220.3	4	engine connecting rod	
23	0.039.1250.0	8	screw m 14 p.1.5x63	
24	0.039.0068.0		con.rod half bushing - mm 1.016	
24	0.039.1225.0	8	con.rod half bushing	
24	0.039.1225.7		con.rod half bushing -mm 0.254	
24	0.039.1225.8		con.rod half bushing -mm 0.508	
24	0.039.1225.9		con.rod half bushing -mm 0.762	
25	0.046.0060.6/10	4	complete piston	1/2
25	0.046.0061.6/10		commists mistor I man 0.5	1/2

complete piston + mm 0.5

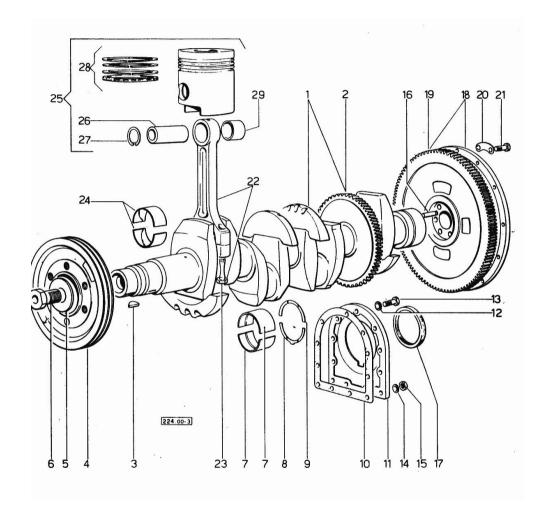


Section: ENGINE

Ref: 01.00.2

# CRANKSHAFT


Fig.	P/n	QTY	Name
25	0.046.0062.6/10		complete piston + mm 1
26	0.038.1236.0/10	4	piston pin Ø $18 / Ø 35 / L = mm 90$
27	2.1411.014.1	8	circlip 35
28	0.073.0052.6	4	piston ring set
28	0.073.0053.6		piston ring set + mm 0.5
28	0.073.0054.6		piston ring set + mm 1.0
29	0.002.4168.0	4	bearing

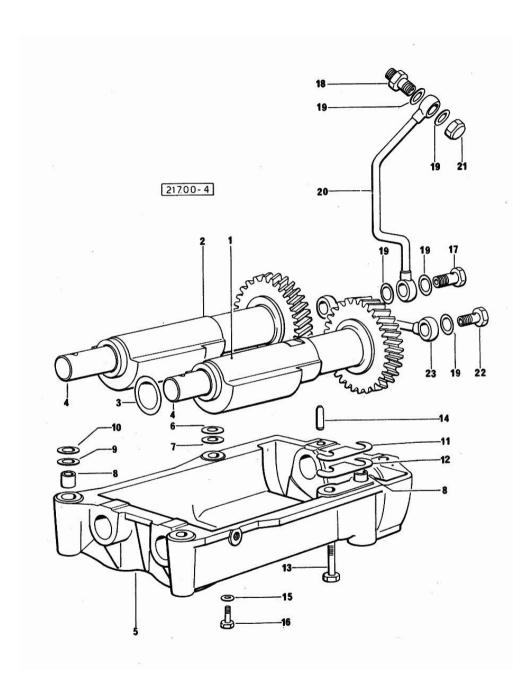

Section: ENGINE Ref: 01.00.3

## **CRANKSHAFT - COUNTER-ROTATING WEIGHTS**

Fig.	P/n	QTY	Name
Notes:			
	RY 85 SPECIAL]		
[MBRCO1	Cr 05 51 Bell IB]		
1	0.044.1263.3/20	1	mass sx/lh/li
1	2.1559.115.0	2	special bushing 26x30x30
2	0.044.1261.3/10	1	mass dx/rh/re
2	2.1559.115.0	2	special bushing 26x30x30
3	2.1589.050.0/10	4	shoulder ring 26.1x38x1
4	0.044.1266.0/20	2	shaft
5	0.044.1260.0/30	1	support
6	2.1589.049.0	2	shoulder ring 12.5x26x0.3
7	2.1579.629.0	2	spacer 12.5x26x0.1
8	2.1579.626.0	2	spacer 13.2x16x11
9	2.1579.628.0	1	spacer 16.5x26x0.1
10	2.1589.048.0	1	shoulder ring 16.5x26x0.3
11	2.1379.038.0	2	shim mm 0.1
12	2.1379.039.0	1	shim mm 0.3
13	2.0112.426.1	4	screw m 12 p.1.75x85
14	2.1631.717.0	2	roll pin 8 x 40
15	2.1310.004.2	1	flat washer 8.4x17
15	2.1474.009.1	2	spring washer 8
16	2.0112.204.2	3	screw m 8 p.1.25x14
17	2.3339.515.1	1	pipe union m 12 p.1.25
18	2.3319.041.1	1	pipe union m 12 p.1.25-p.1.75
19	2.1560.007.0	7	gasket 12.2x16
20	0.044.1562.2	1	tube
21	2.1019.048.1	1	special nut m 12 p.1.5
22	2.3332.003.1	1	pipe union m 12 p.1.25
23	0.319.1550.3	1	tube

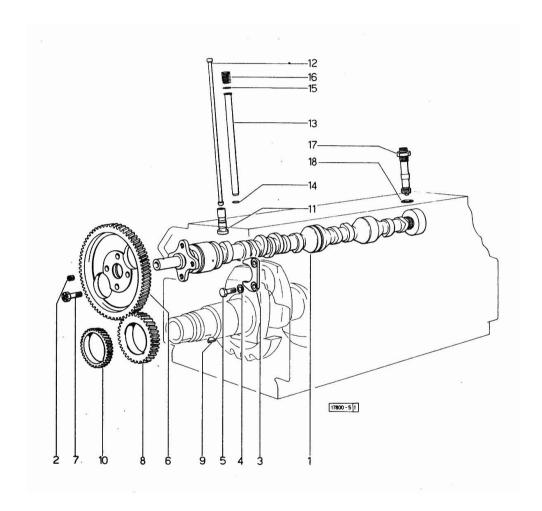


Section: ENGINE **CAMSHAFT** 

Ref: 01.00.4

Fig.	P/n	QTY	Name

Notes: IMERCURY 85 SPECIALI

[MERCU	RY 85 SPECIAL]			
1	0.044.1310.0/30	1	camshaft	
2	2.3130.001.1	1	plug 1/8" gas	
3	0.027.1314.0	1	flange	
4	2.1470.004.2	2	lock washer 8	
5	2.0112.207.2	2	screw m 8 p 1.25 x 20	
6	0.062.1321.0	1	gear z=66	
7	2.0139.005.1	4	screw m 10 p.1 x 25	
8	0.040.1320.0	1	gear z = 33	
9	2.1720.010.0	1	key 5x9	
10	0.040.1323.0/10	1	gear Z = 38	
11	0.052.1330.0/20	8	tappets	
12	0.041.1331.3	8	rod	
13	0.041.1332.0	8	sleeve	
14	2.1539.020.0	8	special oil seal 13.95x2.62	
15	2.1539.022.0	8	special oil seal 12.37x2.62	
16	2.4019.162.1/20	8	spring 17.2x46x1.8	
17	0.041.1355.3	1	transmission	
18	2.1560.013.0	1	gasket 18.2x22	

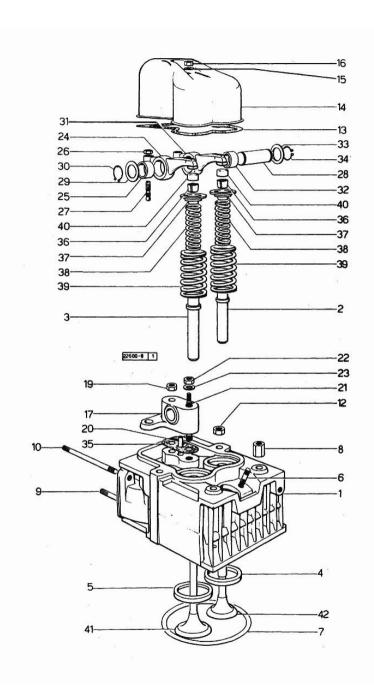


Section: ENGINE

Ref: 01.00.5

## CYLINDER HEAD

Fig.	P/n	QTY	Name
Notes:			
MERCUR	RY 85 SPECIAL]		
0	0.042.0057.6	1	gasket set
			FOR GRINDING VALVES OF ONE CYLINDER AND PISTON RING RENEWAL
1	0.044.1450.3/50	4	engine head
1	0.062.1410.3/10	4	46225 <= engine head
1	0.062.1410.3/10	4	=> 46226
2	0.045.1417.0	4	valve guide
			46225 <=
2	0.062.1417.0/10	4	valve guide => 46226
3	0.037.1416.0	4	=> 46226 valve guide
,	0.037.1410.0	7	46225 <=
3	0.062.1416.0/10	4	valve guide
			=> 46226
4	0.037.1452.0/10	4	valve seat
			46225 <=
4	0.062.1450.0/10	4	valve seat
-	0.027.1451.0/10	4	=> 46226
5	0.037.1451.0/10	4	valve seat 46225 <=
5	0.062.1451.0	4	old part number
-	0.002.11.01.0	•	=> 46226
5	2.0439.087.1/10	8	stud bolt
7	2.1569.078.0/10	4	gasket 106x118x0.5
3	2.1019.069.0	5	special nut
)	2.0432.007.1	7	stud bolt m 8 p.1.25 / p.1 x 30
10	2.0432.026.1	4	stud bolt m 8 p.1.25 - 1.00 x 110
12	2.1019.068.0	11	special nut
13	0.029.1450.0	4	gasket
14	0.039.1440.0	4	cap
15	2.1560.004.0	4	copper gasket 8.2 x 14
16	2.1099.056.2	4	special nut m 8 p.1 x 8
17	0.041.1430.0	4	support
19	2.1099.082.0	4	special nut
20	0.029.1452.0	4	tube
21	0.039.1451.0	4	stud bolt
22	2.1011.421.2	4	nut m 10 p.1.25
23	2.1310.006.2	4	flat washer 10.5x21
24	002.5937.3/30	4	rocker arm
25	2.1559.021.0/40	4	bushing 15x19x22

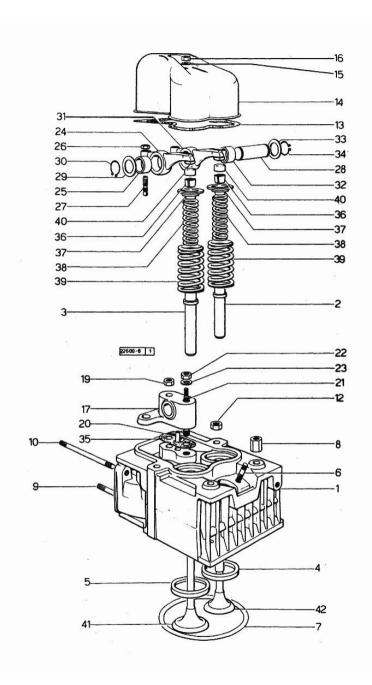


Section: ENGINE

Ref: 01.00.5

## CYLINDER HEAD

Fig.	P/n	QTY	Name
26	2.1011.405.2	8	nut m 8 p.1
27	0.021.1434.0	8	screw
28	0.041.1431.0	4	pin
29	2.1599.019.0	4	shoulder ring 19.5x31x2
30	2.1410.055.1	4	circlip 19
31	0.002.5936.3/40	4	rocker arm
32	2.1559.021.0/40	4	bushing 15x19x22
33	2.1599.019.0	4	shoulder ring 19.5x31x2
34	2.1410.055.1	4	circlip 19
35	0.034.1450.0	4	tappet gasket
36	0.002.9193.0/10	16	conical valve cotter
			46225 <=
36	0.062.1423.0	16	conical valve cotter
			=> 46226
37	0.002.9215.0/10	8	cup
			46225 <=
37	0.062.1425.0	8	cup
			=> 46226
38	2.4019.194.0	8	spring 22.70x50.7x2.1
39	2.4019.193.0	8	spring 36.15x55.2x3.2
40	0.021.1453.0/20	8	small cover
			46225 <=
40	0.062.1452.0	8	small cover
			=> 46226
41	0.042.1420.2	4	inlet valve Ø mm 8
			46225 <=
41	0.052.1420.0	4	inlet valve Ø mm 9
			=> 46226
42	0.039.1421.0	4	exhaust valve Ø mm 9
			46225 <=
42	0.071.1420.2	4	exhaust valve Ø mm 8
			=> 46226

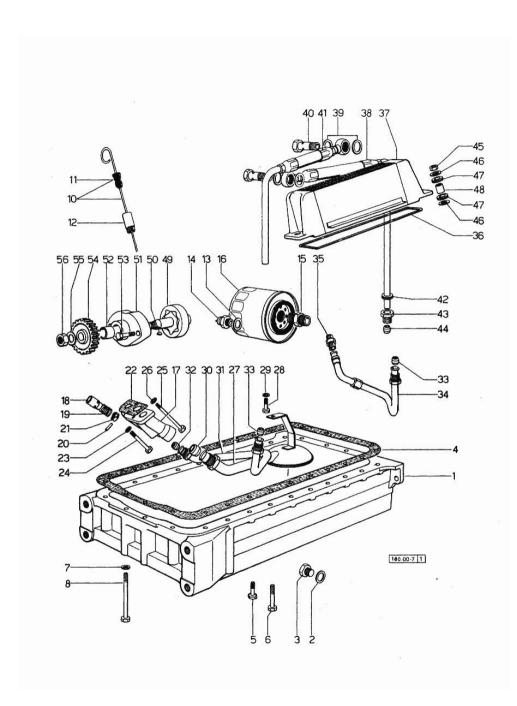


Section: ENGINE

Ref: 01.00.6

# LUBRICATION

Fig.	P/n	QTY	Name	
Notes:				
	RY 85 SPECIAL]			
1	0.045.1510.0	1	oil sump	
2	2.1560.054.0	1	gasket 21 x 26	
3	2.3199.001.2	1	plug 1/2" gas	
4	0.036.1512.0	1	gasket	
5	2.0112.211.2	2	screw m 8 p.1.25 x 30	
6	2.0112.224.2	18	screw m 8 p.1.25x75	
6	2.0112.229.2	2	screw m 8 p.1.25 x 100	
7	2.1560.004.0	4	copper gasket 8.2 x 14	
8	2.0112.217.2	2	screw m 8 p.1.25 x 45	
8	2.0112.231.1	2	screw m 8 p 1.25x110	
8	2.0112.235.2	2	screw m 8 p.1.25 x 130	
10	0.045.1513.3	1	dipstick	
11	0.034.1551.0	Î	gasket	
12	0.044.1555.0	î	spacer	
13	2.1560.008.0	1	gasket 12.2 x 18	
14	2.7099.040.0	1	pressure switch m12 p.1.75	
15	2.3339.094.1/10	1	pipe fitting m 20 p.1.5-3/4 gas	
16	0.044.1567.0	1	oil filter element	
17	0.040.1530.0/20	1	tip	
.,	0.0 10.1220.0.20	•	42085 <=	
17	0.052.1530.0	1	tip	
			=> 42086	
18	0.040.1550.0	1	small piston	
			42085 <=	
18	0.052.1571.0	1	small piston	
			=> 42086	
19	2.4019.241.1	1	spring	
			42085 <=	
19	2.4019.270.1	1	spring 9.7x54x2	
			=> 42086	
20	2.1690.314.0	1	split pin	
21	0.040.1551.0	1	stop	
			42085 <=	
21	0.054.1558.0/10	1	stop	
			=> 42086	
22	0.037.1557.0/20	1	gasket	
23	2.1474.009.1	1	spring washer 8	
24	2.0112.225.2	1	screw m 8 p.1.25 x 80	
25	2.0112.231.1	1	screw m 8 p 1.25x110	
26	2.1474.009.1	1	spring washer 8	1/2
27	0.044.1556.3/10	1	tube	1/2

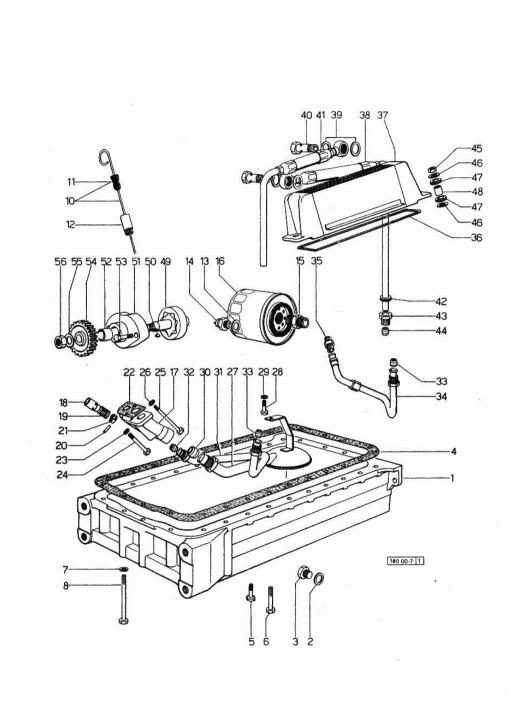

Section: ENGINE

Ref: 01.00.6

# LUBRICATION

Fig.	P/n	QTY	Name
		'	
28	2.0112.204.2	1	screw m 8 p.1.25x14
29	2.1310.004.2	1	flat washer 8.4x17
30	2.3359.014.1	1	nosepiece
31	0.044.1560.2	1	tube
32	2.3359.016.1	1	nosepiece
33	2.3359.015.1	2	nosepiece
34	0.044.1561.2/10	1	tube
35	0.045.1557.0	1	pipe fitting
36	0.044.1541.0/10	1	gasket
37	0.045.1540.3	1	oil cooler
38	0.044.1552.2/40	1	tube
39	2.1560.018.0	4	gasket 22.2 x 29
40	2.3339.107.1	2	pipe union m 22
41	0.044.1553.2/30	1	tube
42	2.6560.013.0	2	wire guide 18x1.5
43	2.3339.167.2	2	pipe fitting
44	2.3359.012.0	2	nosepiece 10x16.8
45	2.1011.105.2	2	nut m 8 p.1.25
46	2.1599.006.0	4	shoulder ring 8.4x25x2
47	0.021.1560.0	4	rubber plug
48	2.1579.159.2	2	spacer 8.8x12x16
49	0.044.1524.3/20	1	rotor
50	2.1720.005.0	1	key 4x5
51	0.036.1520.3/20	1	pump casing
52	2.1559.086.0/10	1	bush
53	2.0112.215.2	2	screw m 8 p.1.25 x 40
54	0.040.1521.0/10	1	gear z = 27
55	2.1310.007.2	1	flat washer 13 x 24
56	2.1121.109.2	1	self-locking nut m 12 p.1.25

Thank you so much for reading.

Please click the "Buy Now!"

button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email: ebooklibonline@outlook.com