# **32 Tractor Mower**

**Operators Manual** 

1010791R2





THIS SAFETY ALERT SYMBOL INDICATES IMPORTANT SAFETY MESSAGES IN THIS MANUAL. WHEN YOU SEE THIS SYMBOL, CAREFULLY READ THE MESSAGE THAT FOLLOWS AND BE ALERT TO THE POSSIBILITY OF PERSONAL INJURY OR DEATH.

M171F

If Safety Decals on this machine use the words **Danger**, **Warning or Caution**, which are defined as follows:

- DANGER: Indicates an immediate hazardous situation which if not avoided, will result in death or serious injury. The color associated with Danger is RED.
- WARNING: Indicates an potentially hazardous situation which if not avoided, will result in serious injury. The color associated with Warning is ORANGE.
- CAUTION: Indicates an potentially hazardous situation which if not avoided, may result in minor or moderate injury. It may also be used to alert against unsafe practices. The color associated with Caution is YELLOW.

If Safety Decals on this machine are ISO two panel Pictorial, decals are defined as follows:

- The first panel indicates the nature of the hazard.
- The second panel indicates the appropriate avoidance of the hazard.
- Background color is YELLOW.
- Prohibition symbols such as








if used, are RED.



IMPROPER OPERATION OF THIS MACHINE CAN CAUSE INJURY OR DEATH. BEFORE USING THIS MACHINE, MAKE CERTAIN THAT EVERY OPERATOR:

- Is instructed in safe and proper use of the machine.
- Reads and understands the Manual(s) pertaining to the machine.
- Reads and understands ALL Safety Decals on the machine.
- Clears the area of other persons.
- Learns and practices safe use of machine controls in a safe, clear area before operating this machine on a job site.

It is your responsibility to observe pertinent laws and regulations and follow Case Corporation instructions on machine operation and maintenance.

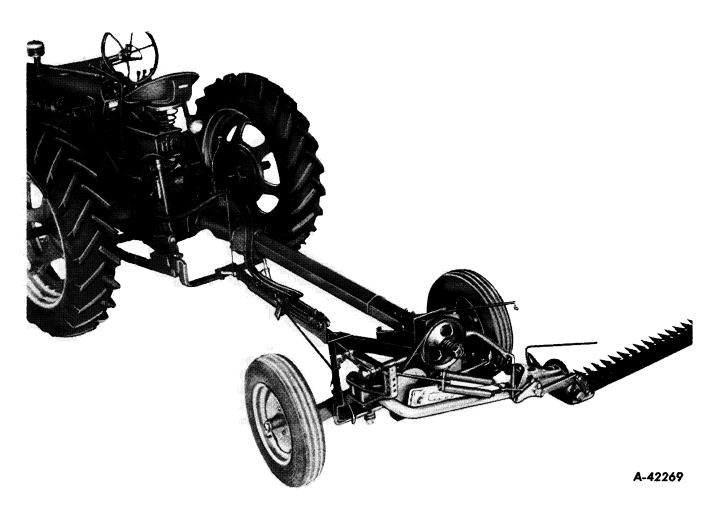

No. 32 Tractor Mower hitched to Farmall® 300 Tractor

## REGULAR EQUIPMENT

## The No. 32 Tractor Mower is supplied with the following standard equipment unless otherwise requested:

455 616 R93		with MB 2041 guards, 7-ft. (weed bar).
MA 1 082		7-ft., with M 333-1/2 smooth sections.
ME 32 935		Pitman, ball bearing.
456 628 R91		Slip clutch pulley (900 r.p.m.).
455 573 R91	Outer shoe grass rod (for use with cu	tter bars with 455 558 R1 outer shoe).

#### SPECIAL EQUIPMENT

The following special equipment can be obtained on order:

ZMC 730
455 600 R93
455 601 R93
455 602 R93
455 622 R92
455 623 R92
455 624 R92
455 613 R92 Cutter bar with MB 2041 guards and smooth ledger plates, 5-ft. (weed bar).
455 614 R93
455 615 R93
451 876 R93
451 877 R93
451 878 R93
451 870 R92
451 871 R92
451 872 R92
451 873 R93
451 874 R93
451 875 R93
456 567 R2
456 568 R1
M 32 812
M 32 813
M 22 330
456 063 R91
456 064 R91
MB 332
MB 408
MB 409
MD 332
MD 408
MD 409
M 22 668 Knife, 5-ft., with MC 139 head and ME 333 under-serrated sections (for level cut bars).
M 22 669 Knife, 6-ft., with MC 139 head and ME 333 under-serrated sections (for level cut bars).
M 22 670 Knife, 7-ft., with MC 139 head and ME 333 under-serrated sections (for level cut bars).
MG 537 Knife, 5-ft., with MC 534 head and MD 333 smooth soft tempered sections (for low cut bars).
MG 537-1/2. Knife, 6-ft., with MC 534 head and MD 333 smooth soft tempered sections (for low cut bars).
MC 527 1/2 Unifer 7 ft with MC 524 head and MD 222 amount soft tempered sections (for low cut bars).
MG 537-1/3. Knife, 7-ft., with MC 534 head and MD 333 smooth soft tempered sections (for low cut bars).
M 22 579

# SPECIAL EQUIPMENT—Continued

## The following special equipment can be obtained on order:

M 22 580
M 22 836
(for weed and cardo bars).
M 22 837
457 618 R91Knife, 7-ft., with MA 999 head and 457 607 R1 chrome plated heavy under-serrated sections
(for weed and cardo bars).
457 617 R91Knife, 6-ft., with MA 999 head and 457 607 R1 chrome plated heavy under-serrated sections
(for weed and cardo bars). 457 614 R91 Knife, 7-ft., with MA 999 head and 457 605 R1 chrome plated smooth sections
(for weed and cardo bars).
457 613 R91 Knife, 6-ft., with MA 999 head and 457 605 R1 chrome plated smooth sections
(for weed and cardo bars).
457 616 R91 Knife, 7-ft., with MC 139 head and 457 606 R1 chrome plated, under-serrated sections (for level cut bars).
457 615 R91 Knife, 6-ft., with MC 139 head and 457 606 R1 chrome plated, under-serrated sections
(for level cut bars).
457 610 R91
457 609 R91
(for level cut bars).
M 259-1/2 Outer shoe sole, 2-1/4" wide.  M 1 395 Outer shoe sole, 1-1/2" wide.
MC 22 209
456 629 R91
The following machine attachments can be obtained on order:
459 387 R91 (For Farmall Type Tractors except Super A, 100 and 130) Manual cutter bar lift.
459 388 R91 Lift-all cylinder cutter bar lift.
459 389 R91
ZMA 101
ZMA 333
ZMA 323
624 936 R91 Safety light socket.
624 342 R91



Our support email: ebooklibonline@outlook.com