ORIGINAL INSTRUCTIONS

Magnum[™] 250
Magnum[™] 280
Magnum[™] 310
Magnum[™] 340
Magnum[™] 380
Magnum[™] 310 Rowtrac[™]
Magnum[™] 340 Rowtrac[™]
Magnum[™] 380 Rowtrac[™]
Tractor

OPERATOR'S MANUAL



PIN ZFRF05001 and above

Contents

NOTE: The Operator's Manual consists of two volumes. The first volume contains operating information, the second volume the maintenance and diagnostic information.

1 GENERAL INFORMATION	
Note to the owner	
Engine tampering	1-2
Tractor intended use	1-2
Electro-magnetic compatibility (EMC)	
ISOBUS certification	
Product identification	
Manual storage	
Component identification	
Selective Catalytic Reduction (SCR) system	
2 SAFETY INFORMATION	
Safety rules and signal word definitions	2-1
Safety rules - General	2-2
Safety rules - General maintenance safety	2-4
Safety rules - Wheels and tires	2-4
Safety rules - Driving on public roads and general transportation saf	ety 2-4
Safety rules - Fire and explosion prevention	2-5
Safety rules - General battery safety	2-5
Safety rules - Hydraulic system safety	2-6
Safety rules - Instructional seat safety	2-6
Safety rules - Operator presence system	2-7
Safety rules - Power Take-Off (PTO)	
Safety rules - Reflectors and warning lights	2-7
Safety rules - Seat belts	
Safety rules - Roll Over Protective Structure (ROPS)	2-8
Safety rules - Cab protection	
Safety rules - Air conditioning system	
Safety rules - Personal Protective Equipment (PPE)	
Safety rules - Do Not Operate tag	
Safety rules - Hazardous chemicals	
Safety rules - Utility safety	
Safety rules - Electrical storm safety	
Safety rules - Mounting and dismounting	
Safety rules - Working at heights	
Safety rules - Lifting and overhead loads	
Safety rules - Implements, tools and trailers	
Safety rules - Roll over and tip over	
Proposition 65	2-13
Ecology and the environment	
Safety signs	
Selective Catalytic Reduction (SCR) exhaust treatment - Safety sign	ıs 2-25

3 CC	ONTROLS AND INSTRUMENTS	
A	CCESS TO OPERATOR'S PLATFORM Tractor access Lower step	3-1 3-3
0	PERATOR'S SEAT Control identification	3-4
IN	ISTRUCTOR'S SEAT Overview	3-8
F	ORWARD CONTROLS Steering column Front console Pedal controls	3-12
LE	EFT-HAND SIDE CONTROLS Pneumatic trailer brake	3-16
R	Armrest console Multi function handle Minimum/maximum RPM throttles Control panel Remote valve controls Joystick Armrest compartment Adjusting the armrest console	3-18 3-23 3-25 3-35 3-36 3-38
R	EARWARD CONTROLS Fender console Automatic temperature controls Automatic temperature control system Ventilation	3-44 3-47
0	VERHEAD CONTROLS Interior lamps	3-50
	XTERIOR CONTROLS Rear fender Front hitch	
IN	ISTRUMENT CLUSTER Overview Gauges Status and warning icons	3-55

Upper display	
Lower display	
Keypad	
Setup menu	
Rear tire radius and track radius charts	
Adjust menu	
Performance features	3-84
4 OPERATING INSTRUCTIONS	
COMMISSIONING THE UNIT	1 1
Engine - Safety rules	4-1
STARTING THE UNIT	
Normal engine starting	1_1
Cold starting aids	
Cold temperature operation	
Cold temperature operation	4-10
STOPPING THE UNIT	
Stopping the engine	4-12
MOVING THE UNIT	
FULL POWERSHIFT TRANSMISSION	
Powershift transmission	4-14
Best practices for prolonged transmission life	
Inching pedal and throttle	
Powershift transmission controls	
Upper display - Powershift transmission	
Driving the Powershift vehicle	
Setting default gears	
Automatic Productivity Management (APM)	
CONTINUOUSLY VARIABLE TRANSMISSION (CVT)	
Continuously Variable Transmission (CVT) brake, pedal and throttle operation	
Continuously Variable Transmission (CVT) controls	
Upper display	
Continuously Variable Transmission (CVT) operation	
Driving the Continuously Variable Transmission (CVT)	
Transmission messages	
POWERSHIFT AND CVT TRANSMISSIONS	
Selective Catalytic Reduction (SCR) system	
Engine idling or full catalyst messages	
Mechanical Front Drive (MFD)	
Differential lock system	4-74
Suspended axle	
Ride control	
Engine power boost	
Constant engine speed	
Suspended cab	4-87

	Electronic end of row system	-88
ļ	PARKING THE UNIT Automatic park lock	-94
	Automatio park look	01
5 T	RANSPORT OPERATIONS	
	ROAD TRANSPORT	
	Tractor warning lamps and Slow Moving Vehicle (SMV) symbol	5-1
	Wide transport marker light	
	Tractor warning lamps	
	Safe transport speed	
	Safety chain	
	Saloty shall	0 1
(SHIPPING TRANSPORT	
`	Securing the tractor for shipping	5-8
	RECOVERY TRANSPORT	
•	Safety rules	5-9
	Towing the tractor5	5-10
6 V	WORKING OPERATIONS	
(GENERAL INFORMATION	
	Overview	6-1
	REAR POWER TAKE-OFF (PTO)	
	Safety rules	
	Connecting the Power Take-Off (PTO)	
	Interchangeable Power Take-Off (PTO) shaft	
	Rear Power Take-Off (PTO) operation	
	Auto Power Take-Off (PTO) operation	
	FRONT POWER TAKE-OFF (PTO)	
	Overview 6	-20
	Front Power Take-Off (PTO) operation	5-21
	REAR HITCH	
	Identification	
	Link adjustment	
	Hydraulic links 6	
	Sway limiter adjustment 6	
	Lower link block adjustment 6	35
	Mechanical float adjustment	37

Hitch quick coupler - Category III/IIIN	6-43
Hitch operation	
Hitch remote switch operation	
Position control operation	
Load control operationSlip control operation	
Hitch set point	
FRONT HITCH	
Overview Front hitch operation	
· 	
DRAWBARS AND TOWING ATTACHMENTS Safety rules	6-69
Drawbar capacity/position	
Adjusting the drawbar	
TRAILER BRAKING SYSTEMS	
Safety rules	6-76
Trailer brake connections	
Air pressure monitoring	6-78
AUXILIARY CONNECTIONS	
Auxiliary power and lighting	
Cab power connections	
Radar connectionImplement ISOBUS connector	
	0 00
HYDRAULIC REMOTE CONTROL VALVES	0.04
Valve couplers and connections	
Power beyond circuit	
Flow capacity	
Hydraulic transport lock	6-91
Operating the controls	
Remote valve display screens	
Remote hydraulic auto mode	
Auto depth control	
Joystick operation	6-104
BALLASTING THE TRACTOR	0.400
Guidelines Tire load and inflation charts	b-109 6-120
Weights, cast metal	
Wheel slip and power hop performance	

MECHANICAL FRONT DRIVE (MFD) AXLES	
Front axle identification	6-148
Tire combinations and tread positions	
Steering and oscillation stops	
Tread and fender settings - Class 4.5 fixed front axles	
Tread and fender settings - Class 4.75 and 5.0 fixed front axles	
Tread and fender settings - Class 4.75 and 5.0 saddle suspended front axles	
Tread and fender settings - Class 5.0 wide front axles	
Front wheel fendersFront wheel fenders - Class 4.5 fixed axles	
Front wheel fenders - Class 4.75 and 5.0 fixed and suspended axles	
Front wheel fenders - Class 5.0 wide fixed and suspended axles	
REAR AXLE	
Rear wheel installation	6-202
Rear wheel tread settings	
Dual/triple wheel setup for 508 mm (20 in)/559 mm (22 in) row spacing	
Adjustable rear wheel	6-221
REAR TRACKS	
Tire load and inflation charts Tractors with rear tracks	
Maximum front ballast recommendations	
Front wheel tread settings	
Track preconditioning	
Factory and field track settings	0-233
7 MAINTENANCE	
GENERAL INFORMATION	7 1
Safety rules Dealer service and parts	
Maintenance guidelines	
Opening the hood	
Closing the hood	
Filling the fuel tank	
Filling the Diesel Exhaust Fluid (DEF)/AdBlue® tank	
Battery disconnect switch	
Battery access and service	
Tire and rim service	
Tractor jacking points	
Capacities	. 7-15
Consumables - Engine oil	. 7-16
Consumables - Transmission/hydraulic system fluid	
Consumables - Diesel fuel	
Consumables - Biodiesel fuels	
Consumables - Diesel Exhaust Fluid (DEF)/AdBlue®	
Consumables - Organic Acid Technology (OAT) coolant	
Maintenance chart notes	

7-27
7-29 7-32 7-34 7-37
7-40 7-41 7-42
7-43 7-44 7-45 7-45 7-45
7-46
7-48
7-54 7-56 7-57
7-59
7-60 7-62 7-64 7-65 7-66 7-68 7-70

Transmission oil pressure	
Every 400 hours	
Cab air filter*	7-74
Every 600 hours	
Engine oil and filter*	
Engine coolant antifreeze protection	
Engine coolant hoses and clamps	
Engine fuel filter*	
Engine auxiliary fuel filter*	
Fuel system bleeding	
Changeable Power Take-Off (PTO) internal splines	
Diesel Exhaust Fluid (DEF)/AdBlue® in-line filter	
Front Power Take-Off (PTO) dropbox oil	
Engine air precleaner*	
	7 00
Every 1000 hours or annually	
Pneumatic brake system dryer	7-94
Powershift transmission clutch calibration	7-95
Every 1200 hours or annually	
Differential and planetary oil	7-101
Engine air filters*	
Every 1500 hours	
Transmission oil	
Hydraulic oil filter*	
Transmission oil filter*	
Idler/roller wheel oil	7-113 7-114
Engine oranicade inter	,
Every 3000 hours	
Engine valve adjustment (Note C)	7-118
Every 2600 hours	
Every 3600 hours Diesel Exhaust Fluid (DEF)/AdBlue® supply module filter	7 ₋ 110
Dicco. Extrador Francisco Cappiy modulo milei	. 110
Every 4000 hours or every four years	
Engine coolant	7-122

	As required	
	Vehicle fire prevention	7-125
	Track inspection and bolt torque	7-126
	Track rotation	
	Track drive wheel and idler bolt torque	
	Track tension release	
	Track alignment	
	Grille screen and radiator area	
	Fuel tank vent filter	
	Transmission clutch and accumulator	
	Tire pressure	
	Fan belt	7-137 7-142
	Diesel Exhaust Fluid (DEF)/AdBlue® tank	
	Remote valve conjection bottle	
	Cab fabric and carpet	
	Seat belt	
	Fuse and relay locations	
	Electrical component location	
	Lamps and bulbs	/-153
	STORAGE	
	Preparing for storage	
	Removal from storage	7-155
	ELECTRICAL SYSTEM	
	Radio or audio system	7-156
	Battery removal and installation	7-157
	Auxiliary battery connections	7-159
	Headlight	7-160
	LED work lights	7-161
	Fender tail light and warning light	7-161
	Roof front warning and work light	7-162
	Roof rear warning light	7-163
	High intensity work light	
	Wide transport marker light	7-165
	Rotating beacon light	
	Interior light	7-167
8	TROUBLESHOOTING	
J		
	ALARM(S)	
	Display warnings overview	
	Display warnings - Level 1	
	Display warnings - Level 2	
	Display warnings - Level 3	
	Display warnings - Level 4	8-9

SYI	MPTOM(S)	
	Engine symptoms	8-11
	Transmission symptoms	
	Hydraulic symptoms	
	Hitch symptoms	
	Brake symptoms	
	Cab environment symptoms	
	Electrical power system symptoms	
	CIFICATIONS	
_	ine specifications	
	rer train specifications	
•	rating speeds	
-	rating speeds - Rowtrac™ tractors	
Vehi	icle dimensions and shipping weight	9-11
Vehi	icle dimensions and shipping weight - Rowtrac™ tractors	9-17
Max	imum operating weight	9-19
10 AC	CESSORIES	
	ning system displays	10-1
Rea	r view mirrors	10-2
Chei	mical tank mounting	10-4
Load	der connection and operation	10-6
Gen	eral accessories	10-7

1 - GENERAL INFORMATION

Note to the owner

This manual contains important information about the safe operation, adjustment and routine maintenance of your **Magnum™** or **Magnum™** Rowtrac™ series tractor. The manual is divided into 10 chapters as outlined in the table of contents. Refer to the index at the end of this manual for locating specific items about your tractor.

Do NOT operate or permit anyone to operate or service this machine until you or the other persons have read this manual. Use only trained operators who have demonstrated the ability to operate and service this machine correctly and safely.

This Operator's Manual is to be stored in the manual compartment behind the operator's seat in the vehicle. Make


sure this manual is in good condition. Contact your dealer to obtain additional manuals.

Your CASE IH dealer will instruct you in the general operation of your new equipment. Your dealer's staff of factory-trained service technicians will be glad to answer any questions that may arise regarding the operation of your machine. They will also provide any after-sales service you may need, and genuine CASE IH parts, your guarantee of quality and match.

CASE IH **Max ServicesM** is also available. Call 1-877-4CASEIH (1-877-422-7344) or email maxservice.na@cnh.com.

Tractors equipped with rear tracks

On **Rowtrac™** models, refer to the information starting on page **Operating speeds - Rowtrac™ tractors** for transport speed weight limitations.

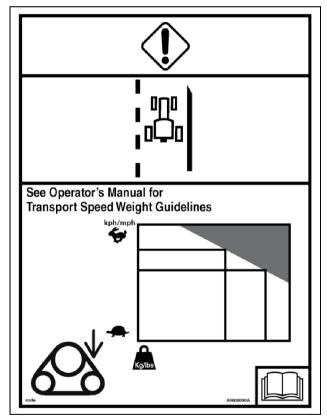

RAIL14TR03870BA

Engine tampering

The fuel system, exhaust after-treatment system, and engine on your machine are designed and built to government emissions standards. Tampering by dealers, customers, operators, and users is strictly prohibited by law.

Failure to comply could result in government fines, rework charges, invalid warranty, legal action, and possible confiscation of the machine until rework to original condition is completed. Engine service and/or repairs must be done by a certified technician only!

Tractor intended use

Magnum™ or Magnum™ Rowtrac™ series tractors, with standard equipment and authorized attachments, are intended to be used for customary farming, land leveling and related agriculture operations (intended use). Installation of utility (dozer) blades, tile plows, or push bars on the tractor is not recommended. Any tractor damage resulting from the installation and/or use of such equipment is not covered by the tractor warranty.

Consult an authorized dealer or CNH Industrial America LLC on changes, additions or modifications that can be required for this machine to comply with various regulations and safety requirements. Unauthorized modifications will cause serious injury or death. Anyone making such unauthorized modifications is responsible for the consequences.

The tractor is not designed for light/heavy forestry applications; usage is prohibited for forestry applications.

Do not use this machine for any purpose or in any manner other than as described in the manual, decals, or other product safety information provided with the machine. These materials define the machine's intended use.

Use in any other way is considered as contrary to the intended use. The manufacture accepts no liability for any damage or injury resulting from this misuse and these risks must be born solely by the user.



Our support email: ebooklibonline@outlook.com