OPERATOR'S MANUAL

T8.320

T8.350

T8.380

T8.410

T8.435

T8.380 SmartTrax™

T8.410 SmartTrax[™]

T8.435 SmartTrax[™]

Tractor

PIN ZGRE05001 and above



Contents

NOTE: The Operator's Manual consists of two volumes. The first volume contains operating information, the second volume the maintenance and diagnostic information.

1 GENERAL INFORMATION	
Note to the owner	
Engine tampering	1-2
Tractor intended use	
Electro-magnetic compatibility (EMC)	
ISOBUS certification	
Product identification	
Machine orientation	
Component identification	
Component Identinodien	
2 SAFETY INFORMATION	
Safety rules and signal word definitions	2.1
Safety rules - General	
·	
Safety rules - General maintenance safety	
Safety rules - Wheels and tires	
Safety rules - Driving on public roads and general transportation	-
Safety rules - Fire and explosion prevention	
Safety rules - General battery safety	
Safety rules - Hydraulic system safety	
Safety rules - Instructional seat safety	
Safety rules - Operator presence system	
Safety rules - Power Take-Off (PTO)	
Safety rules - Reflectors and warning lights	
Safety rules - Seat belts	
Safety rules - Roll Over Protective Structure (ROPS)	
Safety rules - Cab protection	
Safety rules - Air conditioning system	
Safety rules - Personal Protective Equipment (PPE)	
Safety rules - Do Not Operate tag	
Safety rules - Hazardous chemicals	
Safety rules - Utility safety	
Safety rules - Electrical storm safety	
Safety rules - Mounting and dismounting	
Safety rules - Working at heights	
Safety rules - Lifting and overhead loads	
Safety rules - Implements, tools and trailers	
Safety rules - Roll over and tip over	
Ecology and the environment	
Safety signs	
Global warming potential	2-24

3 CONTROLS AND INSTRUMENTS	
ACCESS TO OPERATOR'S PLATFORM	
Tractor access	3-1
Lower step	3-3
OPERATOR'S SEAT Control identification	3-4
Control Idonation	
INSTRUCTOR'S SEAT	0.0
Overview	3-8
FORWARD CONTROLS	
Steering column	
Front console	
LEFT-HAND SIDE CONTROLS	
Pneumatic trailer brake	3-16
RIGHT-HAND SIDE CONTROLS	
Armrest console	3-17
Multi function handle	
Engine speed control	
Remote valve controls	
Joystick	
Rear hitch controls	3-37
Armrest compartment	
Adjusting the armrest console	3-41
REARWARD CONTROLS	
Fender console	
Automatic temperature controls	
Automatic temperature control system	
OVERHEAD CONTROLS	
Interior lamps	3-51
EVTEDIOD CONTDOLS	
EXTERIOR CONTROLS Rear fender	3-52
Front hitch	
INSTRUMENT CLUSTER	
Overview	
Status and warning icons	

Upper display	
Lower display	
Keypad	
Setup menu	
Rear tire radius and track radius charts	
Adjust menu	
Performance features	3-84
4 OPERATING INSTRUCTIONS	
COMMISSIONING THE UNIT Engine - Safety rules	1 1
Eligilie - Salety fules	4-1
STARTING THE UNIT	
Normal engine starting	4-4
Cold starting aids	4-8
Cold temperature operation	4-10
STOPPING THE UNIT	
Stopping the engine	1 12
Stopping the engine	4-12
MOVING THE UNIT	
FULL POWERSHIFT TRANSMISSION	
Powershift transmission	
Best practices for prolonged transmission life	
Inching pedal and throttle	
Powershift transmission controls	
Upper display - Powershift transmission	
Driving the Powershift vehicle	
Setting default gears	
Ground Speed Management (GSM)	
CONTINUOUSLY VARIABLE TRANSMISSION (CVT)	
Introduction	
Auto Command brake, pedal and throttle operation	
Auto Command controls	
Upper display	
Auto Command operation	
Eco-Draft or Shuttle mode	4-57
Driving the Auto Command transmission	
Transmission messages	
POWERSHIFT AND CVT TRANSMISSIONS	
Selective Catalytic Reduction (SCR) system	
Engine idling or full catalyst messages	
Mechanical Front Drive (MFD)	
Differential lock system	
Suspended axle	
Ride control Engine power boost	
•	
Constant engine speed	4-92

	Suspended cab4 Headland management system4	
	PARKING THE UNIT Automatic park lock	102
5	TRANSPORT OPERATIONS	102
J	ROAD TRANSPORT	
	Tractor warning lamps	
	SHIPPING TRANSPORT Securing the tractor for shipping	5 4
	Securing the tractor for snipping	5-4
	RECOVERY TRANSPORT Safety rules	5-5
	Towing the tractor	
c	WODKING ODEDATIONS	
O	WORKING OPERATIONS	
	GENERAL INFORMATION Overview	6-1
	REAR POWER TAKE-OFF (PTO)	
	Safety rules	
	Connecting the Power Take-Off (PTO)	
	Rear Power Take-Off (PTO) operation	
	Power Take-Off (PTO) fender switch operation	
	Auto Power Take-Off (PTO) operation	
	FRONT POWER TAKE-OFF (PTO)	
	Overview	6-20
	Front Power Take-Off (PTO) operation	5-21
	REAR HITCH	
	Identification	6-24
	Link adjustment	
	Hitch high clearance adjustment	
	Hydraulic links	
	Lower link block adjustment	
	Mechanical float adjustment	
	Hitch quick coupler - Category III/IIIN6	
	Hitch quick coupler - Category IVN	
	Hitch operation 6	o-48

ŀ	Hitch remote switch operation	6-53
	Position control operation	
I	Load control operation	6-56
,	Slip control operation	6-58
I	Hitch set point	6-60
FRON	IT HITCH	
(Overview	
I	Front hitch operation	6-62
DRAV	VBARS AND TOWING ATTACHMENTS	
Ç	Safety rules	6-69
I	Drawbar capacity/position	6-70
,	Adjusting the drawbar	6-74
TRAIL	ER BRAKING SYSTEMS	
	Safety rules	
	Trailer brake connections	
,	Air pressure monitoring	6-78
	LIARY CONNECTIONS	
,	Auxiliary power and lighting	6-79
	Cab power connections	
Į.	Radar connection	6-82
	Implement ISOBUS connector	6-83
	RAULIC REMOTE CONTROL VALVES	0.04
	Valve couplers and connections	
	Motor return circuit	
	Flow capacity	
	Hydraulic transport lock	
	Operating the controls	
	Remote valve display screens	
	Remote hydraulic auto mode	
	Auto depth control	
	Joystick operation6	
RALL	ASTING THE TRACTOR	
	Guidelines	3-108
=	Tire load and inflation charts	, 100 3-119
	Weights, cast metal6	
'	Wheel slip and power hop performance6	5-147
MECH	HANICAL FRONT DRIVE (MFD) AXLES	
	Front axle identification	3-150

	Tire combinations and tread positions	6-159
	Tread and fender settings - Class 4.75 and 5.0 saddle suspended front axles .	
	Tread and fender settings - Class 5.0 wide front axles	6-176
	Front wheel fenders	
	Front wheel fenders - Class 4.75 and 5.0 fixed and suspended axles	
	Front wheel fenders - Class 5.0 wide fixed and suspended axles	
	wide the lender kit	. 6-169
DE		
KEA	AR AXLE Rear wheel installation	6-195
	Rear wheel tread settings	
	Dual/triple wheel setup for 508 mm (20 in)/559 mm (22 in) row spacing	
	Adjustable rear wheel	
REA	AR TRACKS	
	Tire load and inflation charts Tractors with rear tracks	
	Maximum front ballast recommendations	
	Front wheel tread settings	
	Track preconditioning Factory and field track settings	
	,	
7 MAII	NTENANCE	
GEI	NERAL INFORMATION	
S	afety rules	7-1
	laintenance guidelines	
_		
	pening the hood	7-3
C	pening the hood	7-3 7-5
C F	pening the hoodlosing the hoodlosing the hoodliling the fuel tank	7-3 7-5 7-6
C F B	pening the hood losing the hood illing the fuel tank attery disconnect switch	7-3 7-5 7-6 7-8
C F B B	pening the hood losing the hood illing the fuel tank attery disconnect switch attery access and service	7-3 7-5 7-6 7-8 7-9
C F B B T	pening the hood losing the hood illing the fuel tank attery disconnect switch attery access and service	7-3 7-5 7-6 7-8 7-9
C F B T T	ppening the hood losing the hood illing the fuel tank attery disconnect switch attery access and service ire and rim service. ractor jacking points	7-3 7-5 7-6 7-8 7-9 7-10
C F B T T C	ppening the hood losing the hood illing the fuel tank attery disconnect switch attery access and service ire and rim service. ractor jacking points	7-3 7-5 7-6 7-8 7-9 7-10 7-12
C F B T T C	ppening the hood losing the hood illing the fuel tank attery disconnect switch attery access and service ire and rim service. ractor jacking points	7-3 7-5 7-6 7-8 7-9 7-10 7-12 7-14
C F B B T C C	ppening the hood losing the hood illing the fuel tank attery disconnect switch attery access and service ire and rim service. ractor jacking points consumables - Engine oil consumables - Transmission/hydraulic system fluid consumables - Diesel fuel	7-3 7-5 7-6 7-8 7-9 7-10 7-12 7-14 7-15
C F B T T C C C	ppening the hood flosing the hood filling the fuel tank attery disconnect switch attery access and service fire and rim service fractor jacking points flonsumables - Engine oil flonsumables - Transmission/hydraulic system fluid flonsumables - Diesel fuel flonsumables - Organic Acid Technology (OAT) coolant	7-3 7-5 7-6 7-8 7-10 7-12 7-14 7-15 7-15
C F B T C C C C	ppening the hood losing the hood illing the fuel tank attery disconnect switch attery access and service ire and rim service. ractor jacking points apacities consumables - Engine oil consumables - Transmission/hydraulic system fluid consumables - Diesel fuel consumables - Organic Acid Technology (OAT) coolant laintenance chart notes	7-3 7-5 7-6 7-8 7-10 7-12 7-14 7-15 7-16 7-17
C F B T C C C C	ppening the hood flosing the hood filling the fuel tank attery disconnect switch attery access and service fire and rim service fractor jacking points flonsumables - Engine oil flonsumables - Transmission/hydraulic system fluid flonsumables - Diesel fuel flonsumables - Organic Acid Technology (OAT) coolant	7-3 7-5 7-6 7-8 7-10 7-12 7-14 7-15 7-16 7-17
F B T C C C C M	ppening the hood closing the hood cilling the fuel tank attery disconnect switch attery access and service cire and rim service. ractor jacking points consumables - Engine oil consumables - Diesel fuel consumables - Organic Acid Technology (OAT) coolant laintenance chart notes laintenance summary decal	7-3 7-5 7-6 7-8 7-10 7-12 7-14 7-15 7-16 7-17
F B T C C C C M M	ppening the hood closing the hood illing the fuel tank attery disconnect switch attery access and service ire and rim service ractor jacking points apacities consumables - Engine oil consumables - Diesel fuel consumables - Organic Acid Technology (OAT) coolant laintenance chart notes laintenance summary decal	7-3 7-5 7-6 7-8 7-9 7-10 7-14 7-15 7-16 7-17 7-18 7-20
Mai	ppening the hood closing the hood illing the fuel tank attery disconnect switch attery access and service ire and rim service ractor jacking points apacities consumables - Engine oil consumables - Transmission/hydraulic system fluid consumables - Diesel fuel consumables - Organic Acid Technology (OAT) coolant laintenance chart notes laintenance summary decal	7-3 7-5 7-6 7-8 7-9 7-10 7-14 7-15 7-16 7-17 7-18 7-20
Mai Mai	ppening the hood losing the hood losing the hood attery disconnect switch attery access and service. ire and rim service. ractor jacking points apacities consumables - Engine oil consumables - Diesel fuel consumables - Organic Acid Technology (OAT) coolant laintenance chart notes laintenance planning laintenance chart varning message display	7-3 7-5 7-6 7-8 7-10 7-12 7-14 7-15 7-16 7-17 7-20 7-21
Mai Mai At v	ppening the hood closing the hood illing the fuel tank attery disconnect switch attery access and service ire and rim service ractor jacking points apacities consumables - Engine oil consumables - Transmission/hydraulic system fluid consumables - Diesel fuel consumables - Organic Acid Technology (OAT) coolant laintenance chart notes laintenance summary decal	7-3 7-5 7-6 7-8 7-9 7-10 7-14 7-15 7-16 7-17 7-18 7-20 7-21

Transmission oil filter switch	
First 10 to 50 hours Wheel bolt torque	7-36
Every 10 hours or daily Engine oil level Transmission oil level Engine coolant level Air reservoir Rear hitch and front axle	7-39 7-40 7-40
Every 50 hours or weekly Engine auxiliary fuel filter	7-41
First 100 hours Powershift transmission clutch calibration	7-43
Every 100 hours Front hitch	
Every 200 hours Track alignment	7-52
Every 300 hours Battery water level (Note B) Engine air intake and exhaust hoses Engine coolant level - deaeration tank Weight bolt torque Front axle (Note A) Rear hitch (Note A) Fuel tank Differential and planetary oil level (Note B) Transmission oil pressure Front Power Take-Off (PTO) oil level	7-55 7-57 7-58 7-59 7-61 7-63 7-64 7-65
Every 400 hours Cab air filter*	7-67

Every 600 hours	
Engine oil and filter*	7-70
Engine coolant antifreeze protection	
Engine coolant hoses and clamps	
Engine fuel filter*	
Engine auxiliary fuel filter*	
Fuel system bleeding	
Changeable Power Take-Off (PTO) internal splines	
Engine air precleaner*	
Lingine all precleaner	7-02
From (1000 become on enginelly)	
Every 1000 hours or annually	
Pneumatic brake system dryer	
Powershift transmission clutch calibration	7-84
Front Power Take-Off (PTO) oil and filter*	
Front Power Take-Off (PTO) dropbox oil	7-92
Every 1200 hours or annually	
Differential and planetary oil	7-93
Engine air filters [*]	
Every 1500 hours	
Every 1500 hours	400
Transmission oil	-100
Regulated system oil filter*	
Main transmission oil filter*	
Idler/roller wheel oil 7- Engine crankcase filter* 7-	
Engine oralikoade iliter	100
Every 2000 hours	
Every 3000 hours	
Engine valve adjustment (Note C)7	-110
Every 4000 hours or every four years	
Engine coolant	'-111
As required	
·	440
Vehicle fire prevention	
Track inspection and bolt torque	
Track rotation	-114 -111
Track tension release	
Track alignment	
Cab air filter*	
Grille screen and radiator area	
Fuel tank vent filter	-123
Transmission clutch and accumulator	-123
Tire pressure	
Fan belt7	-125

	Remote valve collection bottle	_
	Remote valve couplers	
	Cab fabric and carpet	
	Seat belt	7-133
	Fuse and relay locations	
	Electrical component location	7-134
	Lamps and bulbs	
	0.7.0.0.4.0.5	
	STORAGE	
	Preparing for storage	
	Removal from storage	7-141
	ELECTRICAL SYSTEM	
	Radio or audio system	7-142
	Battery removal and installation	
	Auxiliary battery connections	
	Headlight	
	LED work lights	
	Grille work light	
	Fender tail light and warning light	
	Roof warning light	
	Roof work light	
	High intensity work light	
	Wide transport marker light	
	Rotating beacon light	
	Interior light	7-153
8	TROUBLESHOOTING	
	ALARM(S)	
	Display warnings overview	
	Display warnings - Level 1	
	Display warnings - Level 2	
	Display warnings - Level 3	
	Display warnings - Level 4	8-8
	SYMPTOM(S)	
		0.40
	Engine symptoms	
	Transmission symptoms	
	Hydraulic symptoms	
	Hitch symptoms	
	Brake symptoms	
	Cab environment symptoms	
	Electrical power system symptoms	. 8-16
a	SPECIFICATIONS	
J	Engine specifications	9-1

Power trai	in specifications	9-2
Operating	speeds - Wheeled tractors	9-6
	speeds - SmartTrax™ tractors	
	mensions and shipping weight - Wheeled tractors	
	mensions and shipping weight - SmartTrax™ tractors	
	operating weight	
10 ACCES	SSORIES	
Farming s	system displays	10-1
Rear view	mirrors	10-2
	tank mounting	
Loader co	nnection and operation	10-6
General a	ccessories	10-7
11 FORMS	S AND DECLARATIONS	
Delivery re	eport - owner copy	11-1
	eport - dealer copy	
•	ce - owner copy	
	ce - owner copy	
	1 /	

1 - GENERAL INFORMATION

Note to the owner

This manual contains important information about the safe operation, adjustment and routine maintenance of your T8. or T8. **SmartTrax™** series tractor. The manual is divided into 10 chapters as outlined in the table of contents. Refer to the index at the end of this manual for locating specific items about your tractor.


Do NOT operate or permit anyone to operate or service this machine until you or the other persons have read this manual. Use only trained operators who have demonstrated the ability to operate and service this machine correctly and safely.

Tractors equipped with rear tracks

On SmartTrax[™] models, refer to the information starting on page Operating speeds - SmartTrax[™] tractors for transport speed weight limitations.

This Operator's Manual is to be stored in the manual compartment behind the operator's seat in the vehicle. Make sure this manual is in good condition. Contact your dealer to obtain additional manuals.

Your NEW HOLLAND dealer will instruct you in the general operation of your new equipment. Your dealer's staff of factory-trained service technicians will be glad to answer any questions that may arise regarding the operation of your machine. They will also provide any after-sales service you may need, and genuine NEW HOLLAND parts, your guarantee of quality and match.

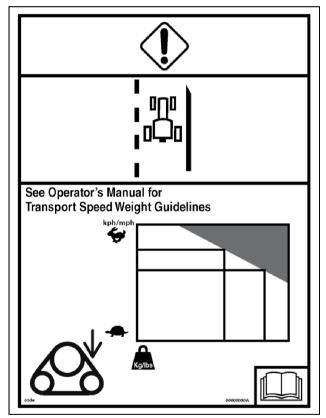

RAIL14TR03870BA

Engine tampering

The fuel system and engine on your machine are designed and built to government emissions standards. Tampering by dealers, customers, operators, and users is strictly prohibited by law.

Failure to comply could result in government fines, rework charges, invalid warranty, legal action, and possible confiscation of the machine until rework to original condition is completed. Engine service and/or repairs must be done by a certified technician only!

Tractor intended use

T8. or T8. **SmartTrax™** series tractors, with standard equipment and authorized attachments, are intended to be used for customary farming, land leveling and related agriculture operations (intended use). Installation of utility (dozer) blades, tile plows, or push bars on the tractor is not recommended. Any tractor damage resulting from the installation and/or use of such equipment is not covered by the tractor warranty.

Consult an authorized dealer or CNH Industrial America LLC on changes, additions or modifications that can be required for this machine to comply with various regulations and safety requirements. Unauthorized modifications will cause serious injury or death. Anyone making such unauthorized modifications is responsible for the consequences.

The tractor is not designed for light/heavy forestry applications; usage is prohibited for forestry applications.

Do not use this machine for any purpose or in any manner other than as described in the manual, decals, or other product safety information provided with the machine. These materials define the machine's intended use.

Use in any other way is considered as contrary to the intended use. The manufacture accepts no liability for any damage or injury resulting from this misuse and these risks must be born solely by the user.

Electro-magnetic compatibility (EMC)

Interference may arise as a result of add-on equipment that may not necessarily meet the required standards. As such interference can result in serious malfunction of the unit and/or create unsafe situations, you must observe the following:

- The maximum power of emission equipment (radio, telephones, etc.) must not exceed the limits imposed by the national authorities of the country where you use the machine
- The electro-magnetic field generated by the add-on system should not exceed **24 V/m** at any time and at any location in the proximity of electronic components
- The add-on equipment must not interfere with the functioning of the on board electronics

Failure to comply with these rules will render the NEW HOLLAND warranty null and void.

Thank you so much for reading. Please click the "Buy Now!" button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email: ebooklibonline@outlook.com