

JX95 HC Tractor

Operator's Manual Supplement

84134834



HIGH CLEARANCE TRACTOR


JX95 HC

SPECIFICATION AND DATA

The specifications on the following pages are given for your information and guidance. For further information concerning the tractor, please consult your authorized dealer.

DIMENSIONS OF 2WD MODELS WITH STANDARD TIRES

Tire Combinations	JX95 HC
FRONT	7.50-18
REAR	13.6/12-R38

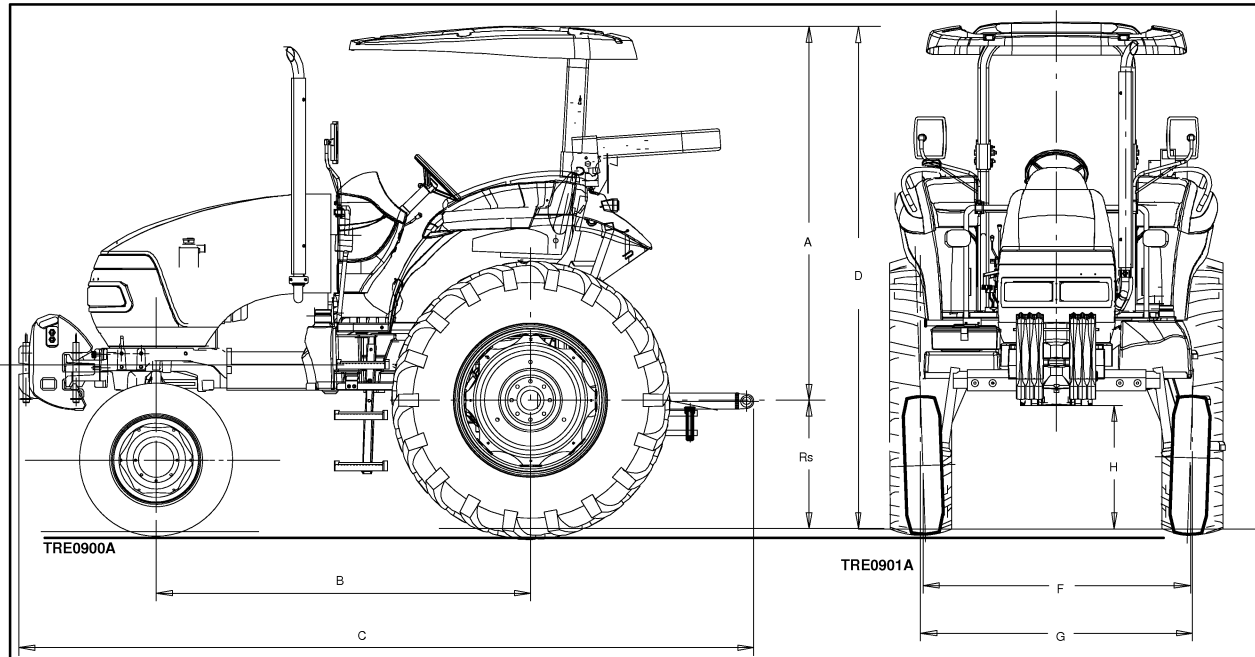


1

Dimensions mm (in)		JX95 HC
Tire radius under load (Rs)		740 (29.13)
A	ROPS	2150 (84.65)
B		2168 (85.35)
C		4172 (164.25)
D (ROPS)		$A_{rops} + R_s$
F (front)		1524-2032 (60-80)
G (rear)		1503-2021 (59.17-79.57)
H		695 (27.36)

DIMENSIONS OF 4WD MODELS WITH STANDARD TIRES

Tire Combinations	JX95 HC
FRONT	13.6/12-R38
REAR	13.6/12-R38

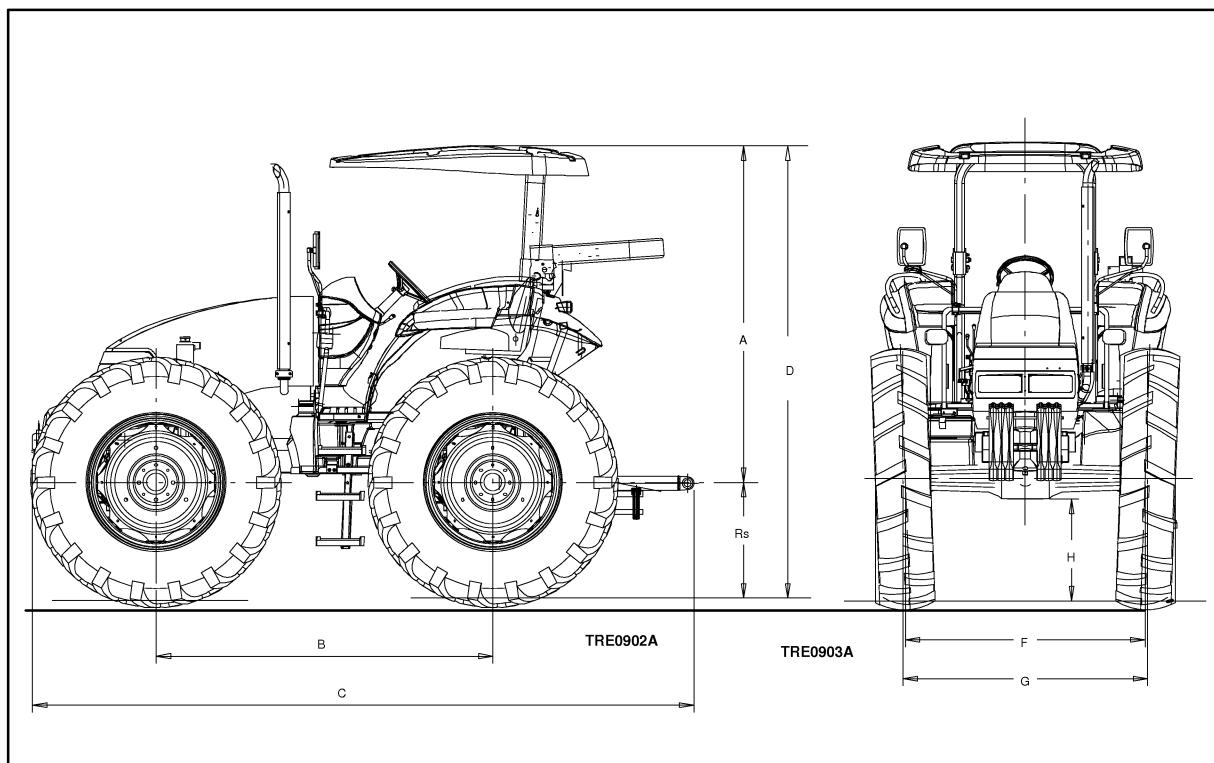

2

Dimensions mm (in)		JX95 HC
Tire radius under load (Rs)		740 (29.13)
A	ROPS	2150 (84.65)
B		2112 (83.15)
C		4182 (164.25)
D (ROPS)		$A_{rops} + R_s$
F (front)		1540–2054 (60.63–80.87)
G (rear)		1503–2021 (59.17–79.57)
H		695 (27.36)



Our support email:

ebooklibonline@outlook.com