

m-3490

NEW HOLLAND

Vac Bagger

OPERATOR'S MANUAL

For LS Yard Tractors with
42" and 48" Mowers
Model No.
715703001—T1N0001 & Up



NEW HOLLAND

SERVICE

Contents

	Page
Introduction	2
Safety	3
Safety Decals	3
Setup	4
Loose Parts	4
Preliminary Preparation	5
Setting Up the Bagger and Mower	6
Installing the Vac-Bagger	9
Removing the Bagger	12
Operation	15
Using the Full Bag Tester	15
Emptying the Grass Bags	16
Adjusting the Height-of-Cut	16
Clearing Obstructions from the Bagger	16
Bagging Tips	17
Maintenance	18
Recommended Maintenance Schedule	18
Cleaning the Bagger	18
Inspecting the Bagger	18
Caring for the Grass Bags	19
Storage	19

Introduction

Thank you for purchasing a New Holland product.

All of us at New Holland want you to be completely satisfied with your new product, so feel free to contact your local Authorized Service Dealer for help with service, genuine replacement parts, or other information you may require.

Whenever you contact your Authorized Service Dealer or the factory, always know the model and serial numbers of your product. These numbers will help the Service Dealer or Service Representative provide exact information about your specific product. You will find the model and serial number plate at the location shown in Figure 1.

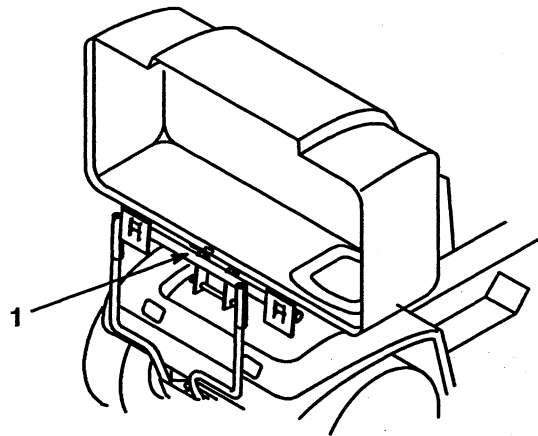



Figure 1

1. Model and serial number plate

For your convenience, write the product model and serial numbers in the space below.

 NEW HOLLAND	
MODEL NO.	SERIAL NO.
COMPONENT	
NEW HOLLAND NORTH AMERICA, INC.	
<small>MADE IN U.S.A.</small>	

Read this manual carefully to learn how to operate and maintain your product correctly. Reading this manual will help you and others avoid personal injury and damage to the product. Although we design, produce and market safe, state-of-the-art products, you are responsible for using the product properly and safely. You are also responsible for training persons, who you allow to use the product, about safe operation.

The warning system in this manual identifies potential hazards and has special safety messages that help you and others avoid personal injury, even death. ***Danger***, ***Warning***, and ***Caution*** are signal words used to identify the level of hazard. However, regardless of the hazard, be extremely careful.

Danger signals an extreme hazard that will cause serious injury or death if the recommended precautions are not followed.

Warning signals a hazard that may cause serious injury or death if the recommended precautions are not followed.

Caution signals a hazard that may cause minor or moderate injury if the recommended precautions are not followed.

Two other words are also used to highlight information. **Important** calls attention to special mechanical information, and **Note** emphasizes general information worthy of special attention.

Safety

Safety Decals



Safety decals and instructions are easily visible to the operator and are located near any area of potential danger. Replace any decal that is damaged or lost.




TR92D7113




Molded into the Belt Cover



Molded into the Belt Cover

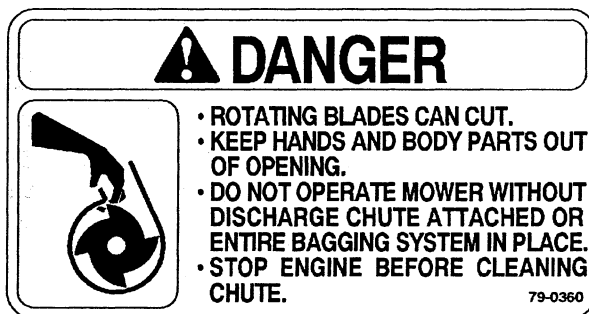

Molded into the Blower and Belt Cover

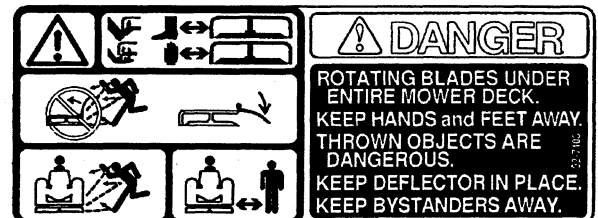

TR92D7108

Setup

Important Save all parts and hardware that you remove from the mower while installing the vac bagger for use if you remove the bagger.

Loose Parts

Note: Use the chart below to identify parts used for assembly.

Description	Qty.	Use
Double Pulley, 3-1/4 and 4-1/2 in. (42 in. mower)	1	Install the blower drive pulley
Double Pulley, 3-3/4 and 5-1/4 in. (48 in. mower)	1	
Grass baffle with 1 hole (42 in. mower)	1	Install the grass baffle (42 in. mower)
Bolt, 3/8 x 1 in.	1	
Locknut, 3/8 in.	1	
Grass baffle with 2 holes (48 in. mower)	1	Install the grass baffle (48 in. mower)
Bolt, 3/8 x 1 in.	2	
Locknut, 3/8 in.	2	
Pivot support	1	Install the blower pivot support on the mower
Bolt, 5/16 x 3/4 in.	1	
Flange nut, 5/16 in.	1	
Blower assembly	1	Assemble the blower
Spring	1	
Bolt, #10 x 3/4 in.	1	
Washer, 7/32 in.	2	
Nut, #10	2	
Latch, long (48 in. mower only)	1	
Latch, short (42 in. mower only)	1	
Bolt, 1/4 x 3/4 in.	1	
Washer, 1/4 in.	1	
Locknut, 1/4 in.	1	
Spring	1	Install between footrest and mower
Chain	1	
Carriage bolt, 5/16 x 1-1/4 in.	1	
Washer, 5/16 in.	3	
Locknut, 5/16 in.	1	

Description	Qty.	Use
Bagger cover	1	Assemble the bagger
Indicator rod	1	
Handle	1	
Jam nut, 1/4 in.	1	
Clips	2	
Pan-head bolt, 1/4 x 5/8 in.	2	
Locknut, 1/4 in.	2	
Frame hinge assembly	1	
Bolt, 1/4 x 3/4 in.	2	
Locknut, 1/4 in.	2	
Belt cover (42 in. mower)	1	Install the belt cover
Bracket (42 in. mower)	1	
Belt cover (48 in. mower)	1	
Bolt, 1/4 x 1/2 in.	5	
Locknut, 1/4 in.	7	
Blower belt cover	1	
Bolt, 1/4 x 5/8 in.	2	
Bagger mount	1	Install bagger mount to tractor
Bolt, 3/8 x 1-3/4 in.	2	
Locknut, 3/8 in.	2	
Spacer	2	
Hairpin cotter	1	
Bag	2	Mount into bagger cover
Discharge tube	1	Assemble knob to discharge chute
Knob	1	
Washer, 1/4 in.	1	
Bolt, 1/4 x 3/4 in.	1	

Preliminary Preparation

1. Park the tractor and mower on a level surface, disengage the PTO, set the parking brake, stop the engine, and remove the ignition key.
2. Remove the spark plug wire(s) from the spark plug(s).
3. Lower the mower to its lowest position and remove the mower from the tractor. Refer to the Mower Operator's Manual for removal instructions.
4. Thoroughly clean the mower. All debris must be removed to ensure that parts will fit the mower properly.

Thank you so much for reading.
Please click the “Buy Now!”
button below to download the
complete manual.



After you pay.

You can download the most
perfect and complete manual in
the world immediately.

Our support email:

ebooklibonline@outlook.com