



# Service Repair Manual

## **Models**

# D10 TRACK-TYPE TRACTOR

---

Product: TRACK-TYPE TRACTOR

Model: D10 TRACK-TYPE TRACTOR 84W

Configuration: D10 TRACTOR 84W00001-00645 (MACHINE) POWERED BY D348 ENGINE

## Disassembly and Assembly D10 TRACTOR POWER TRAIN

Media Number -SEN7491-02


Publication Date -01/07/1981

Date Updated -15/07/2005

SEN74910016

### Final Drive

SMCS - 4050-12; 4050-15; 4050-16; 4050-11

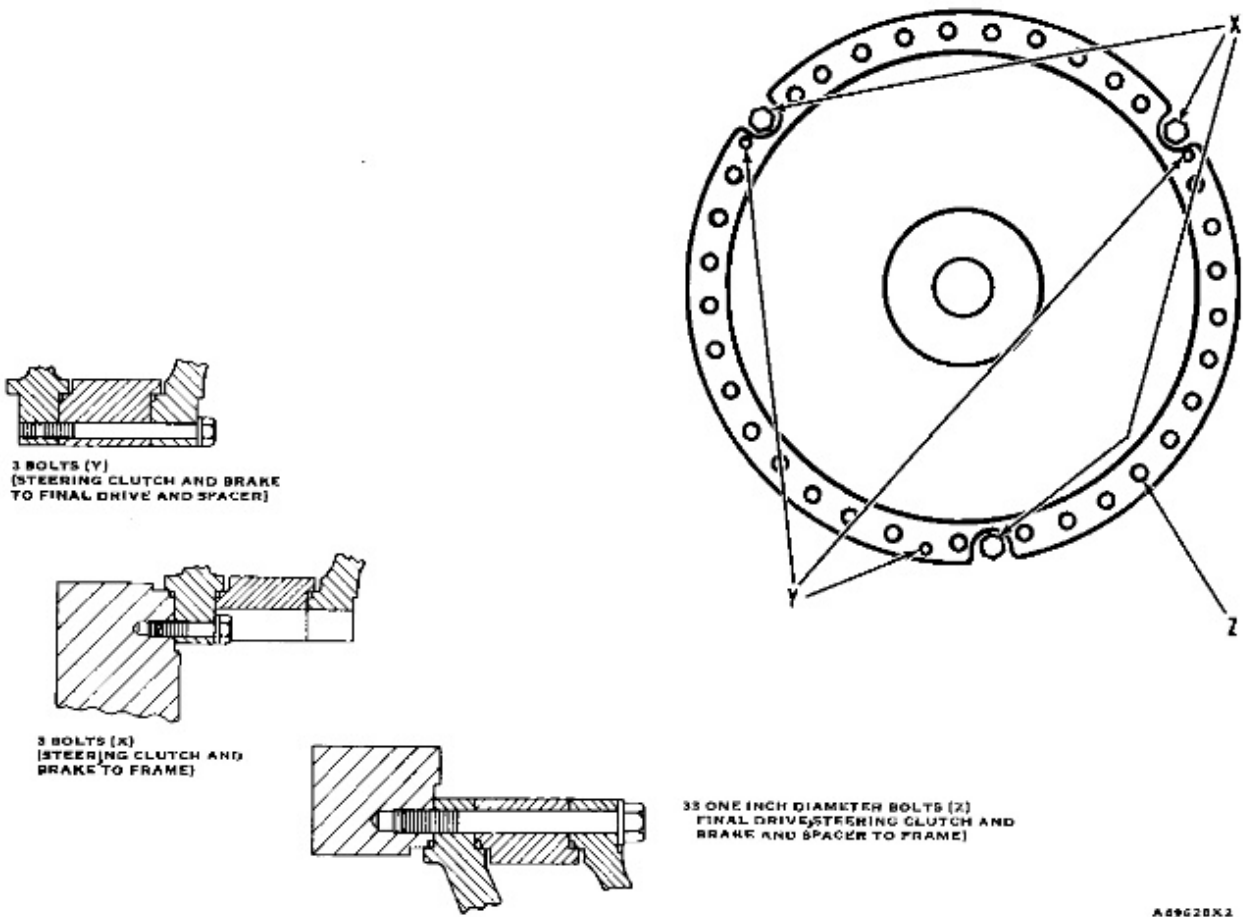


### Remove Final Drive

Tools Needed		A	B
5P7395	Axle Installer	1	
5P7281	Adapter		1
7F4283	Bolt		2
5P7284	Plate Loop		1
5P7279	Adjustable Hook		1
5P8622	Shackle Assembly		1
2H3745	Bolt		4
3K5234	Washer		4
7F5227	Bolt		2


start by:

**a) separation of track**


**NOTE:** The final drive planet carriers, hub and ring gear can be removed in chassis. See REMOVE FINAL DRIVE PLANET CARRIERS, HUB AND RING GEAR (in chassis).

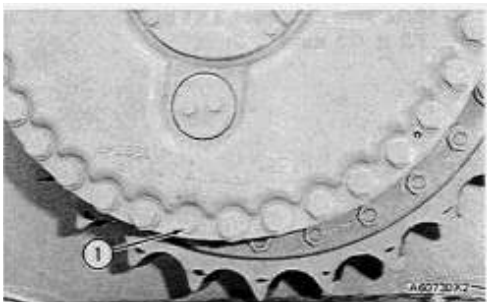


**1.** Turn the final drive until drain plug (1) is on the bottom as shown. Remove drain plug (1) and drain the oil from the final drive.

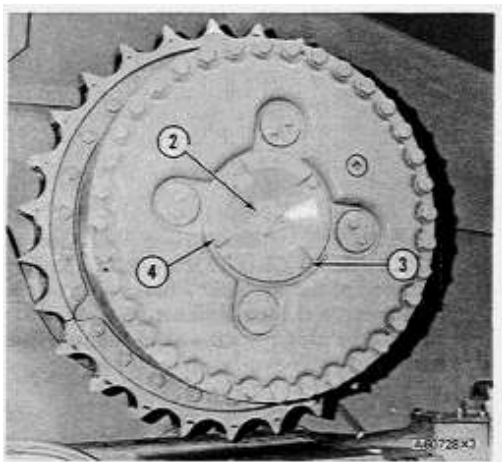

**2.** Remove three bolts (2) from the center of cover (4). Remove four bolts (3) and cover (4) from the final drive. Remove the O-ring seal from the cover.

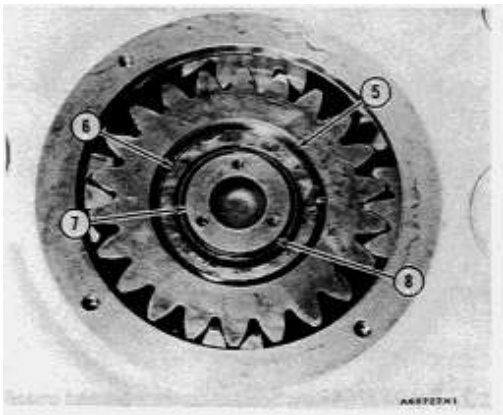

3. Remove spiral lockring (5), ring (6) and retainer (7). Remove O-ring seal (8) from retainer (7).

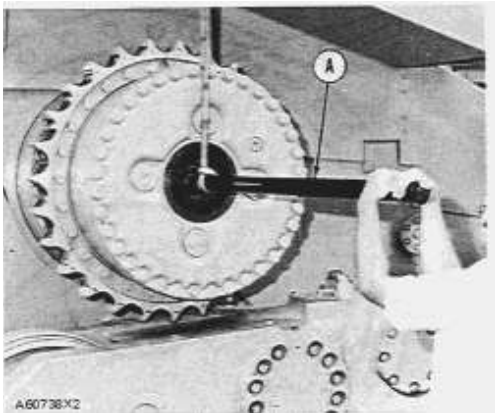


4. Install tool (A) and fasten a hoist as shown. Remove the outer axle. The weight of the outer axle is 85 lb. (39 kg).




**WARNING**

**Make sure that the short support of tooling (B) is on bottom and the long support is on the top when distances (M) and (N) are made.**

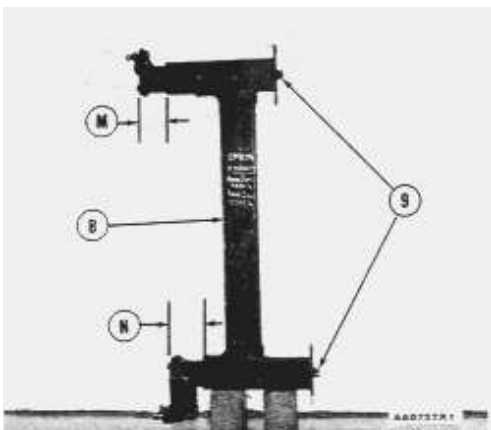

5. Make an adjustment to bolts (9) on tooling (B) so distance (M) is 5 in. (12.70 cm) and distance (N) is 5.5 in. (13.97 cm).

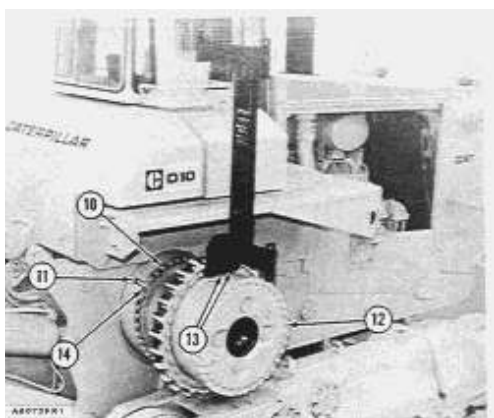

6. Remove two bolts from the sprocket segments. Fasten a hoist and install tooling (B). Make an adjustment to bolts (13) until the bolts are against the final drive hub.
7. Remove thirty-three one inch diameter bolts (10) that hold the final drive, steering clutch, and brake and spacer to the frame.
8. Remove three 5/8" bolts (14) that hold the steering clutch and brake to the final drive and spacer.



## WARNING

**Do not remove the three 5/8 in. diameter bolts (11). Bolts (11) hold the steering clutch and brake to the frame.**

---

9. Remove final drive (12) from the frame. The weight is 4450 lb. (2003 kg).
- 

## NOTICE

**Make sure the final drive is level when it is removed to prevent damage to the bladder.**

---



## WARNING

**Remove tooling (B) from the final drive before the hoist is disconnected from tooling (B).**

---

## Install Final Drive

Thank you so much for reading.  
Please click the “Buy Now!”  
button below to download the  
complete manual.



After you pay.

You can download the most  
perfect and complete manual in  
the world immediately.

Our support email:

[ebooklibonline@outlook.com](mailto:ebooklibonline@outlook.com)