



Service Repair Manual

Models

W330B MH Excavator

Product: WHEELED EXCAVATOR

Model: W330B WHEELED EXCAVATOR AME

Configuration: W330B MH Excavator AME00001-UP (MACHINE) POWERED BY 3306 Engine

Disassembly and Assembly 3304B and 3306B Engines for Caterpillar Built Machines

Media Number -SEN5598-09

Publication Date -01/01/2013

Date Updated -25/01/2013

i00930839

Automatic Timing Advance - Remove

SMCS - 1272-011

Removal Procedure

Table 1

| Required Tools | | | |
|----------------|-------------|----------------------|-----|
| Tool | Part Number | Part Description | Qty |
| A | 5P-7307 | Engine Turning Tool | 1 |
| B | 0T-0065 | Bolt | 1 |
| C | 9S-9155 | Spacer | 1 |
| | 8S-2264 | Pump Impeller Puller | 2 |
| | 0T-0513 | Bolt | 2 |
| | 5P-1075 | Hard Washer | 2 |

Start By:

- A. Remove the front housing. Refer to Disassembly and Assembly, "Front Housing - Remove".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

1. Follow the procedure in Steps 3 and 4 in order to time the fuel injection pump when the front cover is removed. Follow the procedure in Steps 6 and 7 in order to time the fuel injection pump when the front cover is installed.

Note: The No. 1 piston should be at the top center position on the compression stroke at the start of all timing procedures.

Note: The engine is seen from the flywheel end when the direction of the crankshaft rotation is given.

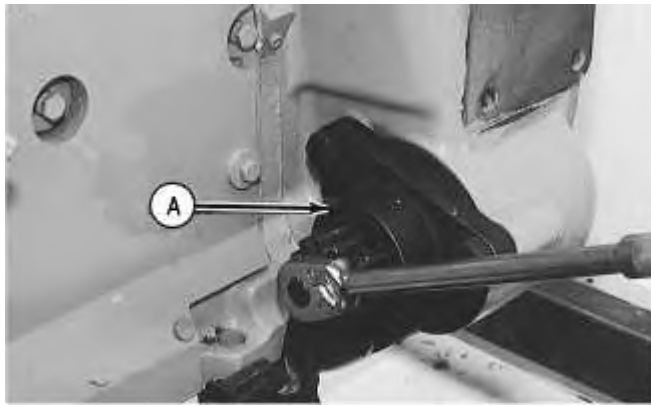


Illustration 1

g00474593

2. Remove the electric starting motor and install Tool (A) .

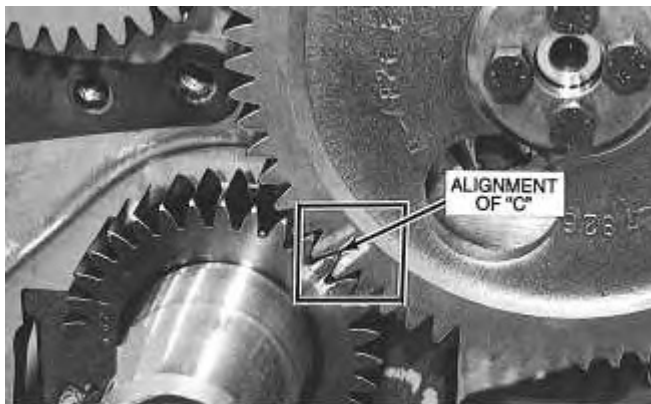


Illustration 2

g00474592

3. Turn the crankshaft counterclockwise until the "C" on the crankshaft gear and the "C" on the camshaft gear are in alignment.
-

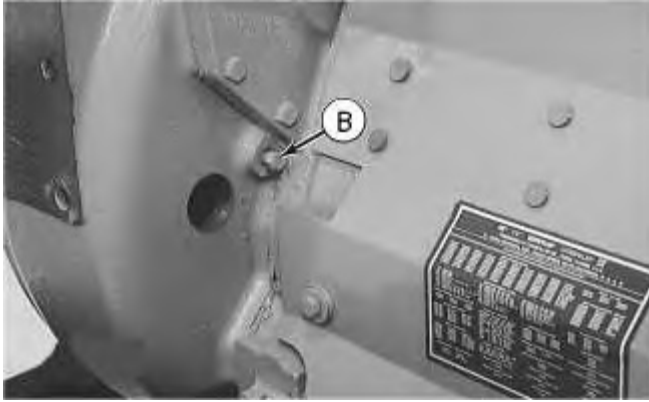


Illustration 3

g00474594

4. Remove two plugs and install Tool (B) in the flywheel housing. The large plug hole is for viewing.
5. To find the top center compression stroke for the No. 1 piston, use Tool (A) in order to turn the flywheel clockwise for approximately 30 degrees. This procedure should be used to remove all of the end play from the timing gears.
6. Use Tool (A) in order to turn the flywheel counterclockwise in the direction of the engine rotation until Tool (B) can be installed in the flywheel. The piston is at the top center position.

Note: If you go past the bolt hole, you must start the procedure again.

Note: Remove the breather assembly from the valve mechanism cover. The piston is at the top center position on the compression stroke when the inlet valve is closed and the exhaust valve is closed for the No. 1 cylinder. You must be able to move the rocker arms up and down with your hand.

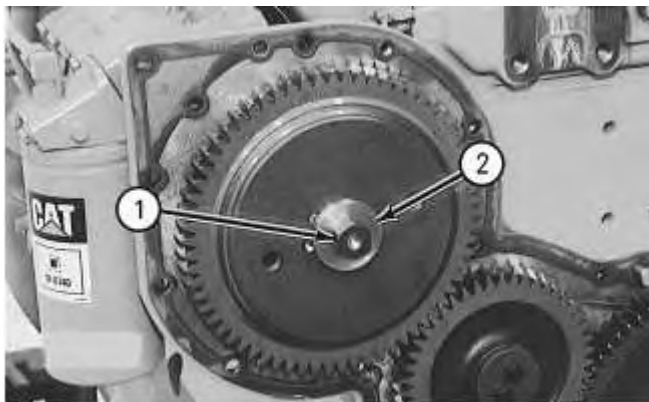


Illustration 4

g00474595

7. Remove bolt (1) and washer (2) that secures the automatic timing advance.

NOTICE

The automatic timing advance must have support during removal in order to help prevent damage to components.

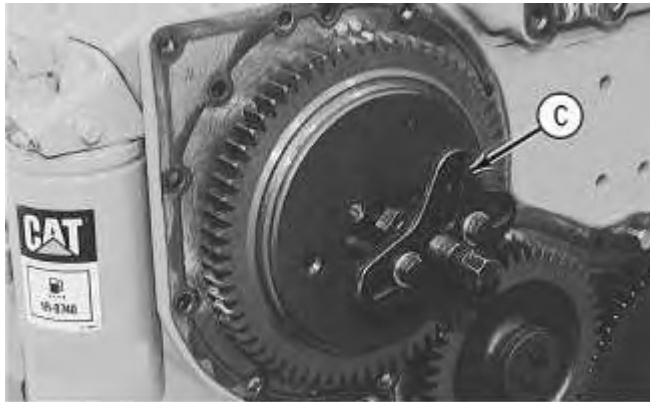


Illustration 5

g00474596

8. Install bolt (1) and leave a 6.35 mm (.250 inch) gap. Install Tool (C), as shown. Tighten the stud in order to loosen the fuel pump drive gear from the taper on the fuel injection pump camshaft.
9. Remove Tool (C) and bolt (1). Remove the automatic timing advance.

Thank you so much for reading.
Please click the “Buy Now!”
button below to download the
complete manual.



After you pay.

You can download the most
perfect and complete manual in
the world immediately.

Our support email:

ebooklibonline@outlook.com