


Document Title: Engine, description	Function Group: 200	Information Type: Service Information	Date: 2014/8/7 0
Profile: EXC, EC240B LR [GB]			

[Go back to Index Page](#)

Engine, description


The engine is a 6-cylinder, 4-stroke, direct injected, turbocharged, air to air aftercooled, water cooled assembly with a cast iron block and cylinder head.

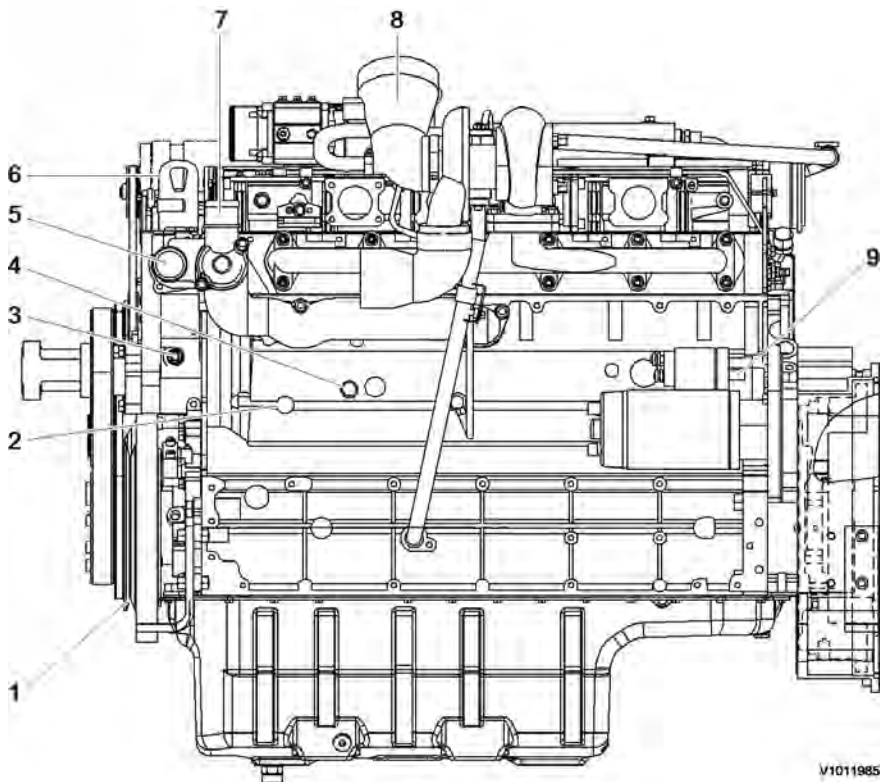

V1011985

Figure 1
Engine, start motor side view


1. Air conditioner compressor pulley
2. Engine oil pressure sensor port
3. Make up line
4. Coolant temperature sensor port
5. Water inlet
6. Lifting lug
7. Water outlet
8. Air inlet
9. Start motor

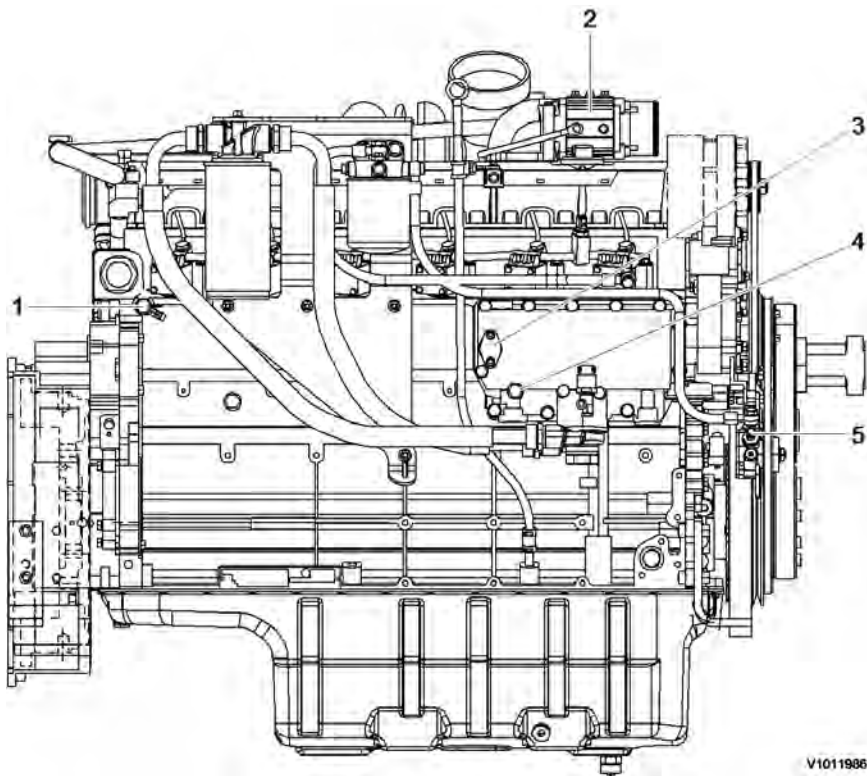

V1011986

Figure 2
Engine, air heater side view

1. Fuel return line
2. Air heater
3. Coolant preheater port
4. Coolant filter supply
5. Fuel suction line

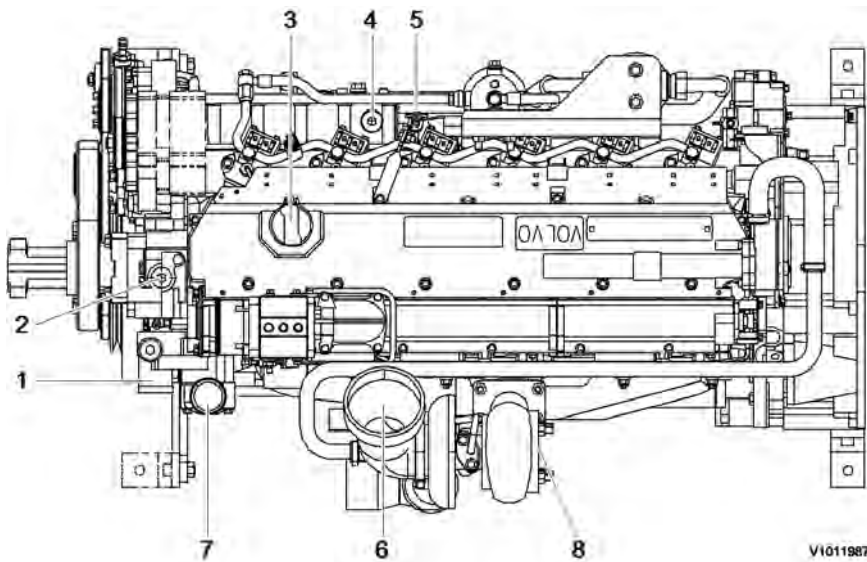

V1011987

Figure 3
Engine, top view

1. Water inlet
2. Return from heater
3. Engine oil filler
4. Supply to heater

5. Oil dipstick
6. Air inlet
7. Water outlet
8. Exhaust line


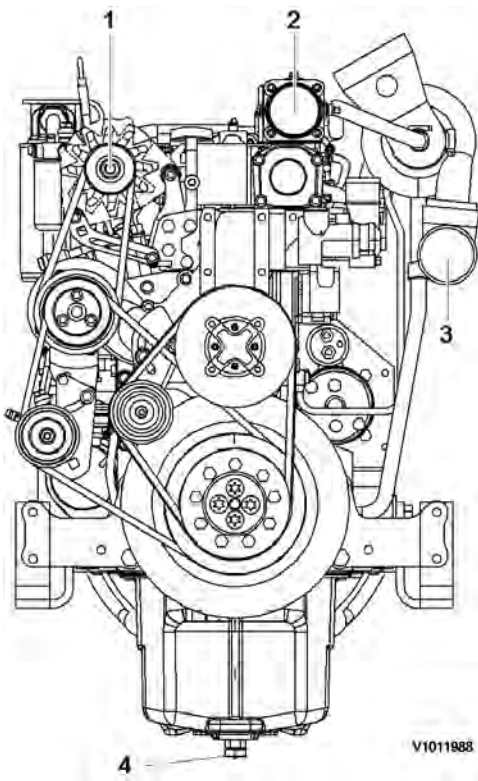


Figure 4
Engine, front view

1. Alternator
2. From charge air cooler
3. To charge air cooler
4. Oil drain valve

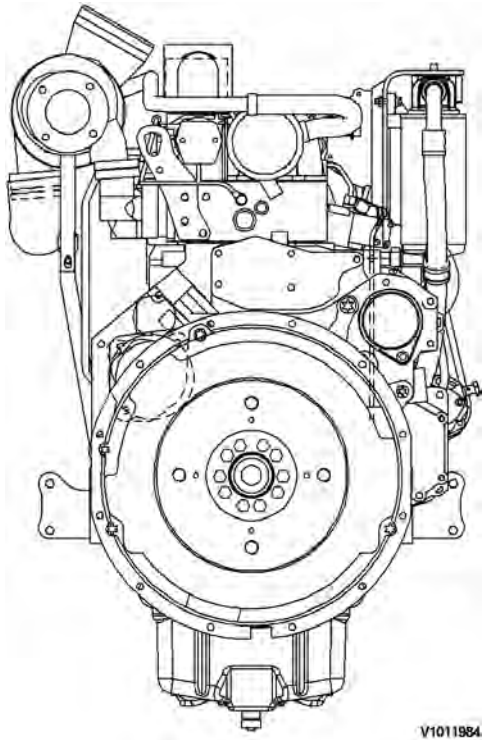

V1011984

Figure 5
Engine, rear view

Document Title: Engine, description	Function Group: 200	Information Type: Service Information	Date: 2014/8/7 0
Profile: EXC, EC240B LR [GB]			

[Go back to Index Page](#)

Engine, description

D7E -Tier 3 / Tier 3 base tier 2

The D7E configuration is a four stroke, straight six cylinder, turbocharged, direct injected diesel engine with charge air cooling and wet, replaceable cylinder liners.

The D7E engine uses a Common Rail Fuel System controlled by the engine electronic control (E-ECU) software.

Electronically controlled IEGR (Internal Exhaust Gas Recirculation) reduces NO_x formation and lowers emissions without the need for exhaust after treatment (Only applied Tier 3 engine)

Volvo's latest engine management system, EMS 2 is used to control all engine electronic functions.

The cylinders are numbered consecutively beginning at the flywheel end. Engine rotational direction is counterclockwise as seen from the flywheel end.

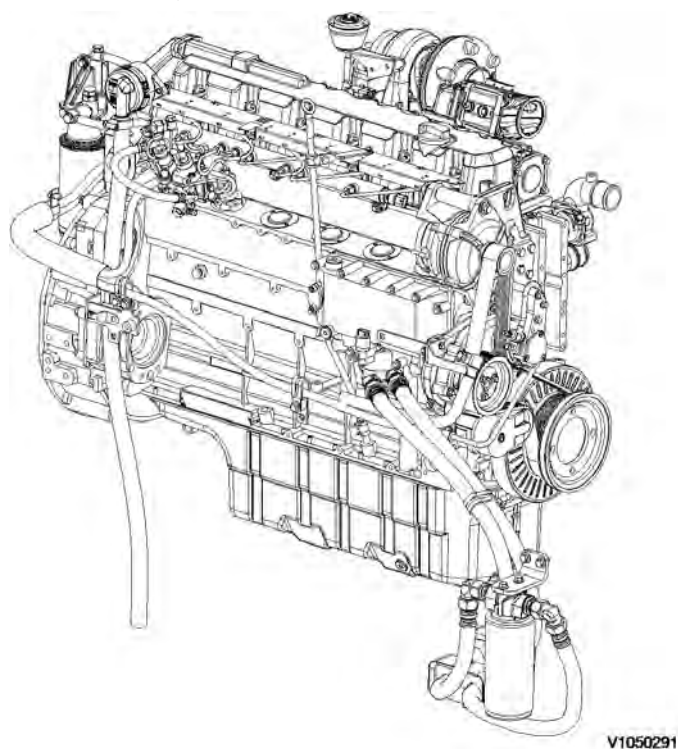


Figure 1
Engine, D7E

Document Title: Internal Exhaust Gas Recirculation description	Function Group: 214	Information Type: Service Information	Date: 2014/8/7 0
Profile: EXC, EC240B LR [GB]			

Internal Exhaust Gas Recirculation (IEGR), description

A system for IEGR (**I**nternal **E**xhaust **G**as **R**ecirculation) is used as part of V-ACT (Volvo Advanced Combustion Technology). On D6E and D7E this takes place by an IEGR-opening piston, controlled by the lubrication oil's system pressure, acting on the exhaust rocker arm which enables a second opening of the exhaust valves. When activated, the secondary piston will give a limited valve opening of the exhaust valves during the induction phase, which leads exhausts back into the cylinder.

Included components

IEGR-unit

The hydraulic mechanism is housed in two interconnected IEGR-units, located on the rocker arm holders. Lubrication oil is routed from the cylinder head via the solenoid valve to the high-pressure channel in the IEGR-unit through a channel in one of the rocker arm holders.

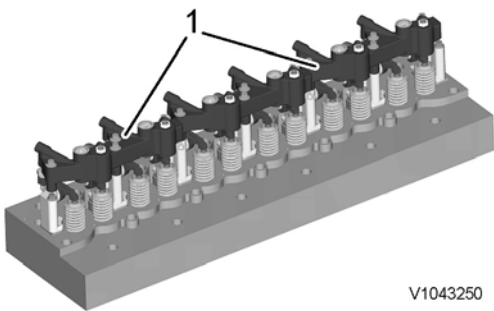


Figure 1

1. IEGR-unit

Solenoid valve

The solenoid valve is located in the cylinder head on the flywheel side and is activated by the EECU via the control system EMS 2. When IEGR is not activated, the solenoid valve is closed and no oil flow is allowed into the IEGR-unit. At activation of IEGR, the solenoid valve opens the channel from the engine's lubrication system to the IEGR-unit.

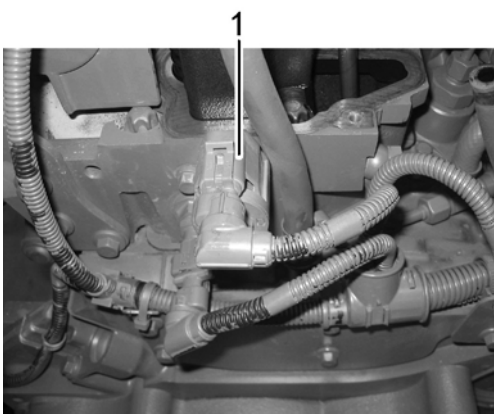


Figure 2

1. Solenoid valve

Control valve

The control valve is located in the IEGR-unit between the high-pressure circuit and low-pressure circuit. When the low-pressure circuit is supplied from the lubrication oil system, the control valve is lifted and closes the high-pressure circuit. The ball in the control valve enables filling of the high-pressure circuit when IEGR is activated. The lubrication oil is drained through the control valve.

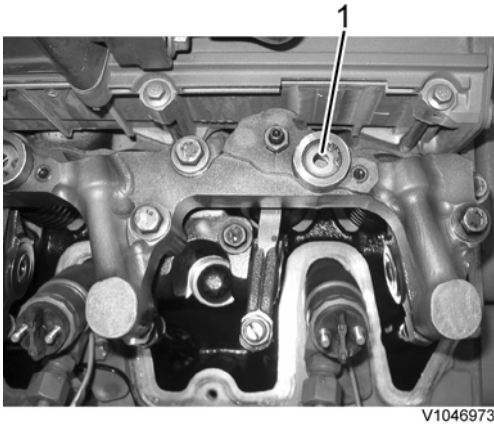


Figure 3

1. Control valve

Main piston

The main piston is acted on by the adjusting screw on the inlet valve's rocker arm, and affects the oil pressure in the IEGR-unit's high-pressure channel. At the end of the IEGR-phase, a pressure of 100 bar is generated in the high-pressure circuit.


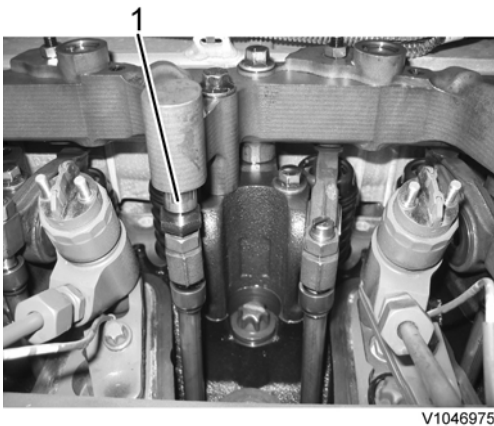


Figure 4

1. Main piston

Servo piston

The servo piston is activated by the hydraulic pressure from the main piston via a channel in the IEGR-unit when the IEGR-function is active/on (solenoid valve in open position). Then the servo piston opens the exhaust valves via the rocker arm an extra time during the induction stroke.

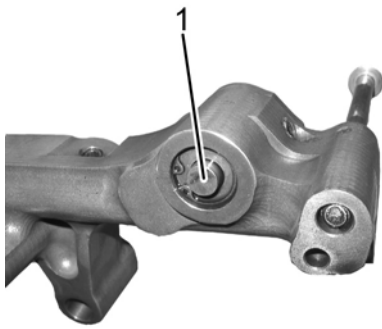

V1046976

Figure 5

1. Servo piston


Function

IEGR is activated by the system being supplied with full lubrication oil system pressure via the solenoid valve. The solenoid valve is activated by the E-ECU.

The control valve closes the high-pressure circuit and the ball inside the valve enables filling of the system.

With the same movement as the inlet valve's rocker arm opens the valve, the main piston is forced upward. The pressure in the IEGR-unit's high-pressure channel (up to 100 bar) overcomes the spring force in the servo piston. The servo piston forces down the rocker arm, which results in the exhaust valve being open for a short time at the end of the induction stroke.

Exhausts from the exhaust manifold are sucked into the cylinder by vacuum from the other cylinders. The breather hole between the low-pressure channel and the high-pressure channel in the IEGR-unit enables longer exhaust recirculation at high engine speed.

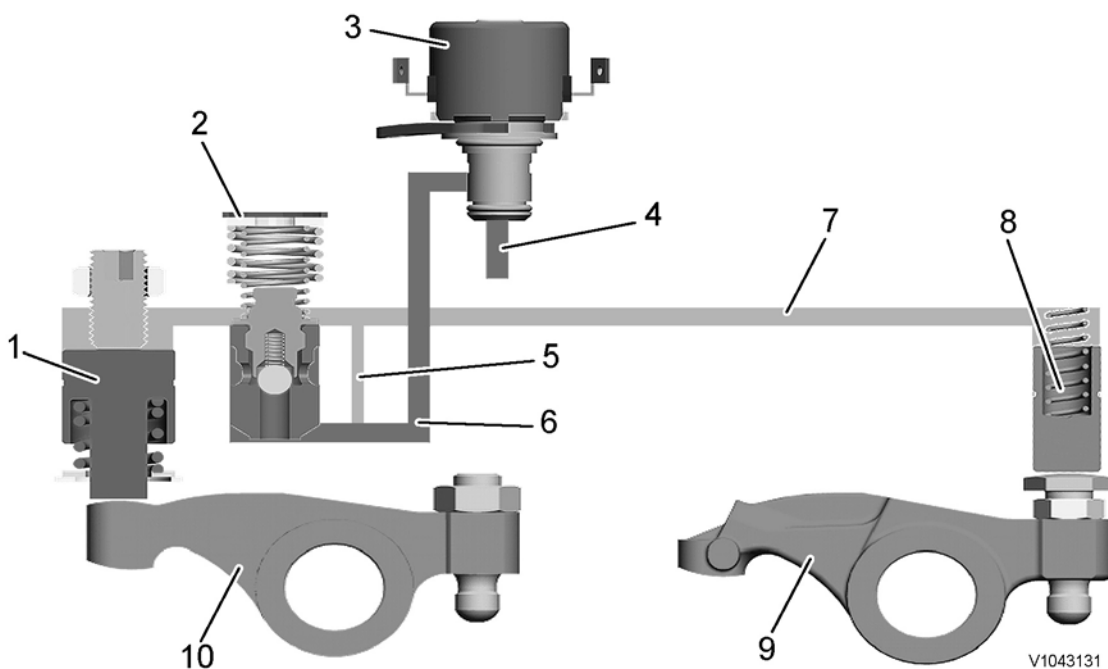

V1043131

Figure 6
IEGR-system (inactive)

1. Servo piston
2. Control valve
3. Solenoid valve
4. 2–5 Bar lubrication oil pressure
5. Breather hole
6. Oil channel, low-pressure

- 7. Oil channel, high-pressure
- 8. Main piston
- 9. Induction rocker arm
- 10. Exhaust rocker arm

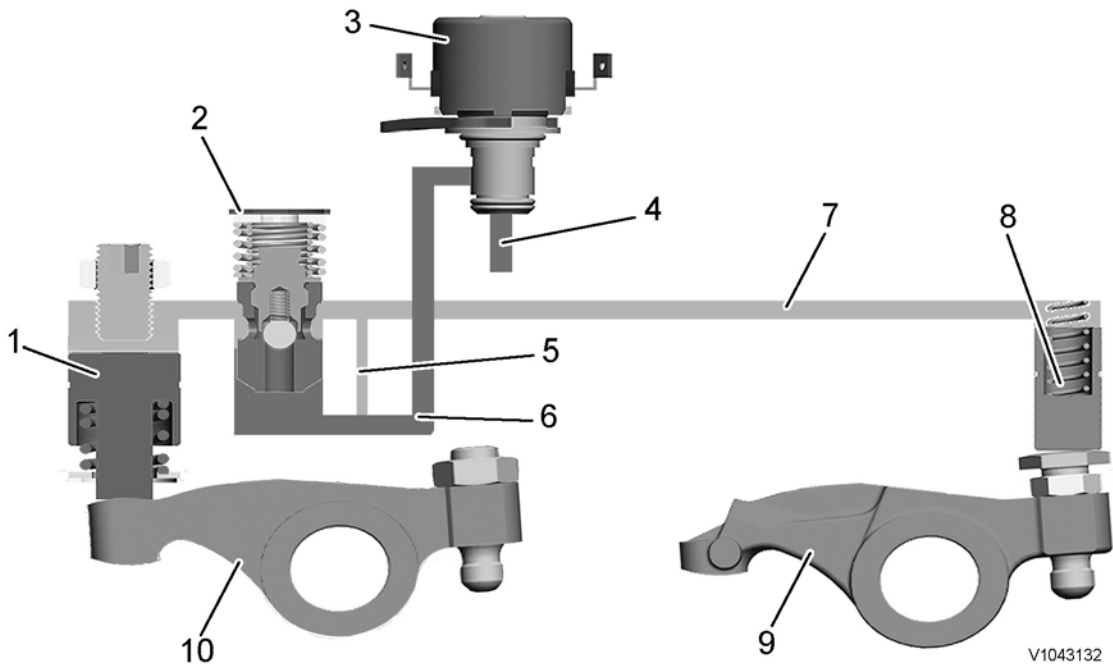


Figure 7
IEGR-system activated

- 1. Servo piston
- 2. Control valve
- 3. Solenoid valve
- 4. 2–5 Bar lubrication oil pressure
- 5. Breather hole
- 6. Oil channel, low-pressure
- 7. Oil channel, high-pressure
- 8. Main piston
- 9. Induction rocker arm
- 10. Exhaust rocker arm

Checking and adjusting

Checking and adjusting of the IEGR-opening piston's clearance against the exhaust rocker arm should be done in connection with checking and adjusting valves according to [214 Valves, adjusting](#).

Software

The function monitors the EGR valve for return of combustion gases and informs the operator if the function is not ensured or if there is a system malfunction.

The function is also used as input signal for Engine protection.

Document Title: Valves, adjusting	Function Group: 214	Information Type: Service Information	Date: 2014/8/7 0
Profile: EXC, EC240B LR [GB]			

[Go back to Index Page](#)

Valves, adjusting

The valve clearance must be checked and adjusted at specified intervals. To do this, the engine oil temperature must be between 20 °C (68 °F) and 80 °C (176 °F).

Valve clearance adjustment

Item	mm	inch
Inlet valve	0.3	0.012
Exhaust valve	0.5	0.020

Adjustment

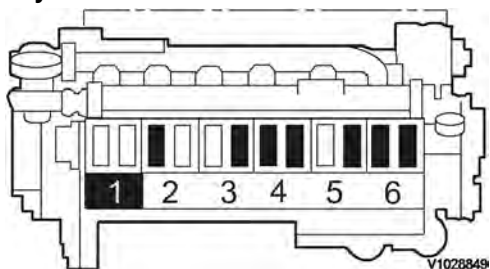


Figure 1
Valve clearance, adjustment

1. Remove rocker cover.
2. Turn crankshaft until both valves in cylinder 1 overlap (Exhaust valve about to close, inlet valve about to open).
3. Adjust clearance of valves marked in black in figure. Mark respective rocker arm with chalk to show that adjustment has been done.

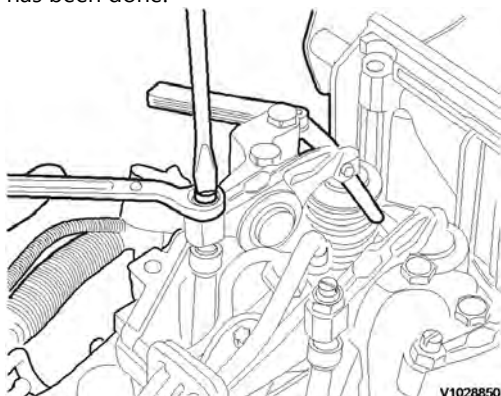


Figure 2
Lock nut, tightening

4. Tighten down the lock nut to 20 N·m (15 lbf·ft) check the adjustment again with a feeler gauge.

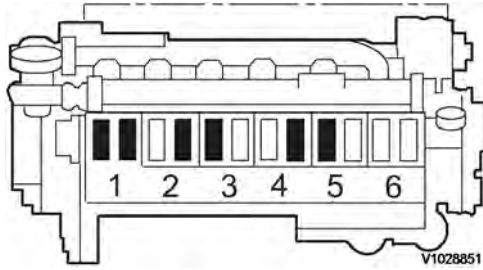


Figure 3

Valve clearance, adjustment

5. Turn crankshaft one full revolution (360°). Now adjust clearance of valves marked black in figure.
6. Install the valve cover together with a new gasket and tighten down the screws.

- Tightening torque: 9 N·m (6.6 lbf·ft)

Document Title: Valves, adjusting	Function Group: 214	Information Type: Service Information	Date: 2014/8/7 0
Profile: EXC, EC240B LR [GB]			

[Go back to Index Page](#)

Valves, adjusting

Op nbr 214-012

[9998681 Rotation tool](#)

[885812 Timing tool](#)



Risk of burns - stop the diesel engine and allow it to cool down before starting any work.

1. Place the machine in service position B. See [091 Service positions](#)
2. Open the engine hood.
3. Remove turbocharger inlet hose (1).

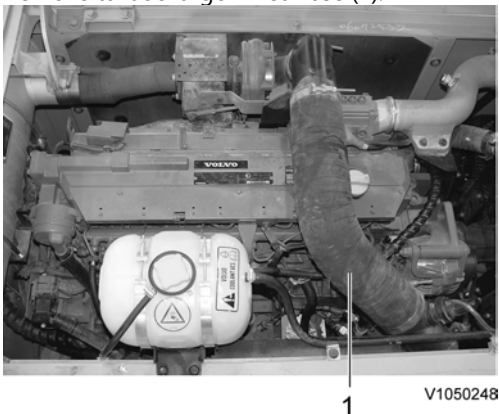


Figure 1

4. Remove dipstick gauge pipe mounting bracket (1).

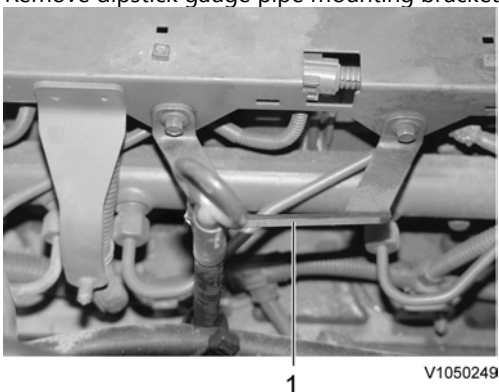


Figure 2

5. Remove crankcase ventilation duct (1).

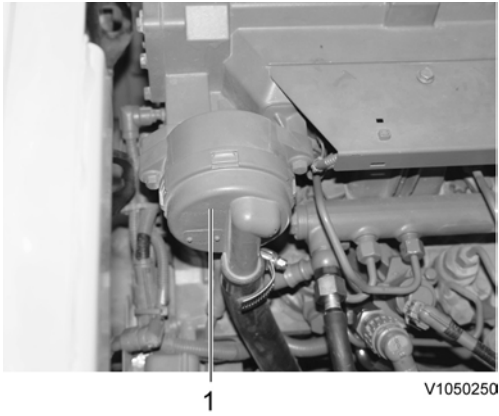


Figure 3

6. Remove cable bracket (1).

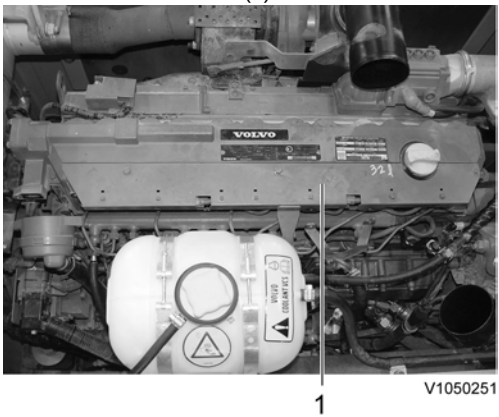


Figure 4

7. Remove engine intake sensor cover (1).

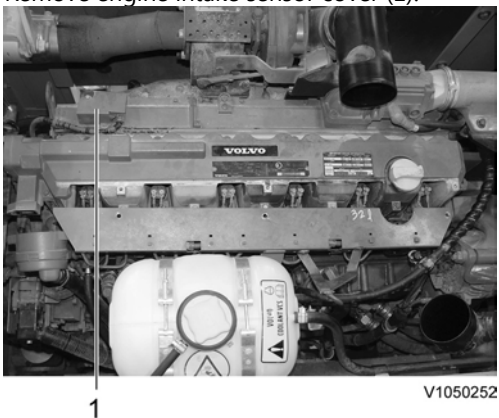


Figure 5

8. Disconnect engine intake sensor (1) and preheating coil terminal (2).

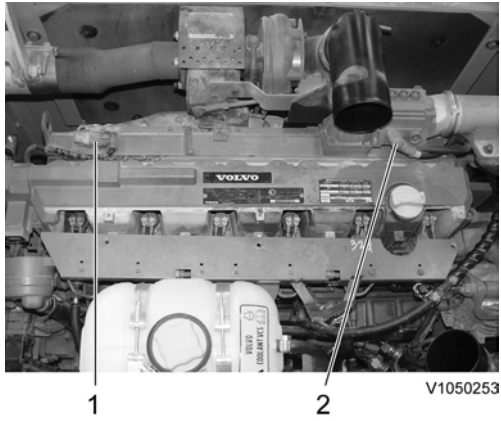


Figure 6

9. Remove dust seal (1) and then remove rocker arm cover (2).

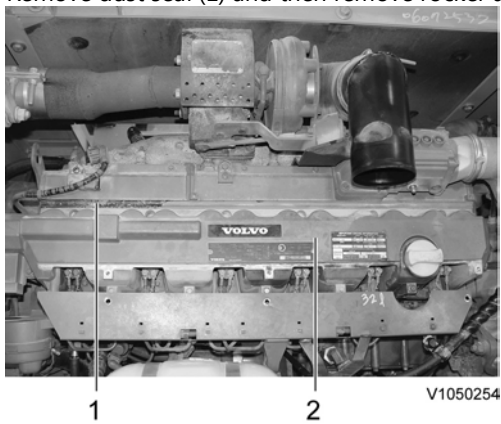


Figure 7

10. Open the side door on the right side of the machine.
11. Remove screws and put away two covers.

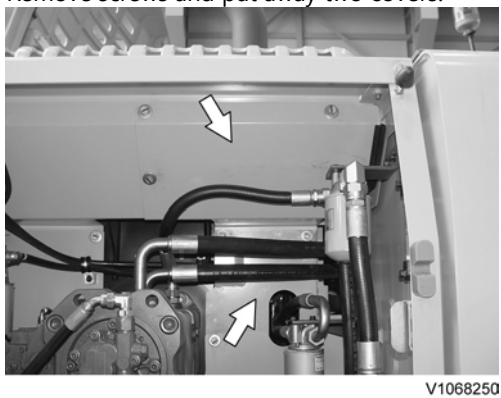


Figure 8

12. Remove the camshaft gear cover (1) and install turning gear (2).

NOTE!

The teeth of the turning gear must mesh fully with the teeth of the camshaft gear.

Buy Now



Our support email:

ebooklibonline@outlook.com