

NO 2 LAY-BY BOOM



OPERATORS MANUAL NO 2 LAY-BY BOOM

OMB25303 (01DEC65) English

OMB25303 (01DEC65)

LITHO IN THE U.S.A. ENGLISH



To the purchaser

Your new John Deere lay-by boom is efficient and dependable. It will give long and efficient service if given proper care and operation.

This Operator's Manual contains information on the proper operation, adjustment, and maintenance of your new lay-by boom.

When in need of parts, see your John Deere dealer. He will furnish genuine John Deere Parts and prompt and efficient service in the field or in the shop.

Right-hand and left-hand reference is determined by standing at the rear of the machine and facing the direction of travel.



Study this manual carefully. Keep it handy, in a safe place, for future reference.

JOHN DEERE NO. 2 LAY-BY BOOM

Contents	Page
DESCRIPTION	
IDENTIFICATION VIEW	1
OPERATION Attaching lay-by boom to trailer sprayer Attaching lay-by boom to Hi-Cycles Transporting Rates of application	2 3 4
ACCEMBLY	


Description

The John Deere No. 2 Lay-By Boom is designed for use during the late growing season for controlling weeds with liquid herbicide.

Covering four rows at a time, this boom consists of five runners carrying one nozzle each. The nozzles are mounted so the spray pattern covers the entire area between the rows. The lay-by boom may be attached to any John Deere trailer sprayer equipped with the regular boom controls. The tractor pulling the sprayer must be equipped with a remote hydraulic cylinder that conforms to ASAE-SAE standards.

The lay-by boom may also be mounted on the rear of the John Deere Hi-Cycles.

(Specifications and design subject to change without notice.)

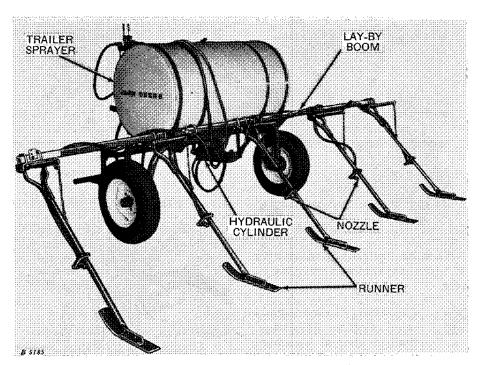


John Deere No. 2 Lay-By Boom Mounted on a Trailer Sprayer


Operation

The No. 2 Lay-By Boom is operated with the controls on the trailer sprayer or on the Hi-Cycle. Refer to the operator's manual furnished with these machines for complete operating, safety, and maintenance instructions.

Attaching lay-by boom to trailer sprayer



Attach the boom to the brackets on the trailer sprayer and secure in place with the Quik-Lock pins.




Hitch the sprayer to the tractor and install the remote hydraulic cylinder.




CAUTION: To avoid backward tipover: (1) Hitch trailer sprayer drawbar

to tractor before filling tank. (2) On unhitching trailer drawbar from tractor with liquid in tank, hold and handle drawbar as firmly and as close to ground as possible.



Control on 29 and 32 Series Sprayers



Control on 30 and 31 Sprayers

Connect the right- and left-hand boom supply hoses to the boom controls.

On the 30 and 31 Sprayers, screw the pipe plug in the top center hole of the boom control. Thank you so much for reading. Please click the "Buy Now!" button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email: ebooklibonline@outlook.com