

665 CENTRAL METERING SEEDER (PIN N00665X001076-



OPERATORS MANUAL 665 CENTRAL METERING SEEDER (PIN N00665X001076-

OMN200115 A8 English

**JOHN DEERE DES MOINES WORKS
OMN200115 A8**

LITHO IN THE U.S.A.
ENGLISH



Introduction

The warranty on this machine appears on your copy of the purchase order which you should have received from your dealer when making your purchase. This warranty provides you the assurance that John Deere will back its products where defects appear within the warranty period. In some circumstances, John Deere also provides field improvements, often without charge to the customer, even if the product is out of warranty.

Warranty and field improvements are a part of John Deere's product support program for customers who operate and maintain their equipment as described in this manual. Should the equipment be abused, or modified to change its performance beyond the original factory specifications, the warranty will become void and field improvements may be denied. Setting fuel delivery above specifications or otherwise overpowering machines will result in such action.




This safety-alert symbol indicates important safety messages in this manual. When you see this symbol, be alert to the possibility of personal injury and carefully read the message that follows.

This manual contains SI Metric equivalents which follow immediately after the U.S. customary units of measure.

"Right-hand" and "left-hand" sides are determined by facing in the direction of tractor forward travel.

Record your model and serial number in Specifications section.

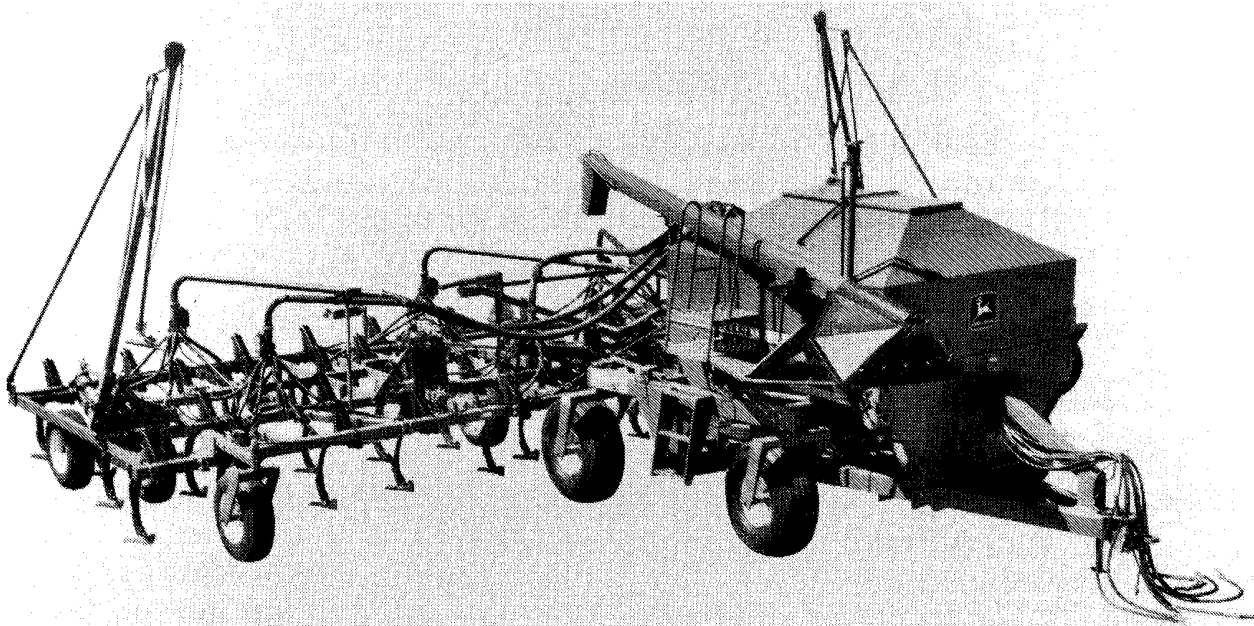

Contents

	Page
SAFETY	5-01
PREPARING THE TRACTOR	10-01
PREPARING THE MACHINE.	15-01
ATTACHING AND DETACHING	20-01
TRANSPORTING	25-01
OPERATING THE ENGINE.	30-01
OPERATING THE MACHINE.	35-01
FUEL AND LUBRICANTS.	40-01
LUBRICATION AND MAINTENANCE.	45-01
TROUBLESHOOTING.	50-01
SERVICE	55-01
STORAGE	60-01
CRIME PREVENTION TIPS	65-01
SPECIFICATIONS	75-01

Safety

RECOGNIZE SAFETY INFORMATION

This is the safety-alert symbol. When you see this symbol on your machine or in this manual, be alert to the potential for personal injury.

Follow recommended precautions and safe operating practices.



AB6;T81389 053;ALERT 160687

UNDERSTAND SIGNAL WORDS

A signal word—DANGER, WARNING, or CAUTION—is used with the safety-alert symbol. DANGER identifies the most serious hazards.

Safety signs with signal word DANGER or WARNING are typically near specific hazards.

General precautions are listed on CAUTION safety signs. CAUTION also calls attention to safety messages in this manual.

⚠ DANGER

⚠ WARNING

⚠ CAUTION


AB6;TS187 053;SIGNAL 071085

FOLLOW SAFETY INSTRUCTIONS

Carefully read all safety messages in this manual and on your machine safety signs. Keep safety signs in good condition. Replace missing or damaged safety signs.

Learn how to operate the machine and how to use controls properly. Do not let anyone operate without instruction.

Keep your machine in proper working condition. Unauthorized modifications to the machine may impair the function and/or safety and affect machine life.

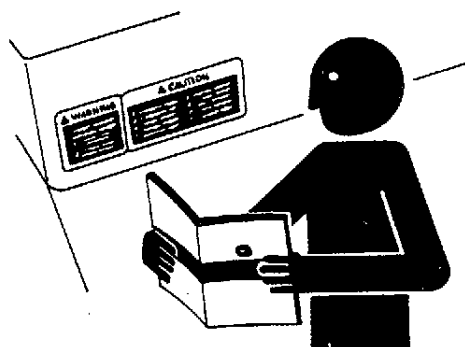

AB6;TS201 053;READ 230487

OPERATE SAFELY

DO NOT operate machine with more than one person on the tractor.

DO NOT allow anyone to ride on the drawbar of the tractor, cart, or frame.

DO NOT enter cart unless another person is present.

Always shut off tractor engine and shift to "Park" when leaving tractor. Remove key when leaving tractor unattended.

Always have machine stationary and on level ground when raising or lowering wings.

DO NOT raise or lower wings when moving.

DO NOT operate close to a ditch or creek or tipping can result.

Slow down when turning.


Drive slowly over rough ground.

Shift the tractor into a lower gear when operating on steep slopes.

Wear relatively tight and belted clothing to prevent being caught on some part of the machine.

When wings are raised and lock-up pins are not in transport position, never allow anyone where a falling wing could strike them.

Be sure machine is lowered to the ground or rear of frame is supported to prevent backward tip before detaching seed cart from chisel plow frame.

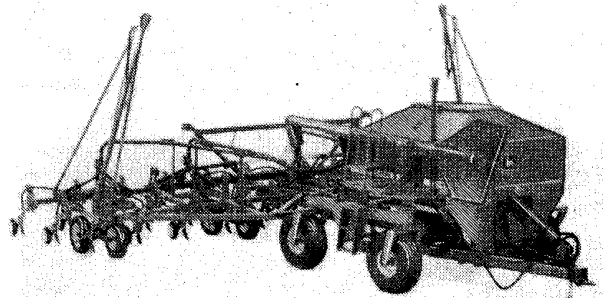


8A2;N37693, 9A5;N39084 N04;;785C A 281087

KEEP RIDERS OFF MACHINE

Only allow the operator on the machine. Keep riders off.

Riders on machine are subject to injury such as being struck by foreign objects and being thrown off of the machine. Riders also obstruct the operator's view resulting in the machine being operated in an unsafe manner.

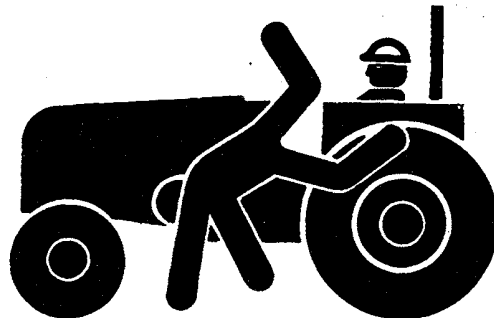


AB6;TS213 053;RIDER 160687

USE SEAT BELT PROPERLY

Use a seat belt when you operate with a roll-over protective structure (ROPS) to minimize chance of injury from an accident such as an overturn.


Do not use a seat belt if operating without a ROPS.

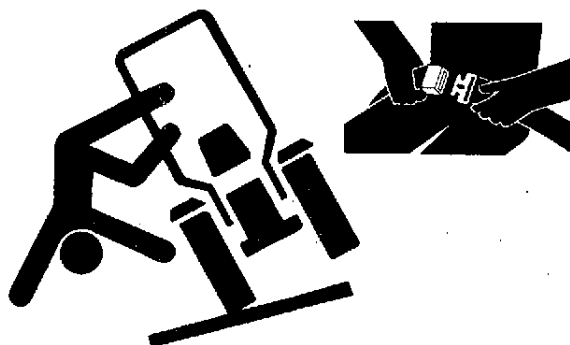

AB6;TS205 053;ROPS1 230487

WEAR PROTECTIVE CLOTHING

Wear close fitting clothing and safety equipment appropriate to the job.

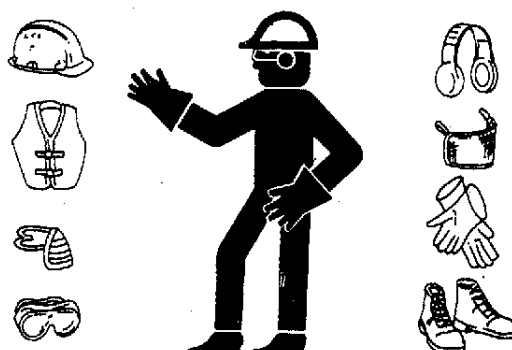

AB6;TS206 053;WEAR2 230487

HANDLE FUEL SAFELY—AVOID FIRES

Handle fuel with care: it is highly flammable. Do not refuel the machine while smoking or when near open flame or sparks.

Always stop engine before refueling machine. Fill fuel tank outdoors.

Prevent fires by keeping machine clean of accumulated trash, grease, and debris. Always clean up spilled fuel.




AB6;TS202 053;FIRE1 230487

PREPARE FOR EMERGENCIES

Be prepared if a fire starts.

Keep a first aid kit and fire extinguisher handy.

Keep emergency numbers for doctors, ambulance service, hospital, and fire department near your telephone.

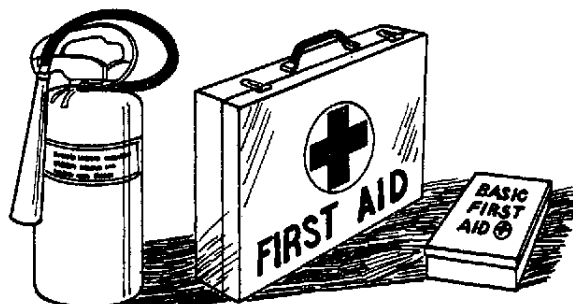

AB6;TS186 053;FIRE2 080785

HANDLE PESTICIDES AND FERTILIZERS CAREFULLY

Keep dust away from skin and hair.

Keep containers low when pouring.

Let the wind blow fumes away from you when mixing with seed or when filling tank.

Wear a filtered respirator if you cannot avoid dust.

Wear goggles to protect your eyes.

Wash exposed skin areas frequently — do not leave pesticide on your skin.


Do not smoke while handling pesticides.

Properly dispose of pesticide container, unused pesticide and left-over treated seed and fertilizer.

Read and observe manufacturers recommendations.

Store pesticides in a separate, plainly marked LOCKED building.

Store pesticides in original containers with labels intact.

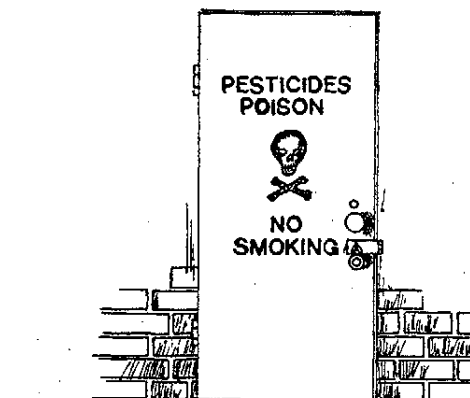


STAY CLEAR OF ROTATING DRIVELINES

Entanglement in rotating driveline can cause serious injury or death.

Keep tractor master shield and driveline shields in place at all times. Make sure rotating shields turn freely.

Wear close fitting clothing. Stop the engine and be sure PTO driveline is stopped before making adjustments, connections, or cleaning out PTO driven equipment.

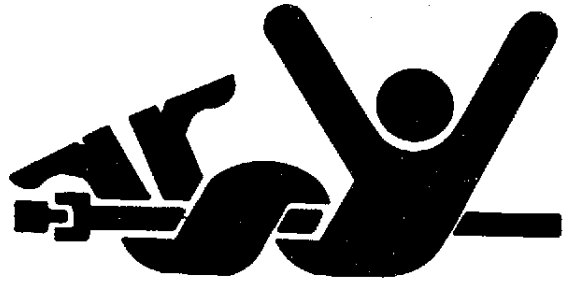

A86;TS198 053;PTO 160687

TRANSPORT SAFELY

Use of flashing warning lights and turn signals is recommended when towing this equipment on public roads unless prohibited by state or local regulations. An implement safety lighting kit is available from your John Deere dealer.

Beware of overhead wires and KNOW the transport height and width of your machine.

Travel at a safe and reasonable speed.

Latch the tractor brakes together.

Shift the tractor into a lower gear when transporting down steep slopes or hills.





Always use wing locks and depth control cylinder stops.

Keep the SMV emblem and reflectors clean and visible from the rear.

Stop slowly.

Set caster wheel brakes (A).

Lock rear caster wheels before transporting cart without tillage frame and use bolts (B) or pins in brake tube of rear caster wheels.

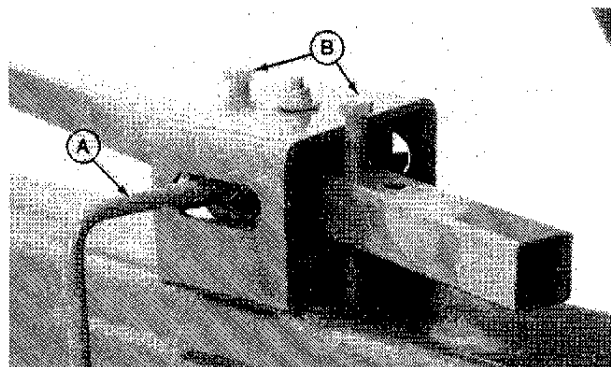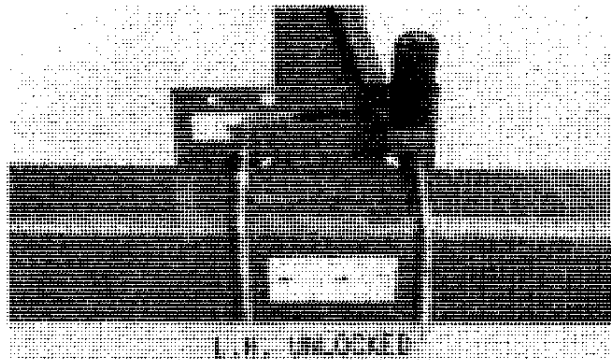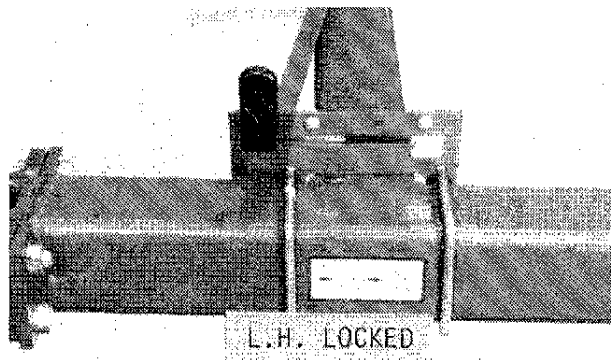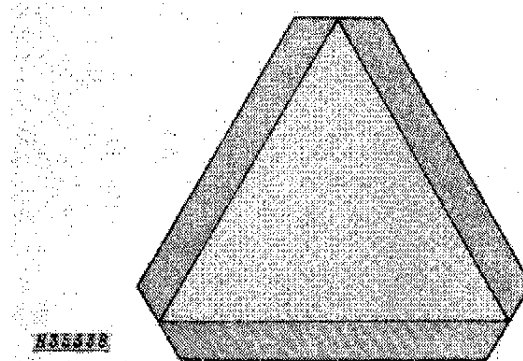


8A6;H35338,8A2,N87220 G1,N87220 E1, N80276 D3 N04;665C E 261087

USE SAFETY LIGHTS AND DEVICES

Flashing warning lights and turn signals are recommended when towing this equipment on public roads unless prohibited by state or local regulations. A safety lighting kit is available from your John Deere dealer.

Keep safety items in good condition. Replace missing or damaged items.

A—Lights C—Reflector Tape
B—Slow Moving Vehicle Emblem D—Reflectors

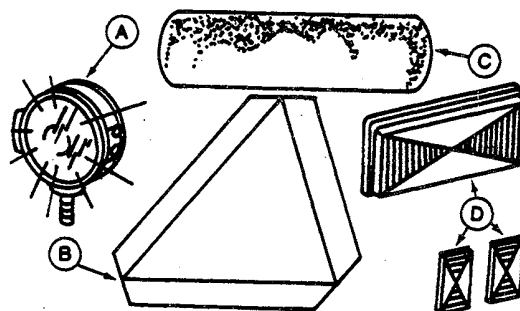


AB6;N36464 053;FLASH 180987

USE A SAFETY CHAIN

A safety chain will help control drawn equipment should it accidentally separate from the drawbar.

Using the appropriate adapter parts, attach the chain to the tractor drawbar support or other specified anchor location. Provide only enough slack in the chain to permit turning.

See your John Deere dealer for a chain with a strength rating equal to or greater than the gross weight of the towed machine. Do not use safety chain for towing.

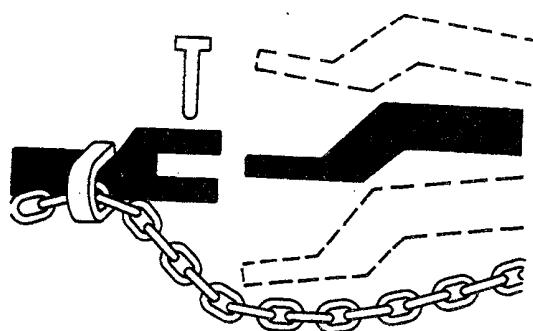

AB6;TS208 053;CHAIN 180987

PRACTICE SAFE MAINTENANCE

Understand service procedure before doing work.

Never lubricate or service machine while it is moving. Keep hands, feet, and clothing from power-driven parts. Disengage all power and operate controls to relieve pressure. Lower equipment to the ground. Allow machine to cool.

Securely support any machine elements that must be raised for service work.

Keep all parts in good condition and properly installed. Fix damage immediately. Replace worn or broken parts. Remove any buildup of grease, oil, or debris.

Disconnect battery ground cable (-) before making adjustments on electrical systems or welding on machine.



AB6;TS209 053;SERV 160687

Thank you so much for reading.
Please click the “Buy Now!”
button below to download the
complete manual.



After you pay.

You can download the most
perfect and complete manual in
the world immediately.

Our support email:

ebooklibonline@outlook.com