

# **9400 PRESS WHEEL HOE DRILL**



## **OPERATORS MANUAL 9400 PRESS WHEEL HOE DRILL**

OMN200122 I9 English

**JOHN DEERE DES MOINES WORKS  
OMN200122 I9  
(THIS MANUAL REPLACES OM-N200122 G8)**

LITHO IN THE U.S.A.  
ENGLISH



# Contents

	Page		Page
<b>Safety</b> .....	05-1	Checking Quantities Drilled-Method 1 .....	35-27
		Checking Quantities Drilled-Method 2 .....	35-27
<b>Identification View</b> .....	10-1		
<b>Preparing The Tractor</b> .....	15-1	<b>Attachments</b>	
		Row Markers .....	40-3
<b>Preparing The Grain Drill</b>		Row Marker Selector Control .....	40-4
Install Lift Cylinder .....	20-1	Shovels .....	40-5
Tire Air Pressure .....	20-1		
Attach SMV Emblem .....	20-2	<b>Lubrication and Maintenance</b> .....	45-1
<b>Attaching and Detaching</b>		<b>Troubleshooting</b> .....	50-1
Attaching Drill To Tractor .....	25-1		
Detaching Drill From Tractor .....	25-2	<b>Service</b>	
		Replace Fertilizer Feed Wheels .....	55-5
<b>Transporting The Grain Drill</b>		Caster Wheel Brake Adjustment .....	55-5
Towing Drill Behind Tractor .....	30-1	Press Wheel Spacers .....	55-6
		Check Openers .....	55-6
<b>Operating The Grain Drill</b>			
Guidelines For Use .....	35-1	<b>Storage</b>	
Check Openers .....	35-2	Preparing Drill For Storage .....	60-1
Adjust Drilling Depth of Front Rank .....	35-2	Removing Drill From Storage .....	60-2
Adjust Drilling Depth of Rear Rank .....	35-2		
Adjust Drilling Depth .....	35-3	<b>Crime Prevention Tips</b> .....	65-1
Down Pressure Adjustment .....	35-3		
Spill Shield .....	35-4	<b>Specifications</b> .....	70-1
Press Wheels .....	35-4		
Slow-Speed Drive Sprocket .....	35-7		
Checking Grain Feeds .....	35-7		
Setting Grain Shifter .....	35-8		
Using Mixtures .....	35-8		
Grain Seeding Charts .....	35-9		
Checking Grass Seeding Feeds .....	35-13		
Grass Seeding Charts .....	35-14		
Adjust Box Partition .....	35-18		
Fertilizer Feed Shaft Speed .....	35-19		
Fertilizer Drive Settings .....	35-19		
Checking Fertilizer Feeds .....	35-20		
Fertilizer Charts .....	35-21		
Cleaning Grain Drill Box .....	35-22		
Using Density Meter .....	35-24		

*All information, illustrations and specifications in this manual are based on the latest information available at the time of publication. The right is reserved to make changes at any time without notice.*

OMN200122-19-29AUG89

COPYRIGHT® 1989  
DEERE & COMPANY  
Moline, Illinois  
All rights reserved  
A John Deere ILLUSTRATION™ Manual

# Safety

## RECOGNIZE SAFETY INFORMATION

This is the safety-alert symbol. When you see this symbol on your machine or in this manual, be alert to the potential for personal injury.

Follow recommended precautions and safe operating practices.



O53,ALERT -19-16JUN87

T81389 -UN-07DEC86

## UNDERSTAND SIGNAL WORDS

A signal word—DANGER, WARNING, or CAUTION—is used with the safety-alert symbol. DANGER identifies the most serious hazards.

Safety signs with signal word DANGER or WARNING are typically near specific hazards.

General precautions are listed on CAUTION safety signs. CAUTION also calls attention to safety messages in this manual.

**▲ DANGER**

**▲ WARNING**

**▲ CAUTION**

O53,SIGNAL -19-07OCT85


TS187 -19-30SEP86

## FOLLOW SAFETY INSTRUCTIONS

Carefully read all safety messages in this manual and on your machine safety signs. Keep safety signs in good condition. Replace missing or damaged safety signs.

Learn how to operate the machine and how to use controls properly. Do not let anyone operate without instruction.

Keep your machine in proper working condition. Unauthorized modifications to the machine may impair the function and/or safety and affect machine life.

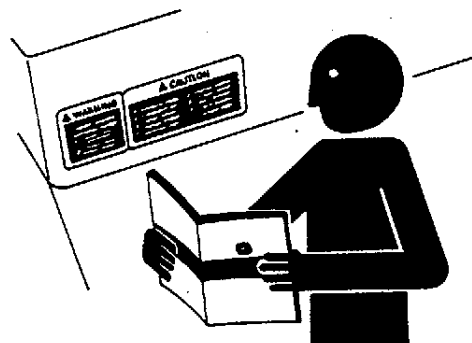

O53,READ -19-23APR87


TS201 -UN-23AUG86



## KEEP RIDERS OFF MACHINE

Only allow the operator on the machine. Keep riders off.

Riders on machine are subject to injury such as being struck by foreign objects and being thrown off of the machine. Riders also obstruct the operator's view resulting in the machine being operated in an unsafe manner.

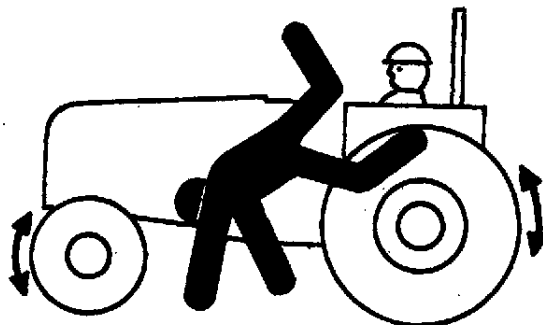

O53, RIDER -19-03MAY88

UN-23AUG88


TS290

## PREPARE FOR EMERGENCIES

Be prepared if a fire starts.

Keep a first aid kit and fire extinguisher handy.

Keep emergency numbers for doctors, ambulance service, hospital, and fire department near your telephone.

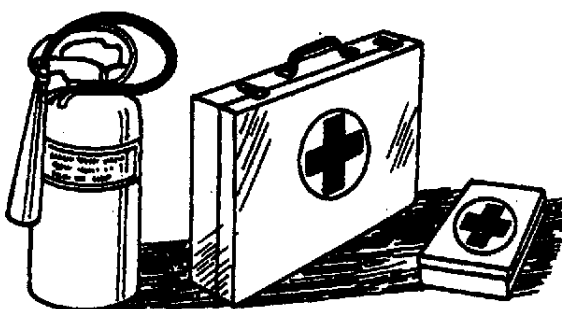


O53, FIRE2 -19-03MAR88

UN-23AUG88

TS291

## WEAR PROTECTIVE CLOTHING

Wear close fitting clothing and safety equipment appropriate to the job.

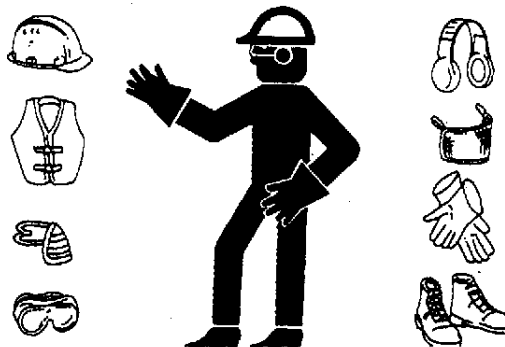

O53, WEAR2 -19-23APR87

UN-23AUG88

TS206



## HANDLE PESTICIDES AND FERTILIZERS CAREFULLY

Keep dust away from skin and hair.

Keep containers low when pouring.

Let the wind blow fumes away from you when mixing with seed or when filling tank.

Wear a filtered respirator if you cannot avoid dust.

Wear goggles to protect your eyes.

Wash exposed skin areas frequently—do not leave pesticide on your skin.


Do not smoke while handling pesticides.

Properly dispose of pesticide container, unused pesticide and left-over treated seed and fertilizer.

Read and observe manufacturers recommendations.

Store pesticides in a separate, plainly marked LOCKED building.

Store pesticides in original containers with labels intact.

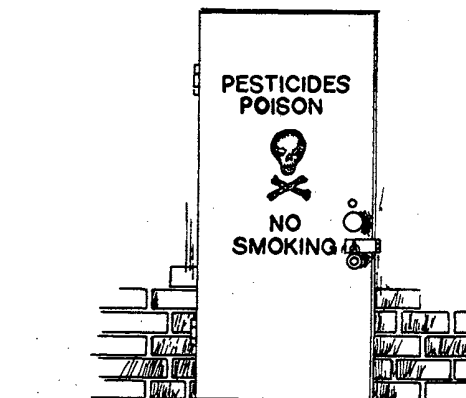

-UN-04OCT88

N35988

-UN-04OCT88

N35989

-19-31JAN89

N33983

N04,655C,A -19-05APR84




## USE SAFETY LIGHTS AND DEVICES

When transporting your machine on a road or highway at night or during the day, use necessary safety lights. Check local governmental regulations. A safety lighting kit is available from you John Deere dealer.

Keep safety items in good condition. Replace missing or damaged items.

- A—Lights  
B—Slow Moving Vehicle Emblem  
C—Reflector Tape  
D—Reflectors

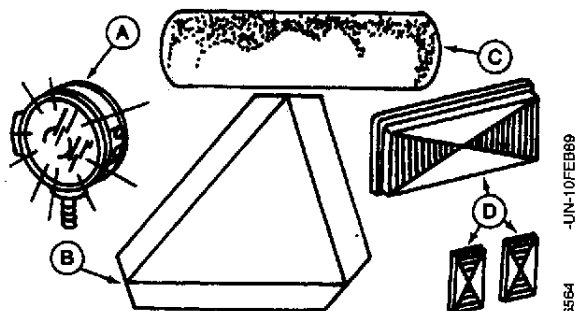

UN-10FEB89  
N36564


Q53,WARN -19-07JAN88

## USE A SAFETY CHAIN

A safety chain will help control drawn equipment should it accidentally separate from the drawbar.

Using the appropriate adapter parts, attach the chain to the tractor drawbar support or other specified anchor location. Provide only enough slack in the chain to permit turning.

See your John Deere dealer for a chain with a strength rating equal to or greater than the gross weight of the towed machine. Do not use safety chain for towing.

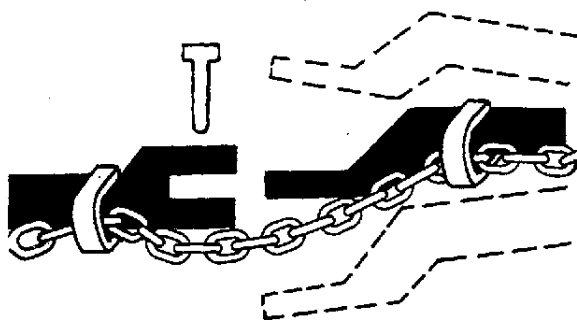

UN-25AUG88  
TS217

Q53,CHAIN -19-17DEC87



## TRANSPORT SAFELY

**CAUTION:** To avoid injury or death do not contact electric lines.

Remember height of markers in transport position is 15.1 ft (4.6 m), (four-drill marker).

Shift tractor into a lower gear when transporting down steep slopes or hills.

Make sure reflectors and SMV emblem are easily visible from rear.

Stop slowly.

Remember transport width is 10 feet (3.1 m).



N04,9400,CF -19-24NOV87

N99394 -UN-06OCT88

## PRACTICE SAFE MAINTENANCE

Understand service procedure before doing work. Keep area clean and dry.

Never lubricate or service machine while it is moving. Keep hands, feet, and clothing from power-driven parts. Disengage all power and operate controls to relieve pressure. Lower equipment to the ground. Stop the engine. Remove the key. Allow machine to cool.

Securely support any machine elements that must be raised for service work.

Keep all parts in good condition and properly installed. Fix damage immediately. Replace worn or broken parts. Remove any buildup of grease, oil, or debris.

Disconnect battery ground cable (-) before making adjustments on electrical systems or welding on machine.



O53,SERV -19-21DEC87


TS218 -UN-23AUG88



## AVOID HIGH-PRESSURE FLUIDS

Escaping fluid under pressure can penetrate the skin causing serious injury. Relieve pressure before unhooking hydraulic or other lines. Tighten all connections before applying pressure. Keep hands and body away from pinholes and nozzles which eject fluids under high pressure. Use a piece of cardboard to search for leaks.

If ANY fluid is injected into the skin, it must be surgically removed within a few hours by a doctor familiar with this type injury or gangrene may result.

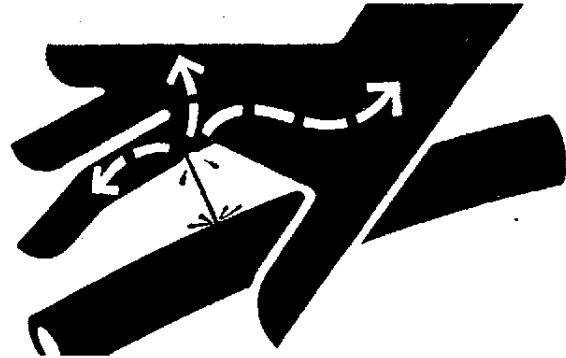

-JUN-23AUG88

X9811


O53,FLUID -19-18SEP87





## SAFETY SIGNS


### ⚠ WARNING





#### AVOID INJURY FROM FALLING MARKER:

1. Be sure cylinder and attaching hoses are fully charged with oil before operating markers. Failure to do so will allow markers to fall rapidly when lowering from folded position.
2. Stay clear of markers during raising and lowering.

### ⚠ WARNING



Chemicals may cause eye, skin, or breathing problems.  
Wear face mask, gloves and goggles.  
Read and follow safety instructions on the chemical supplier's label.

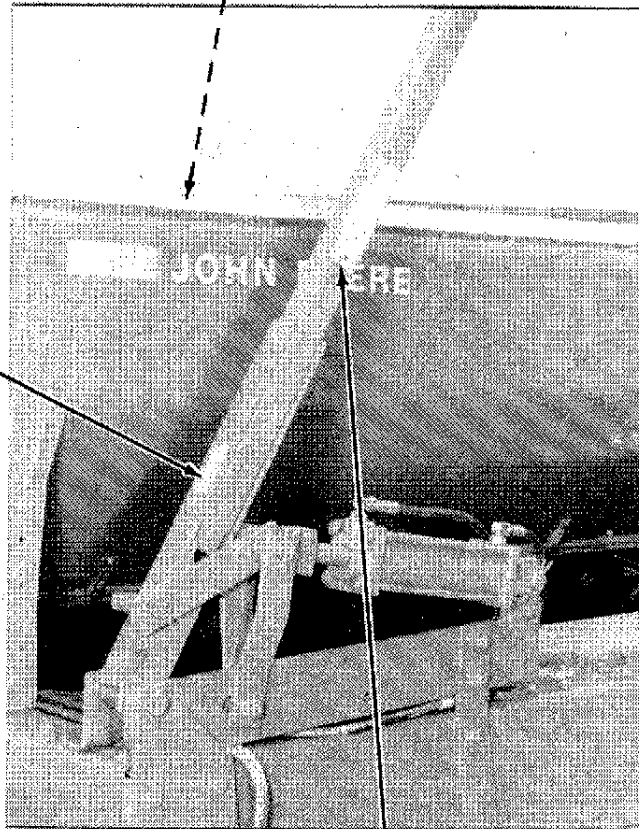

### ⚠ DANGER

To avoid injury or death do not contact electric lines

5

Thank you so much for reading.  
Please click the “Buy Now!”  
button below to download the  
complete manual.



After you pay.

You can download the most  
perfect and complete manual in  
the world immediately.

Our support email:

[ebooklibonline@outlook.com](mailto:ebooklibonline@outlook.com)