### **JOHN DEERE**

# WORLDWIDE COMMERCIAL & CONSUMER EQUIPMENT DIVISION

 Powerhead - PA01184
 Powerhead - PA01185

 CS56 16" - UT10895
 CS62 16" - UT10898

 CS56 18" - UT10896
 CS62 18" - UT10899

 CS56 20" - UT10897
 CS62 20" - UT10900

**Chain Saws** 

### **OPERATOR'S MANUAL**



OM PS04119 K3

### **INTRODUCTION**

## Thank You for Purchasing a John Deere Product

We appreciate having you as a customer and wish you many years of safe and satisfied use of your machine.

Record your Identification numbers below. Be sure you have Serial Number and Unit (UT) Number, your dealer will need these when you order parts.

#### **The Operator's Manual**

Your operator's manual is for your protection. READ IT. Keep it handy for reference. Know what you are doing before you begin assembly of the unit. Proper preparation and upkeep go hand-in-hand with satisfactory performance of the saw and safety.

This manual should be considered a permanent part of your machine and should remain with the machine if you sell it.

Model		
Serial Number		

UT Number

### **↑** WARNING

The engine exhaust from this product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.

**CALIFORNIA PROPOSITION 65** 

All information, illustrations and specifications in this manual may vary according to Country requirements and are subject to change without notice by the manufacturer.

All information, illustrations and specifications in this manual are based on the latest information at the time of publication.

The right is reserved to make changes at any time without notice.

©2001 Deere & Co.

2 English

### **TABLE OF CONTENTS**


Pro	oduct Identification	
	Chain Saw Components	4
Sa	fety	
	Understanding Safety Labels	5
	State and Local Requirements	5
	Precautions Against Kickback	6
	Basic Safety Precautions	6
	Understanding Your Chain Saw Safety Devices	8
As	sembly	
	Assembling the Bar and Chain	9
Op	eration	
•	Chain Tension	. 11
	Breaking-in the Chain	. 11
	Bucking Spike	
	Fueling	
	Chain Oil System	
	Starting the Engine	
	Breaking-in the Engine	
	Stopping the Engine	
	Carburetor Adjustment	
	Chain Brake Operation	
	Preparation for Cutting	
	Tree Felling	
	Bucking	
	Limbing and Pruning	
Ма	intenance	
	Maintenance Chart	. 19
	Chain Maintenance	. 20
	Guide Bar Maintenance	
	Installing the Safe-T-Tip® Nose Guard	
	Fuel Filter	
	Air Filter	
	Starter Unit	
	Engine	
	Spark Plug	
	Spark Arresting Muffler	
	Chain Brake	
	Oil Pump (Automatic/Adjustable)	. 24
Ва	r and Chain Combinations	
	Recommended Bar and Chain Combinations	
Tro	publeshooting	
	Using Troubleshooting Chart	. 26
Sto	prage	
	Storing Chain Saw (1 month or longer)	. 27
Te	chnical Data	
	CS56	. 27
	CS62	
Wa	rranty	
	Limited Warranty	. 28
	Federal Emissions Warranty	
	•	


### **PRODUCT IDENTIFICATION**

### **Chain Saw Components**

- 1 Throttle Trigger Lockout
- 2 Half Throttle Lock
- 3 Carburetor Adjustment Screws
- 4 Front Handle
- 5 Chain Brake Lever / Hand Guard
- 6 Muffler
- 7 Safe-T-Tip®
- 8 Compression Relief Valve
- 9 Clutch Cover
- 10 Choke Lever
- 11 Throttle Trigger

- 12 Rear Handle
- 13 Chain
- 14 Guide Bar
- 15 Air Filter Cover
- 16 Ignition Switch
- 17 Purge Bulb
- 18 Fuel Tank Cap
- 19 Starter Handle
- 20 Oil Tank Cap
- 21 Combination Wrench

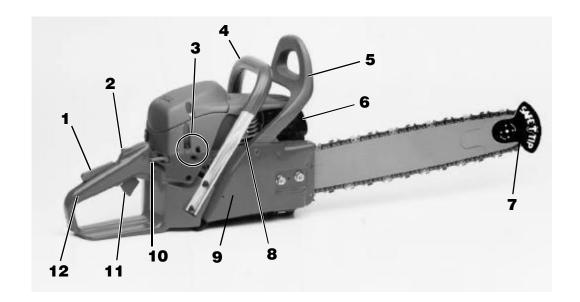

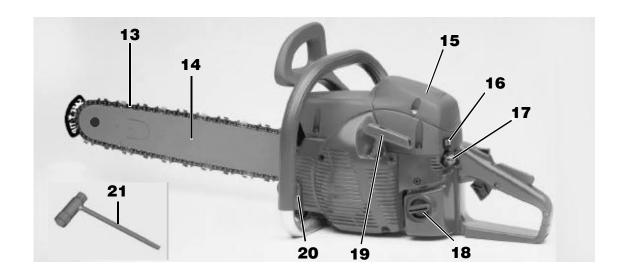

4 English

#### **Understanding Safety Labels**



This symbol indicates Warning, Danger, and Caution.



Wear eye, hearing and head protection when operating this equipment.



The SAFE-T-TIP® Nose Guard on your bar nose prevents kickback.



Your manual contains special messages to bring attention to potential safety concerns, machine damage as well as helpful operating and servicing information. Please read all the information carefully to avoid injury and machine damage.



DANGER! Beware of Kickback.



Wear non-slip, heavy-duty protective gloves when handling the chain saw and saw chain.



Avoid bar nose contact.



Hold saw properly with both hands.

#### **State and Local Requirements**

Your saw is equipped with a temperature limiting muffler, a spark arresting screen and dual bucking spikes in order to comply with the requirements of SAE Recommended Practice J335 and California Codes 4442 and 4443. All national forest land and land managed by the states of California, Maine, Washington, and Oregon require internal combustion engines to be equipped with a spark arrester screen by law. Other states and federal agencies are enacting similar regulations.

If you operate a chain saw in a state or locale where such regulations exist, you are legally responsible for maintaining the operating condition of these parts. Failure to do so is a violation of a law. Spark arrester maintenance is described in the Maintenance-Spark Arresting Muffler Section of the manual.

### 

Muffler surfaces are very hot during and after operation of the chain saw, keep all body parts away from the muffler. Serious burns may occur if contact is made with the muffler.

#### **WARNING**

Exposure to vibrations through prolonged use of gasoline powered hand tools could cause blood vessel or nerve damage in the fingers, hands, and wrists of people prone to circulation disorders or abnormal swellings. Prolonged use in cold weather has been linked to blood vessel damage in otherwise healthy people. If symptoms occur such as numbness, pain, loss of strength, change in skin color or texture, or loss of feeling in the fingers, hands, or wrists, discontinue the use of this tool and seek medical attention.

English 5

Thank you so much for reading. Please click the "Buy Now!" button below to download the complete manual.



After you pay.

You can download the most perfect and complete manual in the world immediately.

Our support email: ebooklibonline@outlook.com