

JOHN DEERE
WORLDWIDE COMMERCIAL & CONSUMER
EQUIPMENT DIVISION

Material Collection System (MCS)
600 Liter High Dump

OMTCU16532 L3

OPERATOR'S MANUAL



JOHN DEERE

All information, illustrations and specifications in this manual are based on the latest information at the time of publication. The right is reserved to make changes at any time without notice.

COPYRIGHT© 2004
Deere & Co.

John Deere Worldwide Commercial and
Consumer Equipment Division
All rights reserved
Previous Editions
COPYRIGHT©

North American Version
Litho in U.S.A.

INTRODUCTION

Introduction

Using Your Operator's Manual

This manual is an important part of your machine and should remain with the machine when you sell it.

Use the safety and operating information in the attachment operator's manual along with the machine operator's manual to operate and service the attachment safely and correctly.

Specifications and design are subject to change without notice.

Product Identification

Product Compatibility

The 600 Liter High Dump Material Collection System is compatible with the 1420, 1435, 1445 4WD models and the 1565 Front Mower.

Record Identification Numbers

600Liter High-Dump Material Collection System

Serial No. (010001-)

If you need to contact an Authorized Service Center for information on servicing, always provide the product model and serial number.

You will need to locate the model and serial number for the attachment and record the information in the spaces provided below.

DATE OF PURCHASE:

DEALER NAME:

DEALER PHONE:

PRODUCT SERIAL NUMBER (A):

Safety Labels

Understanding The Machine Safety Labels




Safety-Alert Symbol

The machine safety labels shown in this section are placed in important areas on your machine to draw attention to potential safety hazards.

On your machine safety labels, the words DANGER, WARNING, and CAUTION are used with this safety-alert symbol. DANGER identifies the most serious hazards.

The operator's manual also explains any potential safety hazards whenever necessary in special safety messages that are identified with the word, CAUTION, and the safety-alert symbol.

Safety Labels

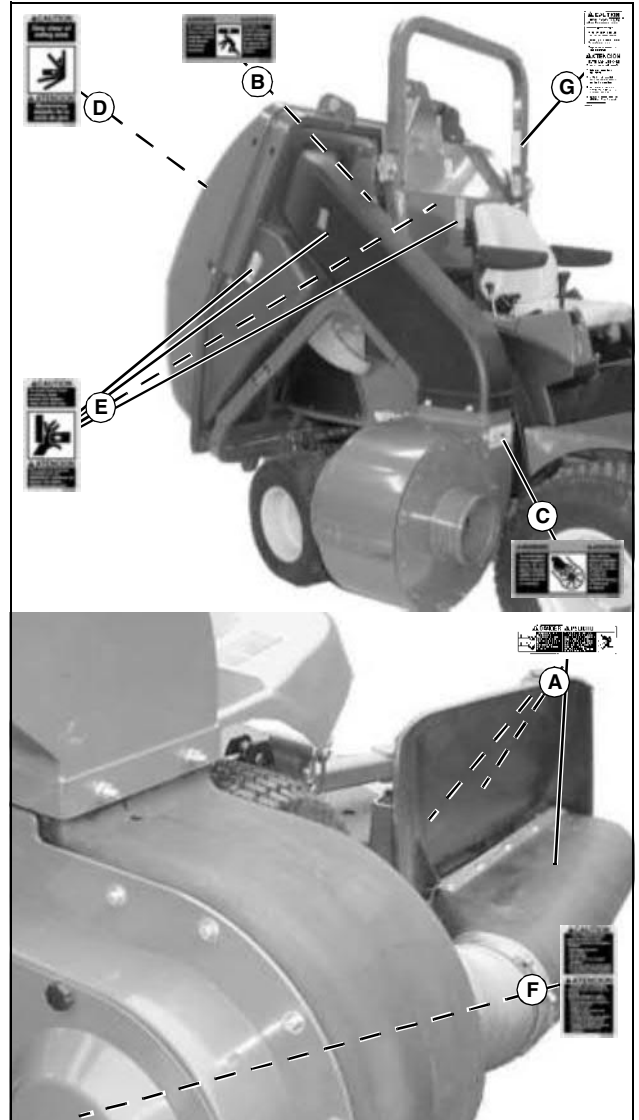

M131748, TCU16757, TCU16754, TCU16755, TCU16753, TCU16756, MT7235, MX13191, MX15607

A) DANGER

- To avoid injury from rotating blades and thrown objects, stay clear of deck edge and keep others away. Do not mow without discharge chute or entire grass catcher in place.

B) WARNING

- Avoid injury from crushing. Engage safety lock before getting into hazardous area.

C) WARNING

- To avoid injury from impeller blade, do not open or remove safety shields while engine is running.

SAFETY

D) CAUTION

- Stay clear of swing area.

E) CAUTION

- To avoid injury from crushing, keep hands and fingers away from this area.

F) CAUTION-HELP AVOID INJURY

- Keep all shields in place.
- Before servicing or unclogging machine:
 - Disengage all power.
 - Stop engine.
 - Remove key.
 - Be sure rotor has stopped revolving.
 - Do not use hands to unclog chute.
 - Do not walk in front of machine or direct discharge at bystanders.

G) CAUTION-HELP AVOID INJURY

- Read the operator's manual.
- Trained operators only.
- Keep shields in place and maintain all safety devices.
- Do not operate when children or others are around.
- Stop engine whenever you leave the mower.

Safety

Read the general safety operating precautions in your machine operator's manual for additional safety information.

Operating Safely

Read, understand and follow all instructions in this attachment manual, the machine operator's manual and safety signs on equipment before starting. Use proper front ballast. Remove ballast when the material collection system is removed.

Hopper extends beyond machine. Be aware of surrounding objects when making short turns.

Do not operate material collection system unless entire grass catcher is fastened in place with hopper cover securely latched.

Do not let anyone ride on the mower or material collection system. Riders are subject to injury such as being struck by foreign objects or being thrown off. Riders may obstruct the operator's view and cause a collision.

Before bag removal or installation:

- Stop mower.
- Disengage mower or PTO.
- Stop engine and remove key.
- Wait for engine and all moving parts to stop before leaving the operator seat.

Before backing up machine:

- Stop machine.
- Look behind hopper for children.
- Keep bystanders away when unloading material collection system.

Operate safely on slopes:

- Empty bags when they are half full.
- Do not operate on steep slopes.
- Before turning, slow down.
- Avoid sudden starts and stops.
- Do not park machine with material collection system on slopes.

Bag Maintenance:

- Bag is subject to wear and deterioration.
- Check bag frequently; replace when necessary.
- Use John Deere bag or equivalent to comply with safety specifications.
- Do not leave clippings in bags overnight.


Parking Safely

1. Stop machine on a level surface, not on a slope.
2. Disengage mower blades or any other attachments.
3. Lower attachments to the ground.
4. Lock the park brake.
5. Stop the engine.
6. Remove the key.
7. Wait for engine and all moving parts to stop before you leave the operator's seat.
8. Close fuel shut-off valve, if your machine is equipped.
9. Disconnect the negative battery cable or remove the spark plug wire (for gasoline engines) before servicing the machine.

Protect Children

- Tragic accidents can occur if the operator is not alert to the presence of children. Keep children indoors when the machine and attachment are operated and under the watchful care of another responsible adult.
- Never assume that children will remain where you last saw them. Stay alert to the presence of children. Turn the machine off if a child enters the work area.
- Do not let children or an untrained person operate the machine.
- Do not carry or let children ride on any attachment or machine even with the attachment off. Do not tow children in a cart or trailer.

Avoid Injury From Thrown Objects

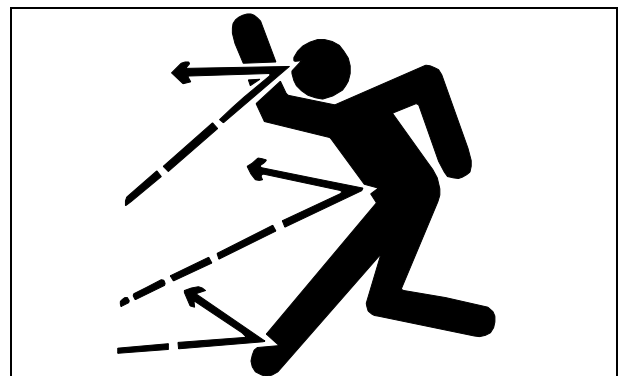


- When operating the vehicle with the MCS attachment installed make

SAFETY

sure all chutes and hoses are securely in place. Keep hopper top closed or MCS in operating position.

- Stop the engine and wait for all moving parts to stop before removing or lifting any attachment components.
- Avoid injury from impeller blades and thrown objects. Remove attachment when operating vehicle in side discharge mode. Make sure deflector shield is in place on mower deck if attachment is removed.

Avoid Injury From Rotating Blades

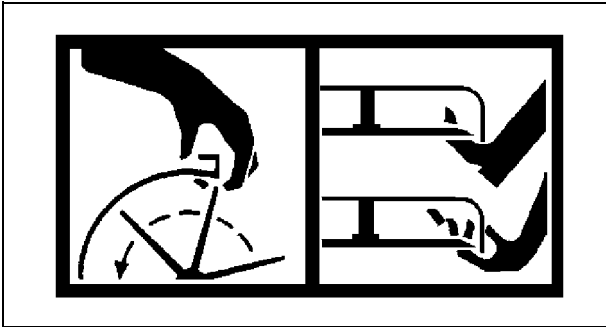

M75354

- Keep hands and feet away from rotating blades and blower assembly when engine is running.
- Stop engine and wait for moving parts to stop before servicing components.
- Do not operate MCS or blower unless all attachment components are in place and latched.

Practice Safe Maintenance



- Only qualified, trained adults should service this machine.
- Understand service procedure before doing work. Keep area clean and dry.
- Do not operate the engine in a confined space where dangerous carbon monoxide fumes can collect.
- Never lubricate, service or adjust the machine or attachment while it is moving. Keep safety devices in place and in working condition. Keep hardware tight.
- Keep hands, feet, clothing, jewelry, and long hair away from any moving parts, to prevent them from getting caught.
- Lower any attachment completely to the ground or to an existing attachment mechanical stop before servicing the attachment. Disengage all power and stop the engine. Lock park brake and remove the key. Let machine cool.

- Disconnect battery or remove spark plug wire (for gasoline engines) before making any repairs.
- Before servicing attachment, carefully release pressure from any components with stored energy, such as hydraulic components and springs.
- Securely support any machine or attachment elements that must be raised for service work. Use jack stands or lock service latches to support components when needed.
- Never run engine unless park brake is locked.
- Keep all parts in good condition and properly installed. Fix damage immediately. Replace worn or broken parts. Replace all worn or damaged safety and instruction decals.
- Check all hardware at frequent intervals to be sure the equipment is in safe working condition.
- Do not modify machine or safety devices. Unauthorized modifications to the machine or attachment may impair its function and safety.


Using the Lift Cylinder Safety Lock

To safely service the machine with the MCS in the raised position, always use the lift cylinder safety lock.



CAUTION: Avoid injury! Attachment is heavy and can crush.

- Support any raised attachment with a mechanical lock or other safe method before servicing.
- Empty all material from any attachment before servicing.

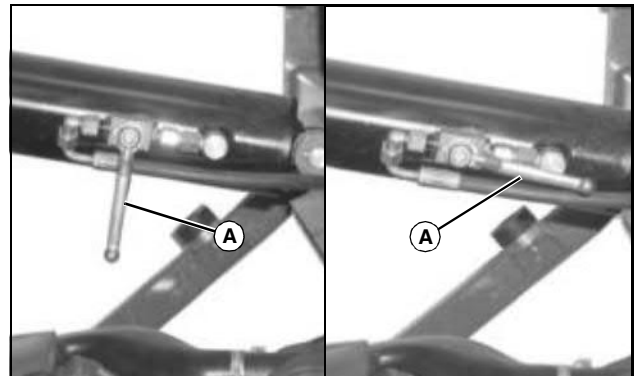

MX13198

- To lock the hydraulic lift in the raised position, turn handle (A) to the left as shown.
- To unlock the hydraulic lift, turn handle (A) to the right as shown.

ASSEMBLY

Avoid High Pressure Fluids



- Hydraulic hoses and lines can fail due to physical damage, kinks, age, and exposure. Check hoses and lines regularly. Replace damaged hoses and lines.
- Hydraulic fluid connections can loosen due to physical damage and vibration. Check connections regularly. Tighten loose connections.
- Escaping fluid under pressure can penetrate the skin causing serious injury. Avoid the hazard by relieving pressure before disconnecting hydraulic or other lines. Tighten all connections before applying pressure.
- Search for leaks with a piece of cardboard. Protect hands and body from high pressure fluids.
- If an accident occurs, see a doctor immediately. Any fluid injected into the skin must be surgically removed within a few hours or gangrene may result. Doctors unfamiliar with this type of injury should reference a knowledgeable medical source. Such information is available from Deere & Company Medical Department in Moline, Illinois, U.S.A. Information may be obtained in the United States and Canada only by calling 1-800-822-8262.


Qty.	Description
2	Bolt, M20 x 100 (early models)
2	Bolt, M16 x 40
4	Bolt, M12 x 35
2	Bolt, M10 x 35
2	Bolt, M10 x 25
2	Locknut, M20 (early models)
2	Locknut, M16
4	Locknut, M12
4	Locknut, M10
2	Lockwasher, M20 (late models)
2	Washer, M16
2	Spacer

Install Blower Housing

1. Install support stands on MCS frame.



CAUTION: Avoid injury! The blower housing is heavy. Install the support stand or use a safe lifting device to support the blower housing and prevent it from falling.

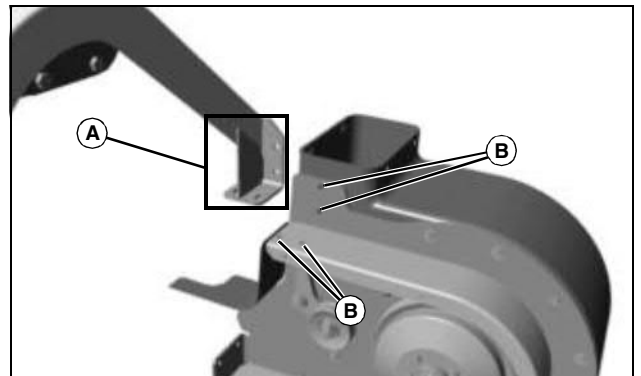

MX15626

2. Line up the holes in blower housing (B) with the holes in MCS frame (A).
3. Install blower housing to MCS frame and secure with four nuts.

Assembly

Identify Parts

Qty.	Description
1	Driveline
1	Wire Harness
2	ROPS Bracket
2	Rear Bracket
1	Belt (1650mm)
1	Belt (1350mm)
1	Pulley
1	Bag of Parts

Bag of Parts

Qty.	Description
2	Bolt, M20 x 130 (late models)

Thank you so much for reading.
Please click the “Buy Now!”
button below to download the
complete manual.



After you pay.

You can download the most
perfect and complete manual in
the world immediately.

Our support email:

ebooklibonline@outlook.com