

---

# CONTENTS

Title	Page
<b>Section 1 - General Information and Safety</b>	
To the owner .....	1-1
Product identification .....	1-2
Ecology and the environment .....	1-4
Safety precautions .....	1-5
Safety decals .....	1-11
International symbols .....	1-14
Airborne noise emission .....	1-15
<b>Section 2 - Controls, Instruments and Operation</b>	
Cab .....	2-2
Seats .....	2-17
Handbrake, Throttle and Foot Controls .....	2-23
Instrument Console .....	2-25
Analogue and Analogue/Digital Instruments .....	2-28
Electronic Instrument Panel .....	2-34
Synchro Command Transmission (16 x 16 and 20 x 16) .....	2-54
Dual Command Transmission (24 x 12 and 23 x 12) .....	2-61
Range Command Transmission (18 x 6 and 17 x 6) .....	2-70
Power Command Transmission (18 x 6 and 17 x 6) .....	2-85
Electronic Management Unit .....	2-100
<b>Section 3 - Field Operation</b>	
Starting and Stopping the Engine .....	3-2
Rear Power Take-Off .....	3-9
Front Power Take-Off and Hydraulic Lift .....	3-25
Mechanical Lower Link Sensing Hydraulics .....	3-32
Remote Control Valves - open centre .....	3-38
Electronic Draft Control .....	3-51
Remote Control Valves - closed centre .....	3-58
Three-point Linkage .....	3-65
Front Wheel Track Adjustment .....	3-73
Rear Wheel Track Adjustment .....	3-83
Ballasting and Tyres .....	3-97
<b>Section 4 - Lubrication and Maintenance</b>	
General information .....	4-1
Lubrication and maintenance chart .....	4-6
Servicing when warning lights illuminate .....	4-7
10-hour/daily service .....	4-13
50-hour service .....	4-15
300-hour service .....	4-27
600-hour service .....	4-35
1200-hour/12 month service .....	4-39
1200-hour/24 month service .....	4-45
1800-hour service .....	4-51
General maintenance - as required .....	4-53

---

## **Section 5 - Fault Finding**

Introduction .....	5-1
Engine .....	5-2
Transmission - Range Command and Power Command .....	5-5
Transmission - Dual Command .....	5-6
Transmission - Synchro Command .....	5-7
Hydraulics .....	5-8
3-point linkage .....	5-9
Brakes .....	5-10
Cab .....	5-10
Electrical .....	5-11

## **Section 6 - Vehicle Storage** ..... 6-1

## **Section 7 - Accessories**

Roof Beacon .....	7-2
Automatic Engine Shut Down .....	7-2
Hydraulic Trailer Brakes .....	7-3
Air-Operated Trailer Brakes .....	7-4
Walterscheid Hitch .....	7-9
Walterscheid Automatic Stabilisers .....	7-11
Sway Block Stabilisers .....	7-13
Drawbars and Towing Attachments .....	7-15

## **Section 8 - Specification**

General Dimensions .....	8-2
Weight .....	8-4
Engine .....	8-5
Fuel System .....	8-5
Cooling System .....	8-6
Transmission Availability .....	8-6
Hydraulic System Availability .....	8-7
Three-Point Lift .....	8-7
Front Power Lift .....	8-7
Brakes .....	8-8
Steering .....	8-8
Maximum Operating Angle .....	8-8
Front Power Take-Off Availability .....	8-9
Rear Power Take-Off Availability .....	8-9
Electrical Equipment .....	8-8
Lubricant and Fluid Capacities .....	8-10
Lubricant and Fluid Specifications .....	8-12

## **Section 9 - First 50-hour Service Forms** ..... 9-1

## **Section 10 - Index** ..... 10-1

---

# SECTION 1

## GENERAL INFORMATION AND SAFETY

### TO THE OWNER

#### GENERAL

This Manual has been prepared to assist you in the correct procedure for running-in, driving and operating and for the maintenance of your new tractor. Your tractor, which was designed to power and propel itself, is intended for use in normal and customary agricultural applications.

Read this Manual carefully and keep it in a convenient place for future reference. If at any time you require advice concerning your tractor, do not hesitate to contact your authorised dealer. He has factory trained personnel, genuine manufacturers' parts and the necessary equipment to carry out all your service requirements.

Your tractor has been designed and built to give maximum performance, economy and ease of operation under a wide variety of operating conditions. Prior to delivery, the tractor was carefully inspected, both at the factory and by your dealer to ensure that it reaches you in optimum condition. To maintain this condition and ensure trouble-free operation, it is important that the routine services, as specified in Section 4 of this Manual, are carried out at the recommended intervals.

#### CLEANING THE TRACTOR

Your tractor is a state-of-the-art machine with sophisticated, electronic controls. This should be borne in mind when cleaning the tractor, particularly if using a high pressure washer. Even though every precaution has been taken to safeguard electronic components and connections, the pressure generated by some of these machines is such that complete protection against water ingress cannot be guaranteed.

When using a high pressure washer, do not stand too close to the tractor and avoid directing the jet at electronic components, electrical connections, breathers, seals, filler caps, etc. Never direct a cold water jet at a hot engine or exhaust.

#### SAFETY

Pages 1–5 to 1–10 inclusive list the precautions to be observed to ensure your safety and the safety of others. Read the safety precautions and follow the advice offered **before** operating the tractor.

#### FIRST 50 HOUR SERVICE

In Section 9, at the back of this Manual, you will find the 50-hour service reports.

After you have operated the tractor for 50 hours, take your tractor, together with this Manual, to your dealer. He will then perform the factory recommended 50 hour service and complete the service report sheets (pages 9–1 and 9–3). The first sheet (page 9–1) is the dealer's copy and should be removed by the dealer after the service has been carried out. The second sheet (page 9–3) is your copy of the service performed. **Ensure that you and the dealer sign both copies.**

#### SERVICE PARTS

It should be pointed out that genuine parts have been examined and approved by the Company. The installation and/or use of 'non-genuine' products could have negative effects upon the design characteristics of your tractor and thereby affect its safety. The Company is not liable for any damage caused by the use of 'non-genuine' parts and accessories. Only genuine New Holland replacement parts should be used. The use of non-genuine parts may invalidate legal approvals associated with this product.

It is prohibited to carry out any modifications to the tractor unless specifically authorised, in writing, by the After Sales Service department of the Company.

#### WARRANTY

Your tractor is warranted according to legal rights in your country and the contractual agreement with the selling dealer. No warranty shall, however, apply if the tractor has not been used, adjusted and maintained according to the instructions given in the Operator's Manual.


## PRODUCT IDENTIFICATION

The tractor and major components are identified using serial numbers and/or manufacturing codes. Tractor identification data must be supplied to the dealer when requesting parts or service and will also be needed to aid in identifying the tractor if it is ever stolen.



The following provides the locations of the identification data.

### Vehicle Identification Plate - Figure 1

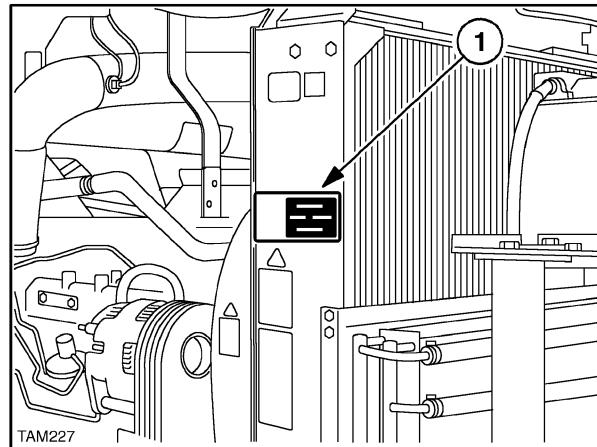The vehicle identification plate, (1) Figure 1 is located on the right-hand radiator support. Record the information on the sample identification plate provided below.




1

 <b>NEW HOLLAND</b>  <b>New Holland U.K.</b> <b>Limited</b>  	TRACTOR NUMBER	
	[Redacted]	
	MODEL	DRIVELINE
	[Redacted]	[Redacted]
	ENGINE	
[Redacted]		
Made in England		
82009127		

### Tractor Identification - Figure 2

The serial number and model identification information is stamped on the top of the front support (1). These numbers are also repeated on the vehicle identification plate reproduced above.

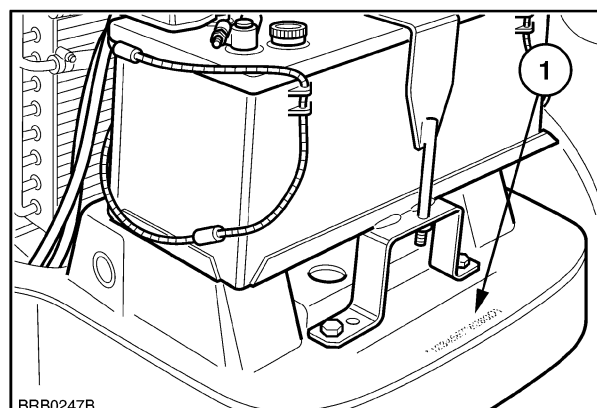


2

**Engine Identification - Figure 3**


The engine serial number and date code are stamped on a lug (1) Figure 3, protruding from the rear, right-hand side of the engine. This information is repeated on the emission control decal located on the engine valve cover, and on the vehicle identification plate reproduced on page 1-2.

Engine Serial No. \_\_\_\_\_

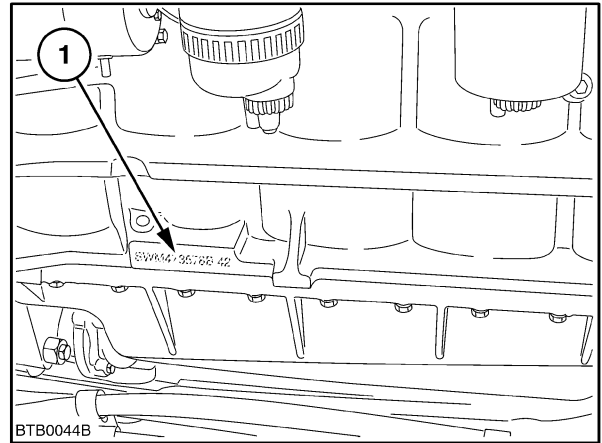**3****Driveline Identification - Figure 4**


The serial number (1) is stamped on the right-hand side of the transmission housing. This information is repeated on the vehicle identification plate (Figure 1). Record the information below for quick reference.

Driveline Serial No. \_\_\_\_\_

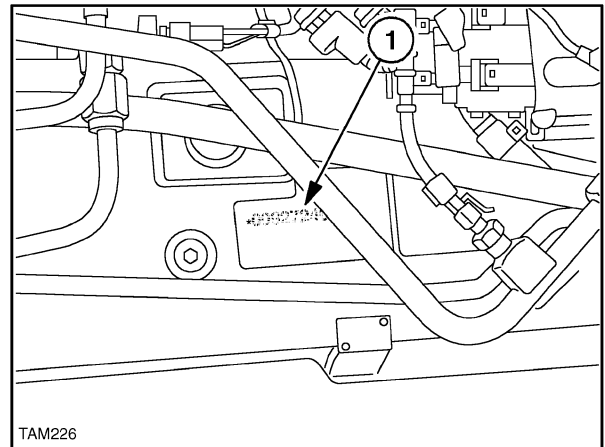**4****Cab Identification - Figure 5**

The cab serial number and other information is on the OECD certification plate (1) on the inner surface of the left-hand crossrail, beneath the windscreen. Record the cab serial number below for quick reference.

Cab Serial No. \_\_\_\_\_

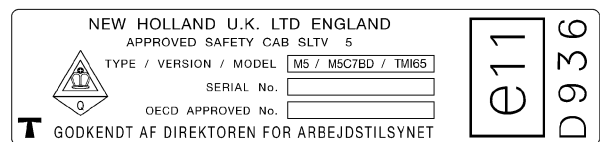**5**

## ECOLOGY AND THE ENVIRONMENT

Soil, air and water are vital factors of agriculture and life in general. Where legislation does not yet rule the treatment of some of the substances which are required by advanced technology, common sense should govern the use and disposal of products of a chemical and petrochemical nature.

The following are recommendations which may be of assistance:

- Become acquainted with and ensure that you understand the relative legislation applicable to your country.
- Where no legislation exists, obtain information from suppliers of oils, filters, batteries, fuels, anti freeze, cleaning agents, etc., with regard to their effect on man and nature and how to safely store, use and dispose of these substances. Agricultural consultants will, in many cases, be able to help you as well.

### HELPFUL HINTS

1. Avoid filling tanks using jerrycans or inappropriate pressurised fuel delivery systems which may cause considerable spillage.
2. In general, avoid skin contact with all fuels, oils, acids, solvents, etc. Most of them contain substances which can be harmful to your health.

3. Modern oils contain additives. Do not burn contaminated fuels and/or waste oils in ordinary heating systems.

4. Avoid spillage when draining off used engine coolant mixtures, engine, gearbox and hydraulic oils, brake fluids, etc. Do not mix drained brake fluids or fuels with lubricants. Store them safely until they can be disposed of in a proper way to comply with local legislation and available resources.

5. Modern coolant mixtures, i.e. antifreeze and other additives, should be replaced every two years. They should not be allowed to get into the soil but should be collected and disposed of safely.

6. Do not open the air-conditioning system yourself. It contains gases which should not be released into the atmosphere. Your dealer or air conditioning specialist has a special extractor for this purpose and will have to recharge the system anyway.

7. Repair any leaks or defects in the engine cooling or hydraulic system immediately.

8. Do not increase the pressure in a pressurised circuit as this may lead to the components exploding.

9. Protect hoses during welding as penetrating weld splatter may burn a hole or weaken them, causing the loss of oils, coolant, etc.

## SAFETY PRECAUTIONS

A careful operator is the best operator. Most accidents can be avoided by observing certain precautions. To help prevent accidents, read and take the following precautions **before** driving, operating or servicing the tractor. Equipment should be operated only by those who are responsible and instructed to do so.

### PRECAUTIONARY STATEMENTS

Throughout this Manual you will see text in *italics*, preceded by the words **NOTE**, **ATTENTION**, **IMPORTANT**, **CAUTION**, **WARNING** or **DANGER**. Such text has the following significance:

#### Machine Safety

**NOTE:** *This text stresses a correct operating technique or procedure.*

**ATTENTION:** *This text warns the operator of potential machine damage if a certain procedure is not followed.*

**IMPORTANT:** *This text informs the reader of something that he needs to know to prevent minor machine damage if a certain procedure is not followed.*

#### Personal Safety



**CAUTION:** *The word CAUTION is used where a safe behavioural practice, according to operating and maintenance instructions and common safety practices will protect the operator and others from accident involvement.*



**WARNING:** *The word WARNING denotes a potential or hidden hazard which could possibly cause serious injury. It is used to warn operators and others to exercise due care and attention to avoid a surprise accident with machinery.*




**DANGER:** *The word DANGER denotes a forbidden practice in connection with a serious hazard.*

*Failure to follow the CAUTION, WARNING and DANGER instructions may result in serious bodily injury or even death.*

### THE TRACTOR

1. Read the Operator's Manual carefully before using the tractor. Lack of operating knowledge can lead to accidents.
2. Only allow properly trained and qualified persons to operate the tractor.
3. To prevent falls, use the handrails and step plates when getting on and off the tractor. Keep steps and platform clear of mud and debris.
4. Replace all missing, illegible or damaged safety decals.
5. Keep safety decals free of dirt or grime.

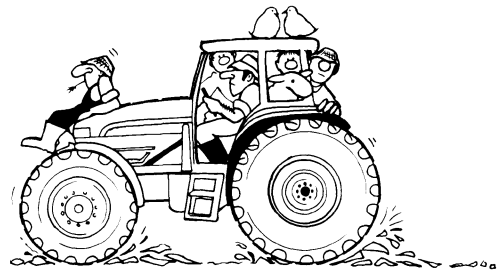

6. Do not permit anyone but the operator to ride on the tractor unless a passenger seat is fitted. There is no safe place for extra passengers otherwise.
7. Keep children away from the tractor and farm machinery at all times.
8. Do not modify or alter or permit anyone else to modify or alter the tractor or any of its components or any tractor function without first consulting your dealer.
9. Install all guards before starting the engine or operating the tractor.

### DRIVING THE TRACTOR

1. Always sit in the driver's seat while starting or driving the tractor.
2. When driving on public roads, have consideration for other road users. Pull in to the side of the road occasionally to allow any following traffic to pass. Do

not exceed the legal speed limit set in your country for agricultural tractors.

3. Use a rotating beacon when driving on public roads to indicate that the vehicle is slow moving and is a possible hazard.


4. Dip the tractor lights when meeting a vehicle at night. Make sure the lights are adjusted to prevent blinding the driver of an oncoming vehicle.

5. Reduce speed before turning or applying the brakes. Brake both wheels simultaneously when making an emergency stop. Ensure that both brake pedals are locked together when travelling at road speeds or when on public roads to ensure correct operation of trailer brakes, balanced operation of the tractor brakes and four wheel braking (4WD tractors only).



6. On four wheel drive tractors, the drive to the front axle is automatically engaged, to provide four wheel braking, when both footbrakes are applied. Owners should be aware of the effectiveness of four wheel braking which greatly enhances braking performance. Appropriate care should be exercised during fierce braking.

7. Use extreme caution and avoid hard application of the tractor brakes when towing heavy loads at road speeds.

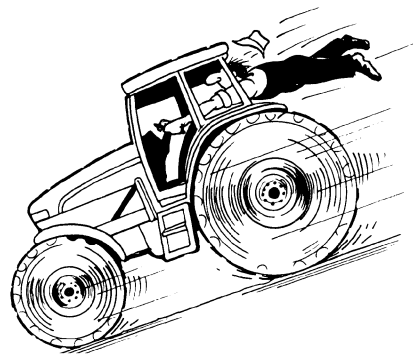


8. Keep the tractor in the same gear when going downhill as would be used when going uphill. Do not coast or freewheel down hills.

9. Any towed vehicle whose total weight exceeds that of the towing tractor must be equipped with brakes for safe operation.

10. Never apply the differential lock when turning. When engaged, the differential lock will prevent the tractor from turning.

11. Always check overhead clearance, especially when transporting the tractor. Watch where you are going, especially at row ends, on roads and around trees and low overhanging obstacles.

12. To avoid overturns, drive the tractor with care and at speeds compatible with safety, especially when operating over rough ground, when crossing ditches or slopes and when turning corners.

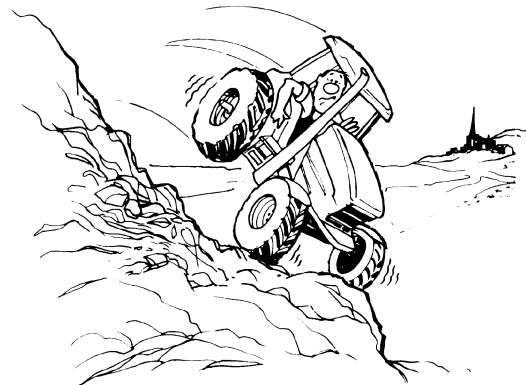

13. Use extreme caution when operating on steep slopes.

14. If the tractor becomes stuck or the tyres are frozen to the ground, reverse the tractor out to prevent overturning.



## OPERATING THE TRACTOR

1. Apply the parking brake, place the P.T.O. control in the 'OFF' position, the lift control lever in the down position, the remote control valve levers in the neutral position and the transmission levers in neutral before starting the tractor.

2. Do not start the engine or operate controls (other than externally mounted hydraulic lift or P.T.O. switches, if fitted) while standing beside the tractor. Always sit in the tractor seat when starting the engine or operating the controls.

3. Do not bypass the transmission neutral start switches. Consult your authorised dealer if your neutral start controls malfunction. Use jump leads only in the recommended manner. Improper use can result in a tractor runaway.




4. Avoid accidental contact with the gear shift levers while the engine is running. Unexpected tractor movement can result from such contact.

5. Do not get off the tractor while it is in motion.

6. If the power steering or engine ceases operating, stop the tractor immediately as the tractor will be more difficult to control.

7. Before leaving the tractor, park the tractor on level ground, apply the parking brake, lower attached implements to the ground, disengage the P.T.O. and stop the engine.

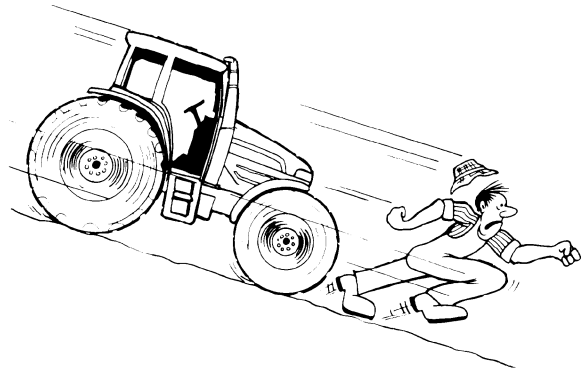

8. Do not park the tractor on a steep incline.


9. The cab is designed to provide the minimum noise level at the operator's ears and meets or exceeds applicable standards in this respect. However, noise (sound pressure level) in the workplace can exceed 85 dB(A) when working between buildings or in confined spaces, with cab windows open. Therefore, it is recommended that operators wear suitable ear protectors when operating in high noise level conditions.



10. Do not run the tractor engine in an enclosed building without adequate ventilation. Exhaust fumes are toxic and can cause death.

11. Pull only from the pick-up hitch, swinging drawbar or the lower link drawbar in the lowered position. Use only a drawbar pin that locks in place. Pulling from the tractor rear axle or any point above the axle may cause the tractor to overturn.

12. Always select Position Control when attaching equipment and when transporting equipment. Be sure hydraulic couplers are properly mounted and will disconnect safely in case of accidental detachment of the implement.

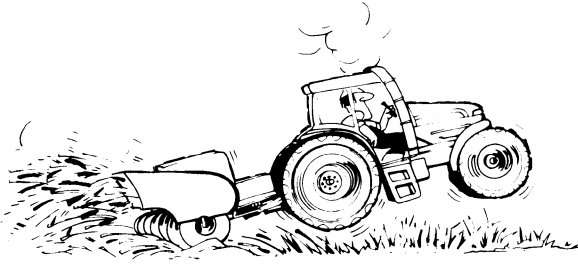

13. If the front end of the tractor tends to rise when heavy implements are attached to the three-point hitch, install front end or front wheel weights. Do not operate the tractor with a light front end.

14. Engage the clutch slowly when driving out of a ditch, gully or up a steep hillside. Disengage the clutch promptly if the front wheels rise off the ground.

15. Ensure any attached equipment or accessories are correctly installed, are approved for use with the tractor, do not overload the tractor and are operated and maintained in accordance with the instructions issued by the equipment or accessory manufacturer.

16. Remember that your tractor, if abused or incorrectly used, can be dangerous and become a hazard both to the operator and to bystanders. Do not overload or operate with attached equipment which is unsafe, not designed for the particular task or is poorly maintained.


17. Do not leave equipment in the raised position when the vehicle is stopped or unattended.

18. Do not drive equipment near open fires.

19. Always wear a protective mask when working with toxic spray chemicals. Follow the directions on the chemical container.

## OPERATING THE P.T.O.

1. When operating P.T.O.- driven equipment, shut off the engine, switch off the P.T.O. and wait until the P.T.O. stops before getting off the tractor and disconnecting the equipment.

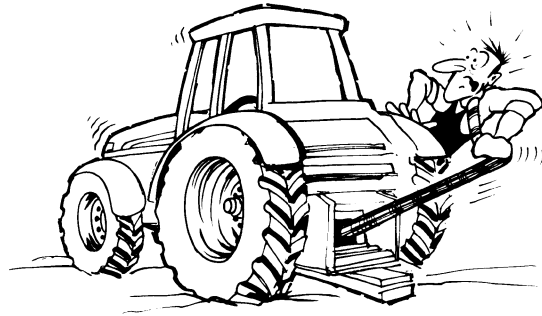

2. Do not wear loose clothing when operating the power take-off or especially when near rotating equipment.

3. When operating stationary P.T.O.-driven equipment, always apply the tractor parking brake and block the rear wheels front and back.



4. To avoid injury, do not clean, adjust, unclog or service P.T.O. driven equipment when the tractor engine is running. Ensure that the P.T.O. is switched off.

5. Make sure the P.T.O. guard is in position at all times and always replace the P.T.O. cap when the P.T.O. is not in use.

**SERVICING THE TRACTOR**

1. The cooling system operates under pressure which is controlled by the expansion tank cap. It is dangerous to remove the cap while the system is hot. Always turn the cap slowly to the first stop and allow the pressure to escape before removing the cap entirely. Never remove the cap from the top of the radiator unless the expansion tank pressure cap has first been removed.

2. Do not smoke while refuelling the tractor. Keep any type of open flame away.

3. Keep the tractor and equipment, particularly brakes and steering, maintained in a reliable and satisfactory condition to ensure your safety and comply with legal requirements.

4. To prevent fire or explosion, keep open flames away from battery or cold weather starting aids. To prevent sparks which could cause explosion, use jumper cables according to instructions.

5. Do not attempt to service the air conditioning system. It is possible to be severely frost bitten or injured by escaping refrigerant. Special equipment and instruments are required to service the air conditioning system. See your authorised dealer for service.


6. Stop the engine before performing any service on the tractor.

7. Hydraulic fluid and fuel oil in the injection system operate under high pressure. Escaping hydraulic fluid or fuel oil under pressure can penetrate the skin

causing serious injury. Unqualified persons should not remove or attempt to adjust a pump, injector, nozzle or any other part of the fuel injection or hydraulic systems. Failure to follow these instructions can result in serious injury.

- Do **not** use your hand to check for leaks. Use a piece of cardboard or paper to search for leaks.

- Stop the engine and relieve pressure before connecting or disconnecting lines.

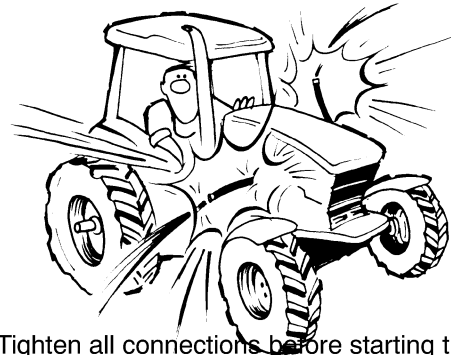

- Tighten all connections before starting the engine or pressurising lines.

- If fluid is injected into the skin obtain medical attention immediately or gangrene may result.

8. Do not modify or alter or permit anyone else to modify or alter the tractor or any of its components or any tractor function without first consulting an authorised dealer.

9. Continuous long term contact with used engine oil may cause skin cancer. Avoid prolonged contact with used engine oil. Wash skin promptly with soap and water.

10. Keep equipment clean and properly maintained.

11. Dispose of all drained fluids and removed filters properly.

12. Tractor wheels are very heavy. Handle with care and ensure, when stored, that they cannot topple and cause injury.

**DIESEL FUEL**

1. Under no circumstances should gasoline, alcohol or blended fuels be added to diesel fuel. These combinations can create an increased fire or explosive hazard. In a closed container such as a fuel tank these blends are more explosive than pure gasoline. Do not use these blends.

2. Never remove the fuel cap or refuel with the engine running or hot.



3. Do not smoke while refuelling the tractor or when standing near fuel. Keep any type of open flame away.

4. Maintain control of the fuel filler pipe nozzle when filling the tank.

5. Do not fill the fuel tank to capacity. Fill only to the bottom of the filler neck to allow room for expansion.

6. Wipe up spilled fuel immediately.

7. Always tighten the fuel tank cap securely.

8. If the original fuel tank cap is lost, replace it with an approved cap. A non-approved cap may not be safe.

9. Never use fuel for cleaning purposes.

10. Arrange fuel purchases so that summer grade fuels are not held over and used in the winter.

**SAFETY CAB**

Your tractor is equipped with a safety cab which must be maintained in a serviceable condition. Be careful when driving through doorways or working in confined spaces with low headroom.

1. Do not modify, drill, weld or alter the safety cab in any way. Doing so could render you liable to legal prosecution in some countries.

2. Never attempt to straighten or weld any part of the main frame or retaining brackets which have suffered damage. By doing so you may weaken the structure and endanger your safety.

3. Do not secure any parts on the main frame or attach your safety cab with other than the special high tensile bolts and nuts specified.


4. Never attach chains or ropes to the cab or main frame for pulling purposes.


5. Never take unnecessary risks even though your safety cab affords you the maximum protection possible.

Whenever you see this symbol  it means: **ATTENTION!**  
**BECOME ALERT! YOUR SAFETY IS INVOLVED!**

## SAFETY DECALS


The decals reproduced on the following pages were installed on your tractor in the positions indicated in the drawings below. They are intended for your safety and for those working with you. Please take this Manual and walk around your tractor, noting the location of the decal and their significance. Review the decals and operating instructions detailed in this Manual with the machine operators. Keep the decals clean and legible. If they become damaged or illegible, obtain replacements from your authorised dealer.

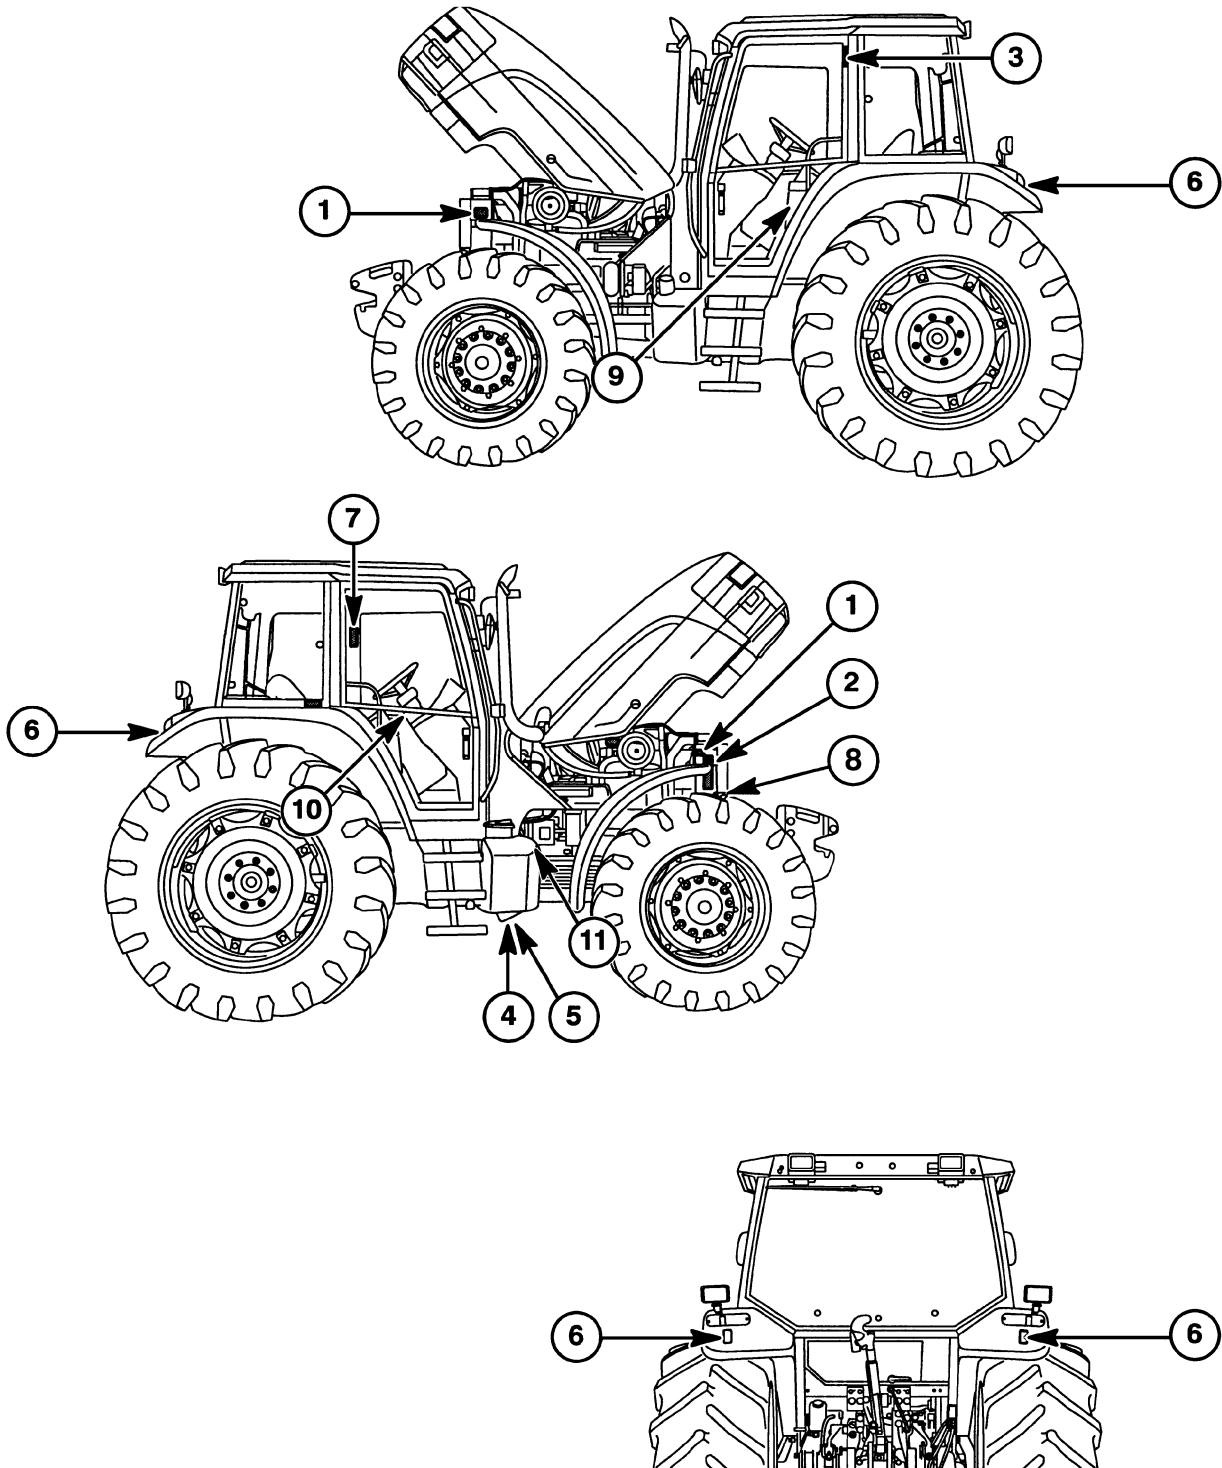

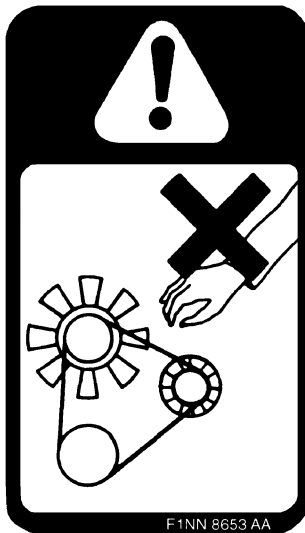


**1. Location: Left- and right-hand side of radiator**

To prevent serious injury, keep hands and clothing away from rotating fan and drive belt.

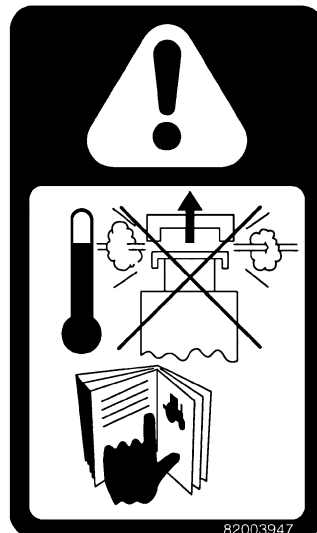

**2. Location: Right-hand side of radiator and coolant overflow bottle**

Warning! Pressurised cooling system. Allow to cool then remove cap carefully. Using a cloth, turn cap to the first stop and allow pressure to subside before removing cap completely.

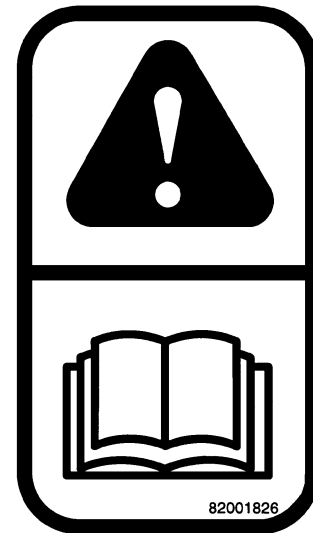


**3. Location: Right-hand 'B' pillar, inside cab**

General warning. Read and understand all the warning notes printed in this Operator's Manual. In particular, see pages 1–5 to 1–10 inclusive.




**4. Location: Radar sensor mounting bracket (North America only.)**

To avoid possible eye damage from micro-wave signals emitted by the radar sensor, do not look directly into the sensor face.

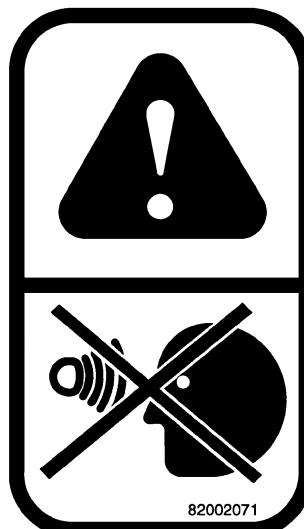

**5. Location: Radar sensor mounting bracket (all countries except North America)**

To avoid possible eye damage from micro-wave signals emitted by the radar sensor, do not look directly into the sensor face.

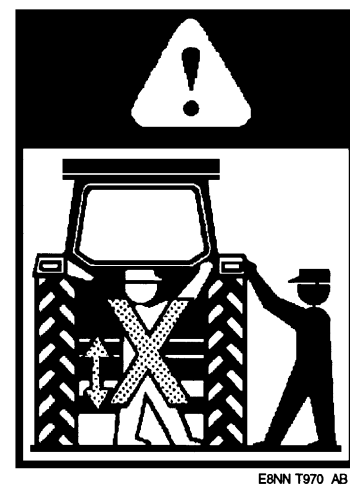

**6. Location: Rear of both fenders (with external power lift controls only)**

To avoid injury, do not stand on the implement or between the implement and tractor while operating the external lift controls.

Thank you so much for reading.  
Please click the “Buy Now!”  
button below to download the  
complete manual.



After you pay.

You can download the most  
perfect and complete manual in  
the world immediately.

Our support email:

[ebooklibonline@outlook.com](mailto:ebooklibonline@outlook.com)