

D35, D40, D45 Tractors

Operator's Manual

86617826




TO THE OWNER:

This manual contains information concerning the operation, adjustment, and maintenance of the Models D35, D40 and D45. You have purchased a dependable machine, but only by proper care and operation can you expect to receive the performance and long service built into this tractor. Please have all operators read this manual carefully and keep the manual available for ready reference.

Your dealer will instruct you in the general operation of your tractor. (Refer to the "Delivery Report" at the back of this manual.) Your dealer's staff of factory-trained service technicians will be glad to answer any questions that may arise regarding the operation of your tractor.

Your dealer carries a complete line of genuine Case IH parts. These parts are manufactured and carefully inspected to insure high quality and accurate fitting of any necessary replacement parts.

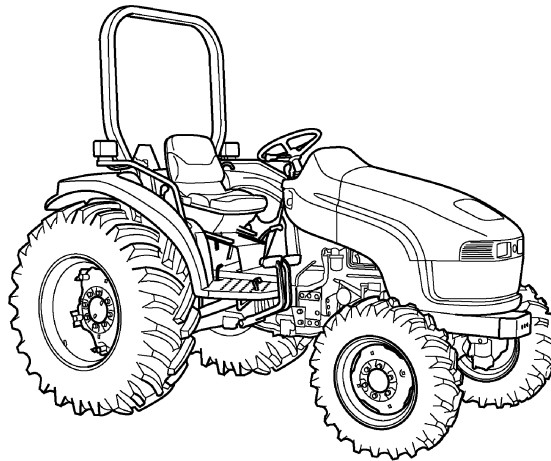

CAUTION: THIS SYMBOL IS USED THROUGHOUT THIS BOOK WHENEVER PERSONAL SAFETY IS INVOLVED. TAKE TIME TO READ AND FOLLOW THE INSTRUCTIONS. BE CAREFUL!

CAUTION: PICTURES IN THIS MANUAL MAY SHOW PROTECTIVE SHIELDING OPEN OR REMOVED TO BETTER ILLUSTRATE A PARTICULAR FEATURE OR ADJUSTMENT.

BE CERTAIN, HOWEVER, TO CLOSE OR REPLACE ALL SHIELDING BEFORE OPERATING THE MACHINE.

IMPROVEMENTS

Case IH is continually striving to improve its products. We reserve the right to make improvements or changes when it becomes practical and possible to do so, without incurring any obligation to make changes or additions to the equipment sold previously.

FEDERAL EMISSIONS WARRANTY

Case IH warrants that your new 1996 and later heavy-duty off-road diesel engine was designed, built, and equipped to conform to applicable U.S. Environmental Protection Agency regulations for a period of use of five years or 3,000 hours of operation, whichever occurs first.

The new model year, class of diesel engine, and emission application determination for your engine are identified on the emission control information label affixed to the top of your engine's rocker arm cover. The warranty period begins on the date the new equipment is sold to the first retail purchaser.

Any emission control system parts which are proven defective during normal use will be repaired or replaced during the warranty period. The warranty repairs and service will be performed by any authorized Case IH dealer at the dealer's place of business, with no charge for parts or labor (including diagnosis).

As the engine owner, you are responsible to perform all the required maintenance listed in your owner's manual. Case IH will not deny an emission warranty claim solely because you have no record of maintenance; however, a claim may be denied if your failure to perform maintenance resulted in the failure of a warranted part. Receipts covering regular maintenance should be retained in the event of questions and these receipts should be passed on to each subsequent owner of the engine.

It is recommended replacement parts used for maintenance or repairs be Case IH Service Parts to maintain the quality originally designed into your emission certified engine. The use of non-Case IH parts does not invalidate the warranty on other components unless the use of such parts causes damage to warranted parts.

Case IH wishes to assure the emission control systems warranty is being properly administered. If you believe you have not received the service entitled to under this warranty, you should contact the nearest Case IH regional Office for assistance. If additional assistance or information is needed, contact:

Case Corporation
700 W State St.
Racine, WI 53404

Please note that the Emission Warranty does not cover:

1. Systems and parts that were not first installed on the new equipment or engine as original equipment by Case IH.
2. Part malfunctions caused by abuse, misuse, improper adjustment, modification, alteration, tampering, disconnection, improper or inadequate maintenance, or use of non-recommended fuels and lubricating oils.
3. Accident caused damage, acts of nature, or other events beyond Case IH's control.
4. Replacement of expendable items made in connection with scheduled maintenance.
5. Parts requiring replacement, inspection or adjustment maintenance intervals for reasons other than being defective.
6. Parts which are not Case IH Service Parts.
7. Loss of time, inconvenience, loss of use of equipment/engine or commercial loss.
8. Equipment with altered or disconnected hourmeter where the hours cannot be determined.
9. Equipment normally operated outside the United States.
10. Non-defective parts replaced by other than Case IH dealers.

Coverage

This emission control system warranty applies to the following emission control parts.

Fuel Injection Pump
Fuel Injectors
Intake Manifold
Exhaust Manifold

CONTENTS

SAFETY	0-4
SECTION 1 - GENERAL INFORMATION	1-1
SECTION 2 - OPERATION	2-1
SECTION 3 - LUBRICATION AND MAINTENANCE	3-1
SECTION 4 - SPECIFICATIONS	4-1
INDEX	4-15
PRE-DELIVERY SERVICE	4-17

PRECAUTIONARY STATEMENTS

PERSONAL SAFETY

Throughout this manual and on machine decals, you will find precautionary statements (“CAUTION”, “WARNING”, and “DANGER”) followed by specific instructions. These precautions are intended for the personal safety of you and those working with you. Please take the time to read them.



CAUTION: THE WORD “CAUTION” IS USED WHERE A SAFE BEHAVIORAL PRACTICE ACCORDING TO OPERATING AND MAINTENANCE INSTRUCTIONS AND COMMON SAFETY PRACTICES WILL PROTECT THE OPERATOR AND OTHERS FROM ACCIDENT INVOLVEMENT.



WARNING: THE WORD “WARNING” DENOTES A POTENTIAL OR HIDDEN HAZARD WHICH HAS A POTENTIAL FOR SERIOUS INJURY. IT IS USED TO WARN OPERATORS AND OTHERS TO EXERCISE EVERY APPROPRIATE MEANS TO AVOID A SURPRISE INVOLVEMENT WITH MACHINERY.



DANGER: THE WORD “DANGER” DENOTES A FORBIDDEN PRACTICE IN CONNECTION WITH A SERIOUS HAZARD.

FAILURE TO FOLLOW THE “CAUTION”, “WARNING”, AND “DANGER” INSTRUCTIONS MAY RESULT IN SERIOUS BODILY INJURY OR DEATH.

MACHINE SAFETY

Additional precautionary statements (“ATTENTION” and “IMPORTANT”) are followed by specific instructions. These statements are intended for machine safety.

ATTENTION: The word “ATTENTION” is used to warn the operator of potential machine damage if a certain procedure is not followed.

IMPORTANT: The word “IMPORTANT” is used to inform the reader of something he needs to know to prevent minor machine damage if a certain procedure is not followed.



SAFETY PRECAUTIONS

A careful operator is the best operator. Most accidents can be avoided by observing certain precautions. To help prevent accidents, read and take the following precautions before operating this tractor. Equipment should be operated only by those who are responsible and instructed to do so.

THE TRACTOR

1. Read the Operator's Manual carefully before using the tractor. Lack of operating knowledge can lead to accidents.
2. Use an approved roll bar and seat belt for safe operation. Overturning a tractor without a roll bar can result in death or injury. If your tractor is not equipped with a roll bar and seat belt, see your Dealer for needed installation.
3. Always use the seat belt. The only instance when the seat belt should not be used is if the roll bar has been removed from the tractor or folding ROPS is in down position.
4. If a front end loader is to be installed, always use a FOPS (Falling Object Protective Structure) canopy to avoid injury from falling objects.
5. Use the handholds and step plates when getting on and off the tractor to prevent falls. Keep steps and platform cleared of mud and debris.
6. Do not permit anyone but the operator to ride on the tractor. There is no safe place for extra riders.
7. Keep all safety decals clean of dirt and grime, and replace all missing, illegible, or damaged safety decals. See the list of decals in the Decal section of this manual.

SERVICING THE TRACTOR

1. The cooling system operates under pressure which is controlled by the radiator cap. It is dangerous to remove the cap while the system is hot. Always turn the cap slowly to the first stop and allow pressure to escape before removing the cap entirely.
2. Keep any type of open flame away from the tractor and do not smoke while refueling. Wait for the engine to cool before refueling.

3. Keep the tractor and equipment, particularly brakes and steering, maintained in a reliable and satisfactory condition to ensure your safety and comply with legal requirements.
4. Keep open flame or cold weather starting aids away from the battery to prevent fires or explosions. Use jumper cables according to instructions to prevent sparks which could cause explosion.
5. Stop the engine before performing any service on the tractor.
6. Escaping hydraulic/diesel fluid under pressure can penetrate the skin causing serious injury. If fluid is injected into the skin, obtain medical attention immediately or gangrene may result.
 - DO NOT use your hand to check for leaks. Use a piece of cardboard or paper to search for leaks.
 - Stop the engine and relieve pressure before connecting or disconnecting lines.
 - Tighten all connections before starting the engine or pressurizing lines.
7. Do not modify or permit anyone else to modify or alter this tractor or any of its components or functions without first consulting a Dealer.
8. The fuel oil in the injection system is under high pressure and can penetrate the skin. Unqualified persons should not remove or attempt to adjust a pump, injector, nozzle, or any other part of the fuel injection system. Failure to follow these instructions can result in serious injury.
9. Continuous long-term contact with used engine oil may cause skin cancer. Avoid prolonged contact with used engine oil. Wash skin promptly with soap and water.
10. Some components of your tractor, such as gaskets and friction surfaces (brake linings, clutch linings, etc.) may contain asbestos. Breathing asbestos dust is dangerous to your health. You are advised to have any maintenance or repair on such components carried out by an authorized Dealer.

However, if service operations are to be undertaken on parts that contain asbestos, the essential precautions listed below must be observed:

- Work out of doors or in a well ventilated area.
- Dust found on the tractor or produced during work on the tractor should be removed by extraction, not by blowing.
- Dust waste should be dampened, placed in a sealed container, and marked to ensure safe disposal.
- If any cutting, drilling, etc. is attempted on materials containing asbestos, the item should be dampened and only hand tools or low speed power tools used.

OPERATING THE TRACTOR

1. Before starting the tractor, apply the parking brake, place the PTO lever in the "OFF" position, the lift control lever in the down position, the remote control valve levers in the neutral position, and the transmission in neutral.
2. Always sit in the tractor seat when starting the engine or operating controls. Do not start the engine or operate controls while standing beside the tractor.
3. Do not bypass the neutral start switches. Consult your Dealer if your neutral start controls malfunction. Use jumper cables only in the recommended manner. Improper use can result in tractor runaway.
4. Avoid accidental contact with the gear shift lever while the engine is running, as this can cause unexpected tractor movement.
5. Before getting off the tractor, disengage the PTO, turn the engine off, and apply the parking brake. Never get off the tractor while it is in motion.
6. Do not park the tractor on a steep incline.
7. Do not operate the tractor engine in an enclosed building without adequate ventilation. Exhaust fumes can cause death or illness.
8. If the power steering or engine ceases operating, stop the tractor immediately.
9. Pull only from the drawbar or the lower link drawbar in the down position. Use only a drawbar pin that locks in place. Pulling from the tractor rear axle or any point above the axle may cause the tractor to upset.
10. If the front end of the tractor tends to rise when heavy implements are attached to the three-point hitch, install front end or front wheel weights. Do not operate the tractor with a light front end.
11. Always set the hydraulic selector lever in position control when attaching or transporting equipment. Ensure hydraulic couplers are properly mounted and will disconnect safely in case of accidental detachment of implement.
12. Do not leave equipment in the raised position.
13. Use the flasher/turn signal lights and SMV signs when traveling on public roads both day and night (unless prohibited by law).
14. When operating at night, adjust lights to prevent blinding oncoming drivers.

DRIVING THE TRACTOR

1. Watch where you are going, especially at row ends, on roads, around trees and low hanging obstacles.
2. To avoid upsets, drive the tractor with care and at a safe speed. Use extra caution when operating over rough ground, when crossing ditches or slopes, and when turning corners.
3. To provide two-wheel braking, lock tractor brake pedals together when transporting on roads.
4. Do not coast or free wheel down hills. Use the same gear when going downhill as is used when going uphill.
5. Any towed vehicle with a total weight exceeding that of the towing tractor should be equipped with brakes for safe operation.
6. If the tractor becomes stuck or the tires become frozen to the ground, back up the tractor to prevent upset.
7. Always check overhead clearance, especially when transporting the tractor.
8. When operating at night, adjust lights to prevent blinding oncoming drivers.

OPERATING THE PTO

1. When operating PTO driven equipment, shut off the engine and wait until the PTO stops before getting off the tractor and disconnecting the equipment.

-
2. Do not wear loose clothing when operating the power take-off or when near rotating equipment.
 3. When operating stationary PTO driven equipment, always place all three gear shift levers in neutral position:
 - Main shift lever
 - Shuttle shift lever
 - Range shift lever
- Apply the tractor parking brake, and block the rear wheels front and back.
4. To avoid injury, do not clean, adjust, unclog, or service PTO driven equipment when the tractor engine is running.
 5. Ensure the PTO master shield is installed at all times. Always replace the PTO shield cap when the PTO is not in use.

DIESEL FUEL

1. UNDER NO CIRCUMSTANCES should gasoline, alcohol, or blended fuels be added to diesel fuel. These combinations can create an increased fire or explosive hazard. Such blends are more explosive than pure gasoline in a closed container such as a fuel tank. **DO NOT USE THESE BLENDS.**
2. Never remove the fuel cap or refuel with the engine running or hot.
3. Do not smoke while refueling or when standing near fuel.
4. Maintain control of the fuel filler pipe nozzle when filling the tank.
5. Do not fill the fuel tank to capacity. Allow room for expansion.
6. Wipe up spilled fuel immediately.

7. Always tighten the fuel tank cap securely.
8. If the original fuel tank cap is lost, replace it with a Case IH approved cap. A non-approved, proprietary cap may not be safe.
9. Keep equipment clean and properly maintained.
10. Do not drive equipment near open fires.
11. Never use fuel for cleaning purposes.
12. Arrange fuel purchases so that winter grade fuels are not held over and used in the spring.

SAFETY FRAME (ROPS)

Your tractor is equipped with a safety frame. It must be maintained in a serviceable condition. Be careful when driving through doorways or working in confined spaces with low headroom.

UNDER NO CIRCUMSTANCES should you:

- modify, drill, or alter the safety frame in any way. Doing so may render you liable to legal prosecution. Doing so may weaken the structure and endanger your safety.
- attempt to straighten or weld any part of the main frame or retaining brackets which have suffered damage. Doing so may weaken the structure and endanger your safety.
- secure any parts on the main frame or attach your safety frame with anything other than the special high tensile bolts and nuts specified.
- attach chains or ropes to the main frame for pulling purposes.
- take unnecessary risks even though your safety frame affords you the maximum protection possible.



WHEN YOU SEE THIS SYMBOL

IT MEANS:

ATTENTION!

BECOME ALERT!

YOUR SAFETY IS INVOLVED!


DECALS

If safety or instruction decals become damaged or illegible, new decals should be obtained from your Dealer and placed at their original positions.


SAFETY DECALS



WARNING: Pull Only From Drawbar
 PART NO: 86532904
 LOCATION: PTO Shield

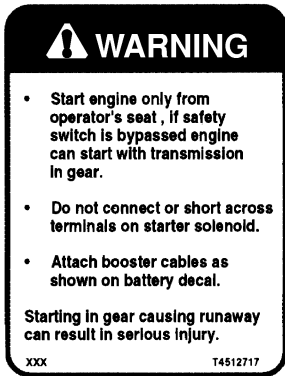

WARNING: Start Engine Only From Operator's Seat
 PART NO: 86532906
 LOCATION: On the Starter Motor

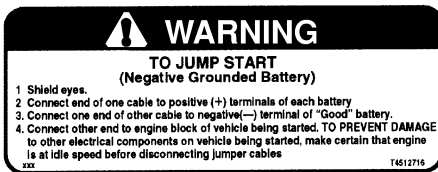


WARNING: To Jump Start
 PART NO: 86532905
 LOCATION: Front of Coolant Overflow Tank



DANGER: ROPS
 PART NO: 86543805
 LOCATION: Top under side of ROPS



WARNING: Rotating Fan and Belts
 PART NO: 86532907
 LOCATION: Both Sides of Radiator

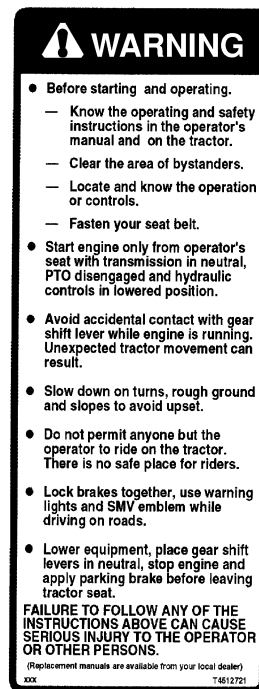

WARNING: Before Starting and Operating
 PART NO: 86401125
 LOCATION: Left Console Panel

INSTRUCTION DECALS



Front-Wheel Drive
Control Lever
PART NO: 86400177
LOCATION: Left Fender



Position Control Lever
PART NO: 86567896
LOCATION: Right-Hand
Quadrant




Operating Remote Control
Valve-Single Spool
PART NO: 86567895
LOCATION: Right-Hand
Fender

PTO Engagement
PART NO: 86567890
LOCATION: Left-Hand
Seat Pan



Range Selector Lever
(Manual)
PART NO: 86567891
LOCATION: Left fender







Hyd. Manifold Operation
 (See Operator's Manual)
 PART NO: 86532914
 LOCATION: Right-Hand Side
 of Hyd. Manifold/Air Filter Cap



Starter Switch
 PART NO: 86400175
 LOCATION: Starter Switch,
 Right Side of Instrument Panel



Engine Oil
 PART NO: 86532916
 LOCATION: Engine Oil
 Filler Cap



Main Shift Lever
 PART NO: 86567892
 LOCATION: Top right of dash



Coupler-Extending
 PART NO: 86532920



Coupler-Retracting
 PART NO: 86532919



Coupler-Extending
 PART NO: 86532921




Coupler-Retracting
 PART NO: 86532922

Forward-Reverse Shuttle
 PART NO: 86567887
 LOCATION: Top Left
 of Dash



Power Steering Fluid
 PART NO: 86532903
 LOCATION: Top of P.S.
 Reservoir

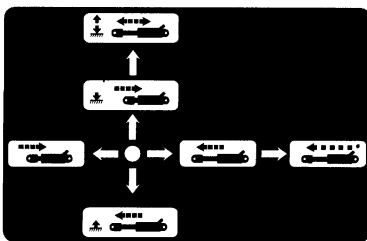


Operating Remote
 Control Valve-
 Double Spool
 PART NO: 86532911
 LOCATION: Cover of
 2-Spool Remote Valve


Lubrication and
 Maintenance Intervals
 PART NO: 86400357
 LOCATION: Inside of Hood

WATCH YOUR PROOF METER HOURS				
Lubrication and maintenance service intervals				
LUBRICATION AND MAINTENANCE ITEM	CHECK	CLEAN	CHANGE	SERVICE INTERVAL
Radiator Coolant	*			Every 10 Hours or Daily
Engine Oil level	*			
Air Cleaner	*			
Transmission Oil Level	*			
Power Steering Oil Level	*			
Front Diff Oil Level	*			
Front Axle Oil Level	*			
Tire	*			
Clutch Pedal	*	*	*	
Battery	*			Every 50 Hours
Lubrication Fittings	*	*	*	
Steering Linkage	*	*	*	
2-Wheel Drive King Pins	*	*	*	
3-point Linkage	*	*	*	
Pivot Shaft	*	*	*	
Brake Pedal	*	*	*	
Drive Shaft Cover	*	*	*	
H.S.T. Foot Pedal Shaft	*	*	*	
Power Steering	*	*	*	
Engine Oil	*	*	*	Every 100 Hours
Fuel Filter	*	*	*	
Air Cleaner	*	*	*	
Engine Oil Filter	*	*	*	
Fuel Filter	*	*	*	Every 200 Hours
Fan Belt	*	*	*	
Brakes	*	*	*	
H.S.T. Filter	*	*	*	Every 300 Hours
Front Axle Oil	*	*	*	
Front Diff Oil	*	*	*	
Hydraulic Filter	*	*	*	
Transmission Oil	*	*	*	
Fuel Injectors	*	*	*	Every 600 Hours
Valve Clearance	*	*	*	
Front Wheel Bearings	*	*	*	
Power Steering Oil	*	*	*	
Radiator Coolant	*	*	*	Seasonal
Air Cleaner Element	*	*	*	

Refer to your Operator's Manual
for additional information.




Flow Control Valve
 PART NO: 86400295
 LOCATION:
 Top of Flow Control Knob



Parking Brake
 PART NO: 86521672
 LOCATION: Right Front
 Deck Platform



Differential Lock
 PART NO: 86532901
 LOCATION: Right Rear
 Deck Platform

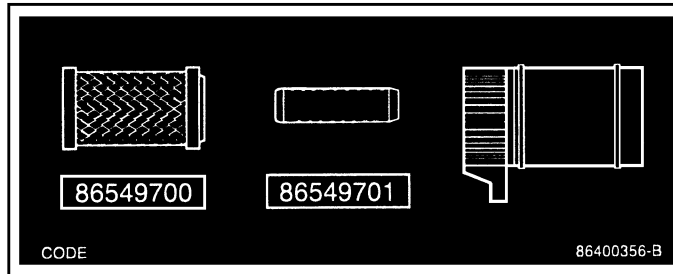

Air Cleaner Maintenance
 PART NO: 86400356
 LOCATION: Air Cleaner Canister




Turn Signal
 PART NO: 86400176
 LOCATION: Top Left Dash



Red Reflective Tape
 PART NO: 86400366
 LOCATION: Back Rear Fender



Throttle
 PART NO: FONN9N848BA
 LOCATION: Top Right Dash

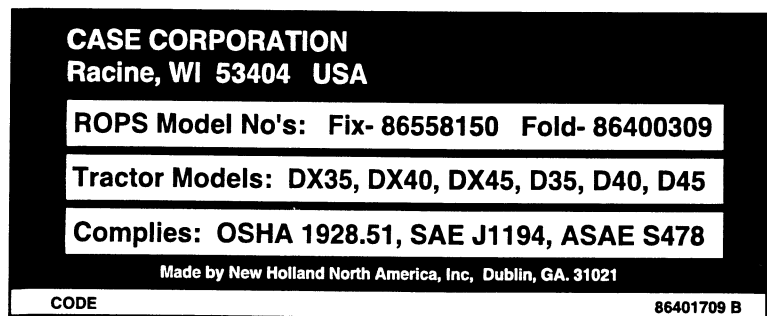

PART NO: 86401709

Thank you so much for reading.
Please click the “Buy Now!”
button below to download the
complete manual.



After you pay.

You can download the most
perfect and complete manual in
the world immediately.

Our support email:

ebooklibonline@outlook.com