



Service Repair Manual

Models

385C L Excavator

Product: EXCAVATOR

Model: 385C L EXCAVATOR T2E

Configuration: 385C L Excavator T2E00001-UP (MACHINE) POWERED BY C-18 Engine

Disassembly and Assembly

385C Excavator and 385C MHPU Mobile Hydraulic Power Unit Machine Systems

Media Number -REN8620-05

Publication Date -01/02/2012

Date Updated -20/02/2012

i02565371

Final Drive - Disassemble

SMCS - 4050-015

Disassembly Procedure

Table 1

| Required Tools | | | |
|----------------|-------------|-----------------------------|-----|
| Tool | Part Number | Part Description | Qty |
| A | 1P-2420 | Transmission Repair Stand | 1 |
| B | 138-7575 | Link Bracket | 3 |
| C | 138-7576 | Link Bracket | 2 |
| D | 132-8119 | Hydraulic Wrench | 1 |
| | 132-8223 | Hydraulic Pump and Motor Gp | 1 |
| | 9U-7418 | Hex Bit Socket | 1 |
| E | 176-6536 | Forcing Bolt | 2 |

Start By:

- A. Remove the final drive. Refer to Disassembly and Assembly, "Final Drive - Remove".

Note: Cleanliness is an important factor. Before you begin the disassembly procedure, the exterior of the components should be thoroughly cleaned. This will help to prevent dirt from entering the internal mechanism. Precision components can be damaged by contaminants or by dirt. Perform disassembly procedures on a clean work surface. Keep components covered and protected at all times.

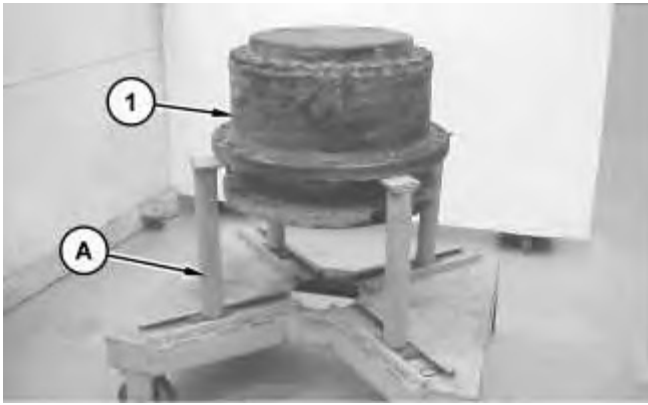


Illustration 1

g01284546

1. Fasten final drive (1) to Tooling (A). Put an alignment mark across the sections of final drive (1) for assembly purposes. All parts must be reinstalled in the original locations. The weight of final drive (1) is approximately 1020 kg (2250 lb).

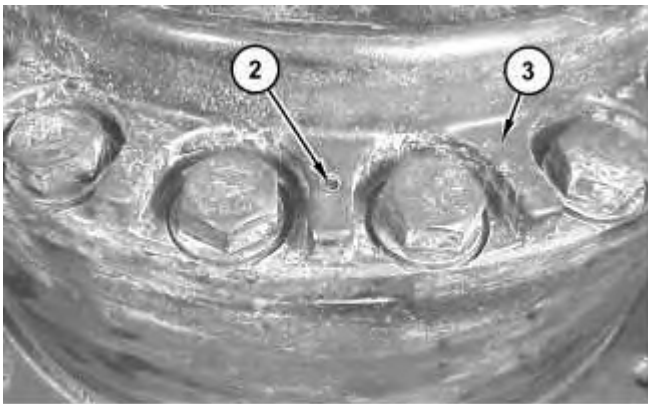


Illustration 2

g01284563

2. Remove socket setscrews (2) from housing cover (3) .



Illustration 3

g01284577

3. Fasten Tooling (B) and a suitable lifting device to housing cover (3) .
4. Remove bolts (4) and the washers. Use a soft faced hammer in order to break the seal between housing cover (3) and the ring gear. Remove housing cover (3). The weight of housing cover (3) is approximately 95 kg (210 lb).

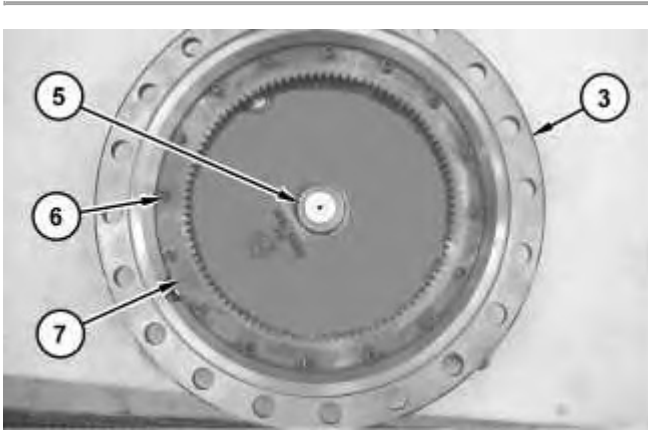


Illustration 4

g01284579

5. Remove spacer (5) and the shims from housing cover (3) .
6. Remove socket head bolts (6) and ring gear (7) from housing cover (3) .

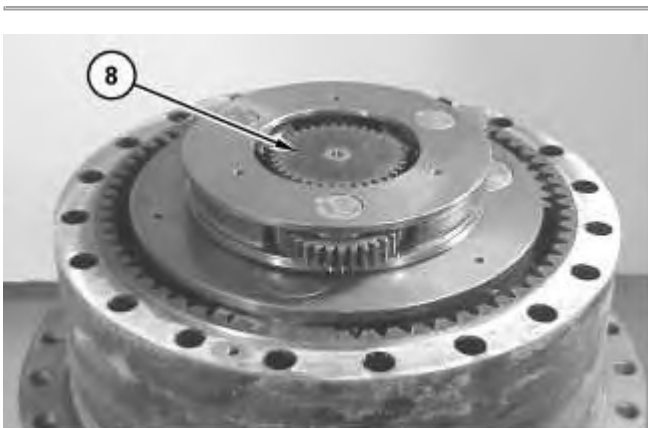


Illustration 5

g01284589

7. Remove sun gear (8) .
-



Illustration 6

g01284593

8. Use Tooling (B) and a suitable lifting device in order to remove carrier assembly (9). The weight of carrier assembly (9) is approximately 43 kg (95 lb).



Illustration 7

g01284596

9. Remove retaining ring (10), spacer (11), and sun gear (12) .

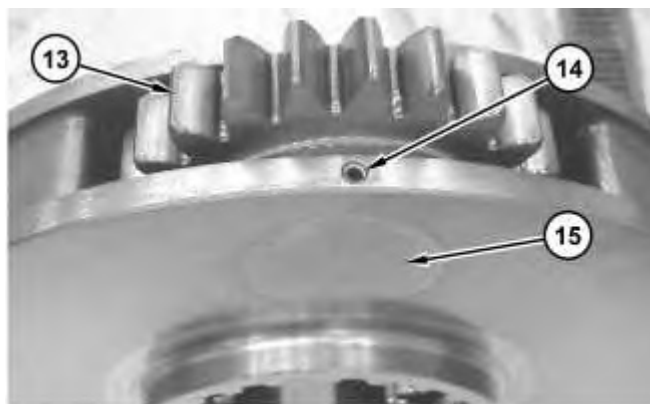


Illustration 8

g01284599

Thank you so much for reading.
Please click the “Buy Now!”
button below to download the
complete manual.



After you pay.

You can download the most
perfect and complete manual in
the world immediately.

Our support email:

ebooklibonline@outlook.com