



Service Repair Manual

Models

305.5E Mini Hydraulic Excavator

Product: MINI HYD EXCAVATOR
Model: 305.5E MINI HYD EXCAVATOR FKY
Configuration: 305.5E Mini Hydraulic Excavator FKY00001-UP (MACHINE)

Disassembly and Assembly 303E CR, 303.5E, 304E, 305.5E and 305E Mini Hydraulic Excavators Machine Systems

Media Number -UENR0148-04

Publication Date -01/10/2016

Date Updated -25/10/2016

i04777978

Front Idler, Recoil Spring and Hydraulic Track Adjuster - Remove

SMCS - 4157-011; 4158-011; 4159-011

Removal Procedure

Table 1

Required Tools			
Tool	Part Number	Part Description	Qty
A	140-7742	Sleeve	1

Start By:

- a. Remove the track.

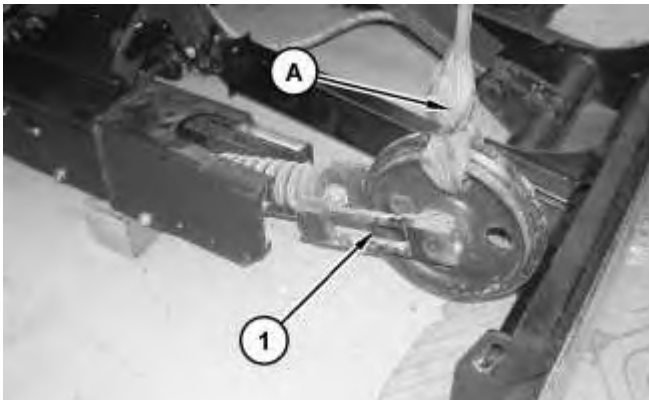


Illustration 1

g01229442

1. Attach Tooling (A) and a suitable lifting device to the front idler, the recoil spring, and hydraulic track adjuster (1). The weight of front idler, recoil spring, and hydraulic track adjuster (1) is approximately 80 kg (175 lb). Remove the front idler, the recoil spring, and hydraulic track adjuster (1).

Product: MINI HYD EXCAVATOR
Model: 305.5E MINI HYD EXCAVATOR FKY
Configuration: 305.5E Mini Hydraulic Excavator FKY00001-UP (MACHINE)

Disassembly and Assembly 303E CR, 303.5E, 304E, 305.5E and 305E Mini Hydraulic Excavators Machine Systems

Media Number -UENR0148-04

Publication Date -01/10/2016

Date Updated -25/10/2016

i06748710

Recoil Spring - Remove and Install

SMCS - 4158-010

Removal Procedure

Table 1

Required Tools			
Tool	Part Number	Part Description	Qty
A	1P-0775	Seal Guide	1
	1P-0510	Driver Gp	1

Start By:

- a. Remove the front idler, recoil spring, and hydraulic track adjuster.
-

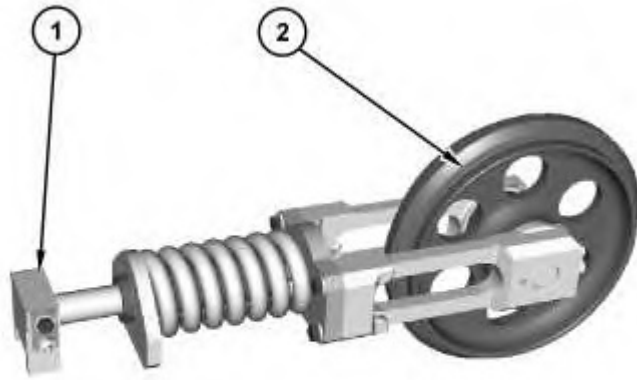


Illustration 1

g02817498

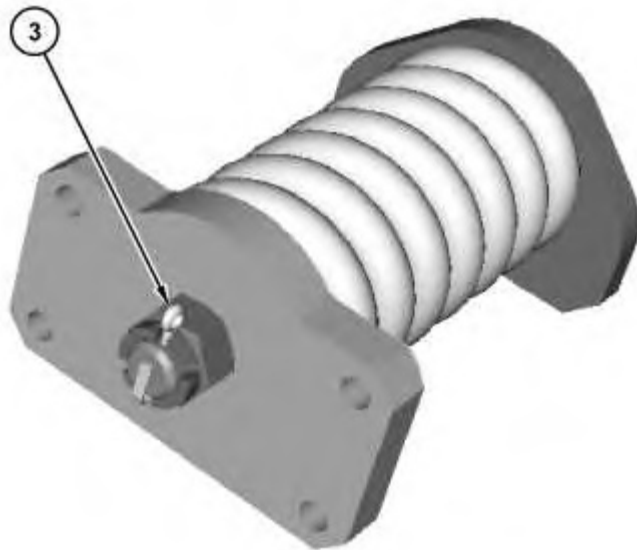


Illustration 2

g02817536

1. Remove hydraulic track adjuster (1). Remove the front idler (2). Remove cotter pin (3).
-

Thank you so much for reading.
Please click the “Buy Now!”
button below to download the
complete manual.



After you pay.

You can download the most
perfect and complete manual in
the world immediately.

Our support email:

ebooklibonline@outlook.com