

407B ZX, 408B ZX, 409B Z, 410B ZX, 411B ZX

[Section 1 - General Information](#)

[Section 2 - Care and Safety](#)

[Section 3 - Maintenance](#)

[Section B - Body and Framework](#)

[Section C - Electrics](#)

[Section E - Hydraulics](#)

[Section F - Transmission](#)

[Section G - Brakes](#)

[Section H - Hydraulic Steering](#)

[Section K - Engine](#)



Publication No.
9803/4210-08



Copyright © 2004 JCB SERVICE. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB SERVICE.

Issued by JCB Technical Publications, JCB Aftermarket Training, Woodseat, Rocester, Staffordshire, ST14 5BW, England. Tel +44 1889 591300 Fax +44 1889 591400

World Class
Customer Support

Notes:

Section 1



General Information

Service Manual - 407B ZX, 408B ZX, 409B Z, 410B ZX, 411B ZX

[Section 1 - General Information](#)

[Section 2 - Care and Safety](#)

[Section 3 - Maintenance](#)

[Section B - Body and Framework](#)

[Section C - Electrics](#)

[Section E - Hydraulics](#)

[Section F - Transmission](#)

[Section G - Brakes](#)

[Section H - Hydraulic Steering](#)

[Section K - Engine](#)



Publication No.
9803/4210-08



Copyright © 2004 JCB SERVICE. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB SERVICE.

Issued by JCB Technical Publications, JCB Aftermarket Training, Woodseat, Rocester, Staffordshire, ST14 5BW, England. Tel +44 1889 591300 Fax +44 1889 591400

World Class
Customer Support

Notes:



Section 1 - General Information

Contents	Page No.
Introduction	
About this Publication	1 - 1
Identifying your Machine	
Identification Plates	1 - 2
Identification Plate	1 - 2
Explanation of Vehicle Identification Number (VIN)	1 - 2
Unit Identification	1 - 2
Typical Engine Identification Number	1 - 2
Torque Settings	
JCB Standard Torque Settings B.S.P. Port Connection (Colour Coded)	1 - 4
JCB Standard Torque Settings for Hose Ends andFlanged Fittings (Colour Coded)	1 - 5
Zinc Plated Fasteners (golden finish)	1 - 6
UNF Grade `S' Bolts	1 - 6
Metric Grade 8.8 Bolts	1 - 6
Rivet Nut Bolts/Screws	1 - 6
Service Tools	
Numerical List Section B - Body and Framework	1 - 7
Tool Detail Reference Section B - Body and Framework	1 - 8
Numerical List Section C - Electrics	1 - 11
Tool Detail Reference Section C - Electrics	1 - 12
Numerical List Section E - Hydraulics	1 - 13
Tool Detail Reference Section E- Hydraulics	1 - 15
Numerical List Section F - Transmission	1 - 18
Tool Detail Reference Section F - Transmission	1 - 19
Numerical List Section K - Engine	1 - 22
Tool Detail Reference Section K - Engine	1 - 23
Service Consumables	
Sealing and Retaining Compounds	1 - 24



Section 1 - General Information

Contents

Page No.

Introduction

About this Publication

This publication is designed for the benefit of JCB Distributor Service Engineers who are receiving, or have received, training by JCB Technical Training Department.

These personnel should have a sound knowledge of workshop practice, safety procedures, and general techniques associated with the maintenance and repair of hydraulic earthmoving equipment.

Renewal of oil seals, gaskets, etc., and any component showing obvious signs of wear or damage is expected as a matter of course. It is expected that components will be cleaned and lubricated where appropriate, and that any opened hose or pipe connections will be blanked to prevent excessive loss of hydraulic fluid and ingress of dirt. Finally, please remember above all else **SAFETY MUST COME FIRST!**

The manual is compiled in sections, the first three are numbered and contain information as follows:

- 1** General Information - includes torque settings and service tools.
- 2** Care & Safety - includes warnings and cautions pertinent to aspects of workshop procedures etc.
- 3** Routine Maintenance - includes service schedules and recommended lubricants for all the machine.

The remaining sections are alphabetically coded and deal with Dismantling, Overhaul etc. of specific components, for example:

- A** Attachments
- B** Body & Framework...etc.

The page numbering in each alphabetically coded section is not continuous. This allows for the insertion of new items in later issues of the manual.

Section contents, technical data, circuit descriptions, operation descriptions etc. are inserted at the beginning of each alphabetically coded section.

All sections are listed on the front cover; tabbed divider cards align directly with individual sections on the front cover for rapid reference.

Where a torque setting is given as a single figure it may be varied by plus or minus 3%. Torque figures indicated are for dry threads, hence for lubricated threads may be reduced by one third.

'Left Hand' and 'Right Hand' are as viewed from the rear of the machine facing forwards.

Identifying your Machine

Identification Plates

Identification Plate

Your machine has an identification plate **1-X** mounted on the left hand side of the machine on the loader arm pillar. The serial numbers of the machine and its major units are stamped on the plate.

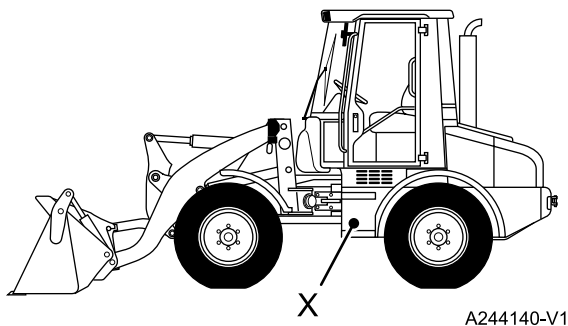


Fig 1.

Explanation of Vehicle Identification Number (VIN)

1	2	3	4	5	6	7
SLP	409	A	L	T	E	0755001

- 1 World Manufacturer Identification, SLP = JCB
- 2 Machine Model, 407, 408, 409
- 3 Build (A = Articulated), (O = Others)
- 4 Type (L = Loader), (F = Farmmaster)
- 5 Year of Manufacture (T = 1996, V = 1997, W = 1998, X = 1999, Y = 2000, 1 = 2001, 2 = 2002, 3 = 2003, 4 = 2004, 5 = 2005, 6 = 2006, 7 = 2007, 8 = 2008, 9 = 2009, A = 2010)
- 6 Manufacturing Location (E = England)
- 7 Machine Serial Number (0755001)

The serial number of each major unit is also stamped on the unit itself. If a major unit is replaced by a new one, the serial number on the identification plate will be wrong. Either stamp the new number of the unit on the identification plate, or simply stamp out the old number. This will prevent the wrong unit number being quoted when replacement parts are ordered.

The machine and engine serial numbers can help identify exactly the type of equipment you have.

Unit Identification

The engine serial number is stamped on a plate **2-Y** which is fastened to the right side of the cylinder block, near the fuel filter.

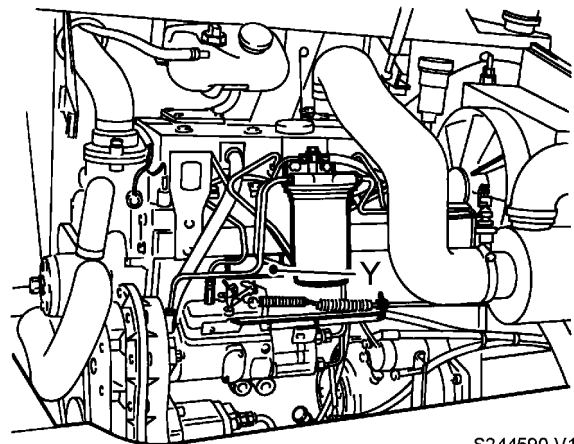


Fig 2.

Typical Engine Identification Number

1	2	3	4	5
AA	50261	U	500405	P

- 1 Engine Type,
 - a AA = 4 cylinder naturally aspirated, AB = 4 cylinder turbo



Section 1 - General Information

Identifying your Machine

Identification Plates

- 2 Build Number
- 3 Country of Origin
- 4 Engine Sequence Number
- 5 Year of Manufacture

Torque Settings

JCB Standard Torque Settings B.S.P. Port Connection (Colour Coded)

Note: All adapters, elbows and hoses should be tightened to JCB standard torque settings unless stated otherwise.


	20Nm	1/8" ADAPTOR 14mm AF		122Nm	5/8" ADAPTOR 30mm AF
	34Nm	1/4" ADAPTOR 19mm AF		183Nm	3/4" ADAPTOR 32mm AF
	78Nm	3/8" ADAPTOR 22mm AF		203Nm	1" ADAPTOR 41mm AF
	105Nm	1/2" ADAPTOR 27mm AF		302Nm	1 1/4" ADAPTOR

SOP 600-005-V1

Fig 3.

JCB Standard Torque Settings for Hose Ends and Flanged Fittings (Colour Coded)

Note: All adapters, elbows and hoses should be tightened to JCB standard torque settings unless stated otherwise.

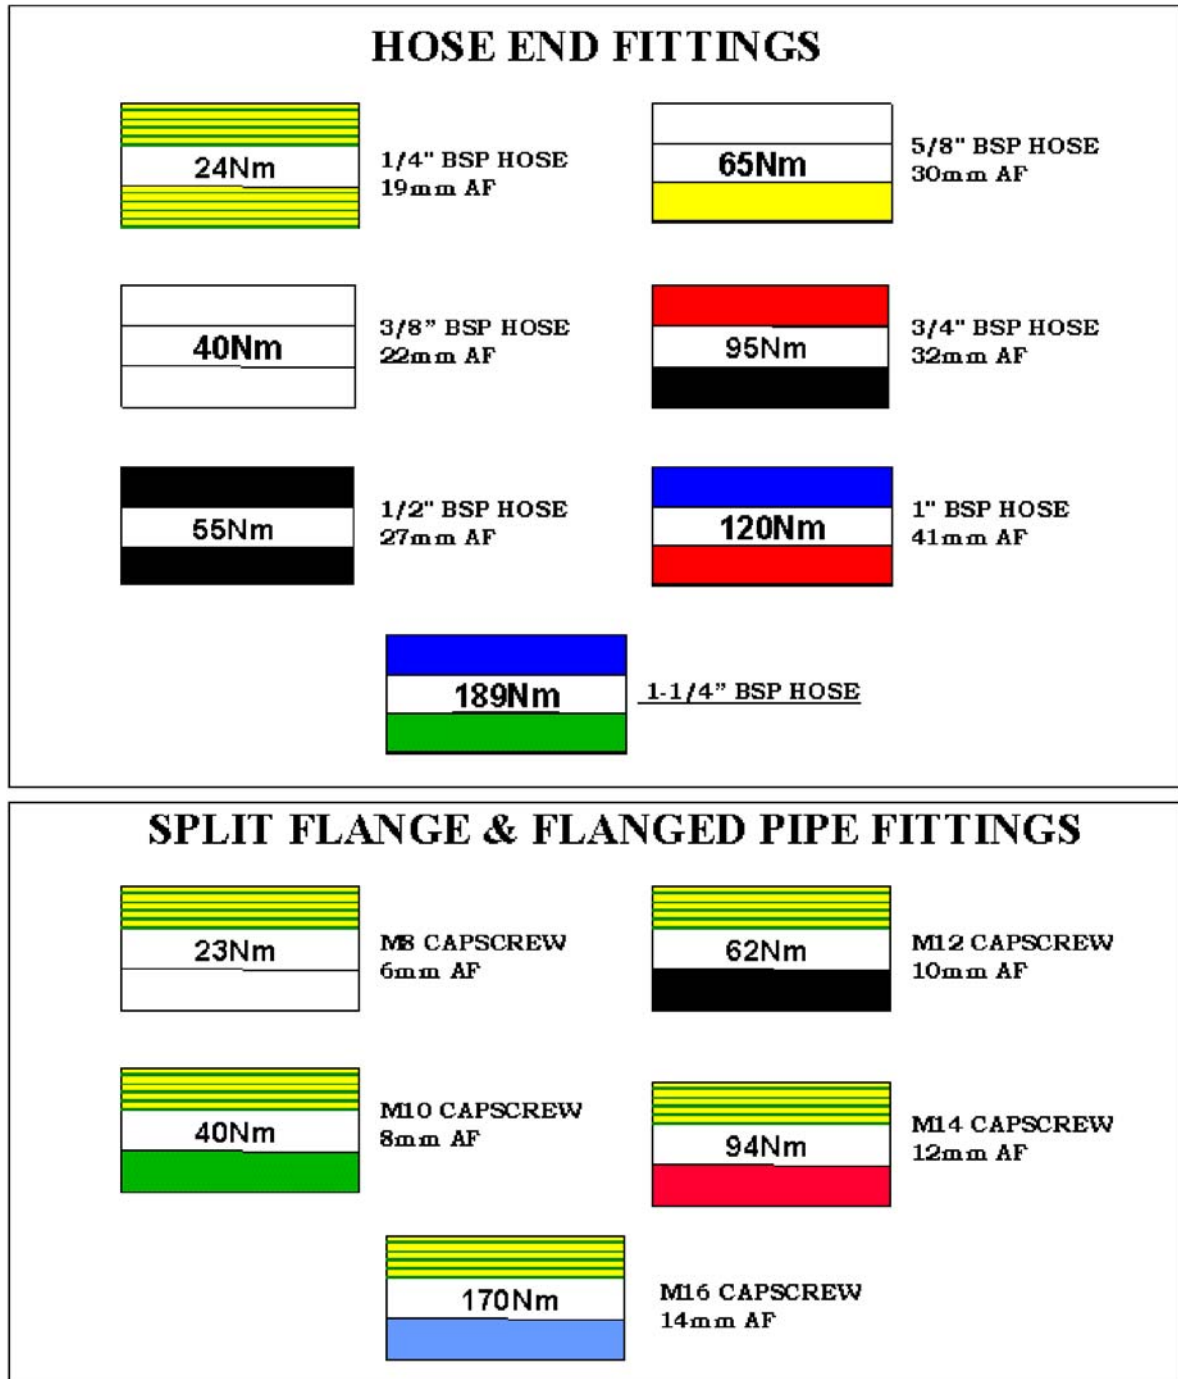

SOP 600-003-V1

Fig 4.

Zinc Plated Fasteners (golden finish)

Use only where no torque setting is specified in the text. Values are for dry threads and may be within three per cent of the figures stated. For lubricated threads the values should be REDUCED by one third.

UNF Grade 'S' Bolts

Bolt size			Torque Settings		
Dia.	(mm)	Hexagon (A/F) mm	Nm	kgf m	lbf ft
1/4	6.3	7/16	14	1.4	10
5/16	7.9	1/2	28	2.8	20
3/8	9.5	9/16	49	5.0	36
7/16	11.1	5/8	78	8.0	58
1/2	12.7	3/4	117	12.0	87
9/16	14.3	13/16	170	17.3	125
5/8	15.9	15/16	238	24.3	175
3/4	19	1 1/8	407	41.5	300
7/8	22.2	1 5/16	650	66.3	480
1	25.4	1 1/2	970	99.0	715
1 1/4	31.7	1 7/8	1940	198.0	1430
1 1/2	38.1	2 1/4	3390	345.0	2500

Metric Grade 8.8 Bolts

Bolt size			Torque Settings		
Dia.	(mm)	Hexagon (A/F) mm	Nm	kgf m	lbf ft
M5	(5)	8	7	0.7	5
M6	(6)	10	12	1.2	9
M8	(8)	13	28	3.0	21
M10	(10)	17	56	5.7	42
M12	(12)	19	98	10	72
M16	(16)	24	244	25	180
M18	(18)	27	350	36	258
M20	(20)	30	476	48	352
M24	(24)	36	822	84	607
M30	(30)	46	1633	166	1205
M36	(36)	55	2854	291	2105

Rivet Nut Bolts/Screws

Bolt size		Torque Settings (for steel rivet nuts)		
Dia.	(mm)	Nm	kgf m	lbf ft
M3	(3)	1.2	0.12	0.9
M4	(4)	3.0	0.3	2.0
M5	(5)	6.0	0.6	4.5
M6	(6)	10.0	1.0	7.5
M8	(8)	24.0	2.5	18.0
M10	(10)	48.0	4.9	35.5
M12	(12)	82.0	8.4	60.5

Note: All bolts used on JCB machines are high tensile and must not be replaced by bolts of a lesser tensile specification.

Service Tools


Numerical List Section B - Body and Framework

The tools listed in the table are special tools required for removal and replacement of Body and Framework parts. These tools are available from JCB Service.

Note: Tools other than those listed will be required. It is expected that such general tools will be available in any well equipped workshop or be available locally from any good tool supplier.

Part Number	Description	Tool Detail Reference
826/01179	M6 x 16mm Rivet Nut	⇒ Fig 5. (□ 1-8)
826/01106	M6 x 19mm Rivet Nut	⇒ Fig 5. (□ 1-8)
826/01177	M8 x 18mm Rivet Nut	⇒ Fig 5. (□ 1-8)
826/01176	M10 x 23mm Rivet Nut	⇒ Fig 5. (□ 1-8)
826/01333	M10 x 26mm Rivet Nut	⇒ Fig 5. (□ 1-8)
892/00842	Glass Lifter	⇒ Fig 7. (□ 1-8)
892/00843	Glass Stand	⇒ Fig 6. (□ 1-8)
892/00844	Long Knife	⇒ Fig 15. (□ 1-10)
892/00846	Glass Extractor (Handles)	⇒ Fig 12. (□ 1-9)
892/00847	Nylon Spatula	⇒ Fig 8. (□ 1-8)
892/00848	Wire Starter	⇒ Fig 10. (□ 1-9)
892/00849	Braided Cutting Wire	⇒ Fig 14. (□ 1-10)
926/15500	Rubber Spacer Blocks	⇒ Fig 9. (□ 1-9)
992/07000	Peg Spanner for Quickhitch	⇒ Fig 16. (□ 1-10)
992/06902	Replacement Pegs	⇒ Fig 16. (□ 1-10)
992/12800	Cut-Out Knife	⇒ Fig 11. (□ 1-9)
992/12801	'L' Blades	⇒ Fig 13. (□ 1-10)


Tool Detail Reference Section B - Body and Framework

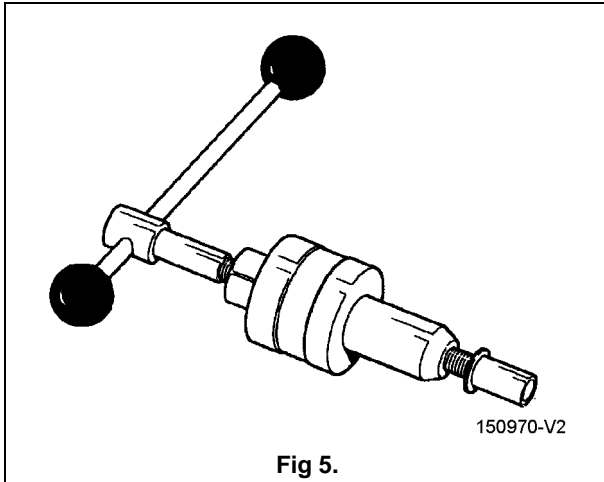


Note: 826/01179 M6 x 16mm Rivet Nut, 826/01106 M6 x 19mm Rivet Nut, 826/01177 M8 x 18mm Rivet Nut, 826/01176 M10 x 23mm Rivet Nut, 826/01333 M10 x 26mm Rivet Nut

Installation Tool Available from:


Bollhoff Fastenings Ltd.
Midacre
The Willenhall Estate
Rose Hill
Willenhall
West Midlands, WV13 2JW

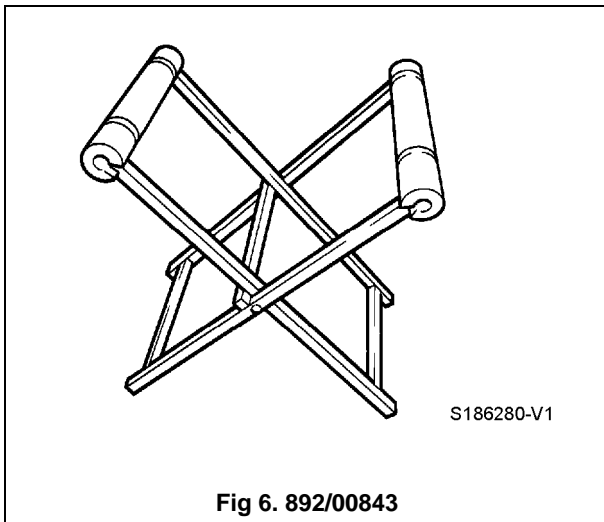

Note: essential for preparing new glass prior to installation.

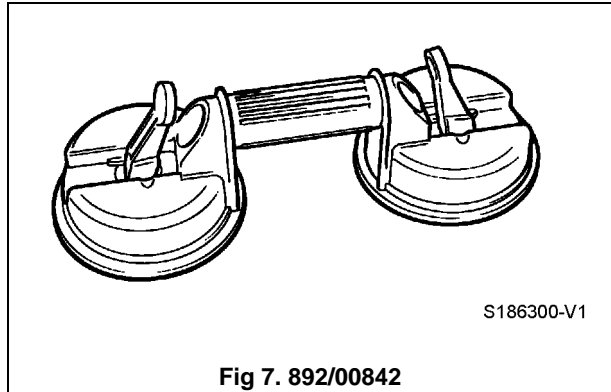

Note: - minimum 2 off - essential for glass installation, 2 required to handle large panes of glass. Ensure suction cups are protected from damage during storage.

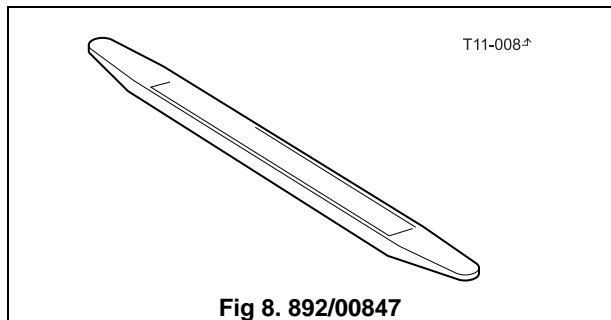

Note: - general tool used for smoothing sealants - also used to re-install glass in rubber glazing because metal tools will chip the glass edge.



Our support email:

ebooklibonline@outlook.com